




PETRAX

CAT GET **PETRAX**

EDITION - EDICION 2020


Wheel Loader / Bachkoe Loader

Cargadoras / Mixtas

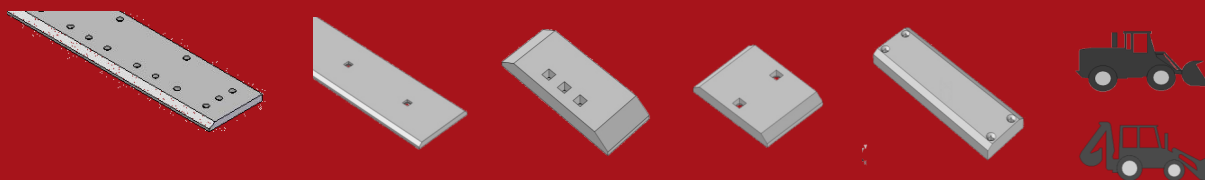


Dozer / Compactor

Bullldozer / Compactador

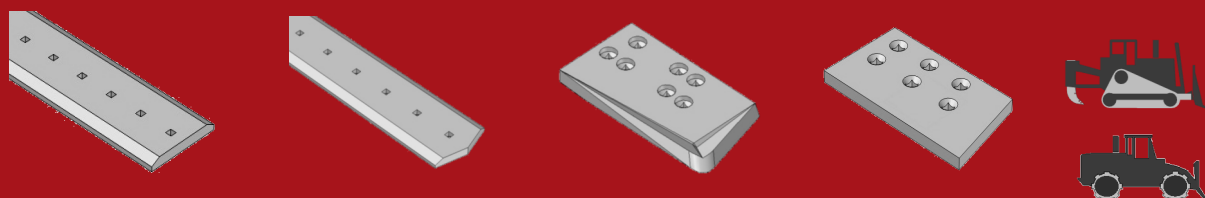


Rippers

Rippers

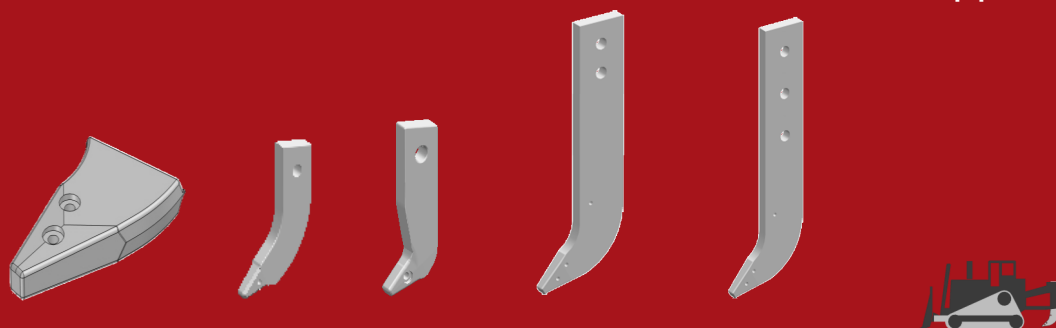


Motor Grader

Motoniveladoras

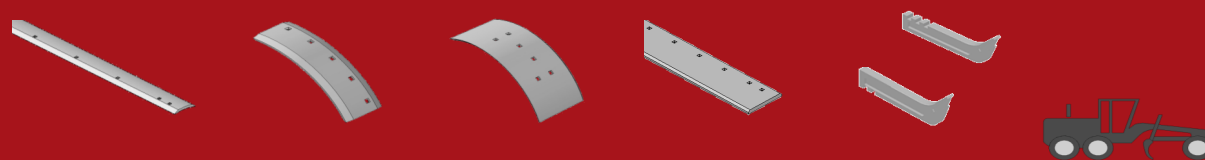







Scrapers


Mototraillas

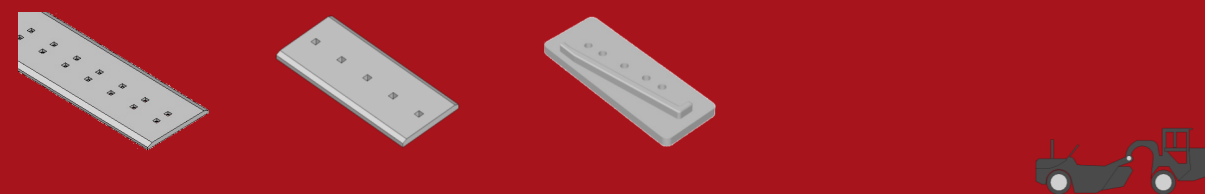

Ground engaging tools Caterpillar® Equipment

Recambios para maquinas Caterpillar®


		Pag.
Bucket Base Edges - No Segment Holes. Cuchilla Base Cucharón - Sin taladros de Segmentos.		5 - 19
Bucket Base Edges - With Segment Holes. Cuchilla Base Cucharón - Con taladros de Segmentos.		20 - 45
Bolt-On Cutting Edges - Center. Subcuchillas - Central.		46-74
Corner Guard System End Bits. Subcantonera de protección - Lateral.		75-81
Bolt-On Edge Segments. Segmentos.		82-94
Rear Wear Plates. Refuerzos Cucharón.		95-97

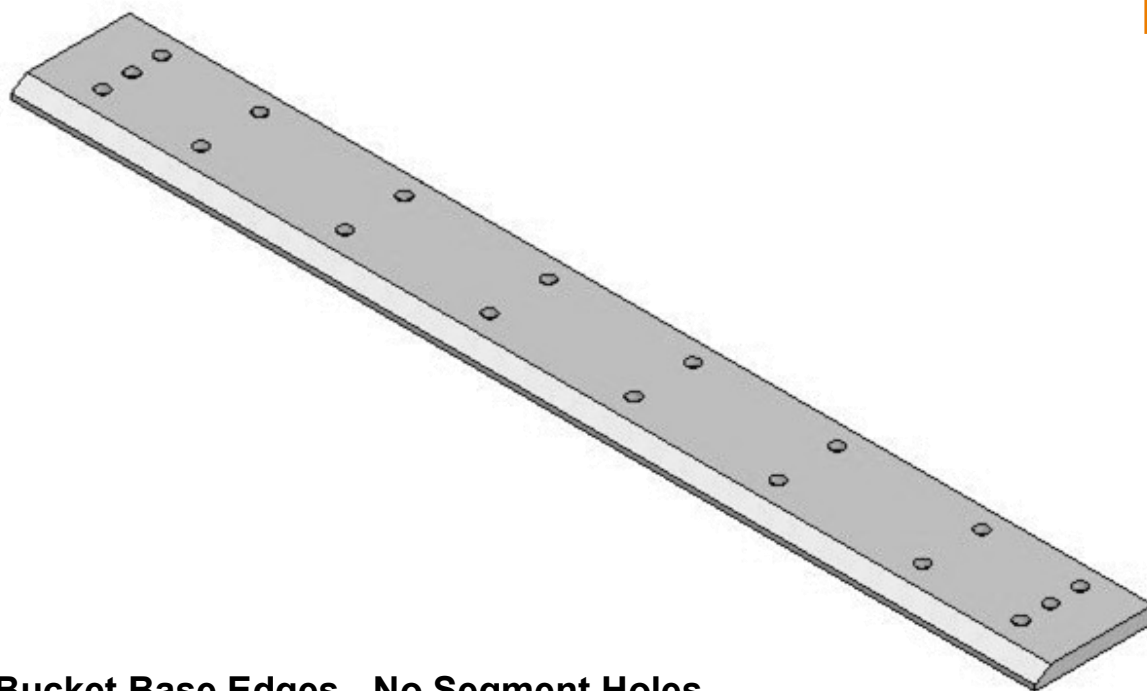

Bucket Base Edges - No Segment Holes.

Cuchilla Base Cucharón - Sin taladros de Segmentos.


Reference	Thick - Grueso		Width - Ancho		Length - Largo		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	
5G2808	19.05 mm	0.75"	191.0 mm	7.51"	1823.0 mm	71.80"	6
6S6501	19.05 mm	0.75"	191.0 mm	7.51"	1898.0 mm	74.72"	7
4V8850	25.4 mm	1.00"	245.0 mm	9.65"	2202.0 mm	86.70"	8
9R4672	19.0 mm	0.75"	152.4 mm	6.00"	2262.0 mm	89.05"	9
8V7453	25.4 mm	1.00"	245.0 mm	9.65"	2248.0 mm	88.50"	10
4V4958	32.0 mm	1.25"	282.0 mm	11.10"	2268.0 mm	89.30"	11
5V4670	25.4 mm	1.00"	245.0 mm	9.65"	2370.0 mm	93.30"	12
9R5313	19.0 mm	0.75"	152.4 mm	6.00"	2396.0 mm	94.30"	13
8A8443	25.4 mm	1.00"	245.0 mm	9.65"	2574.0 mm	101.30"	14
5V0600	38.0 mm	1.50"	300.0 mm	11.81"	2602.0 mm	102.50"	15
8V1825	25.4 mm	1.00"	245.0 mm	9.65"	2639.0 mm	103.90"	16
5V4696	32.0 mm	1.25"	282.0 mm	11.10"	2736.0 mm	107.74"	17
7V0898	38.0 mm	1.50"	300.0 mm	11.81"	2805.0 mm	110.40"	17
7V6844	38.0 mm	1.50"	300.0 mm	11.81"	2912.0 mm	114.72"	18
7V1490	38.0 mm	1.50"	300.0 mm	11.81"	3032.0 mm	119.37"	18
7V4188	45.0 mm	1.75"	305.0 mm	12.00"	3315.0 mm	130.50"	19

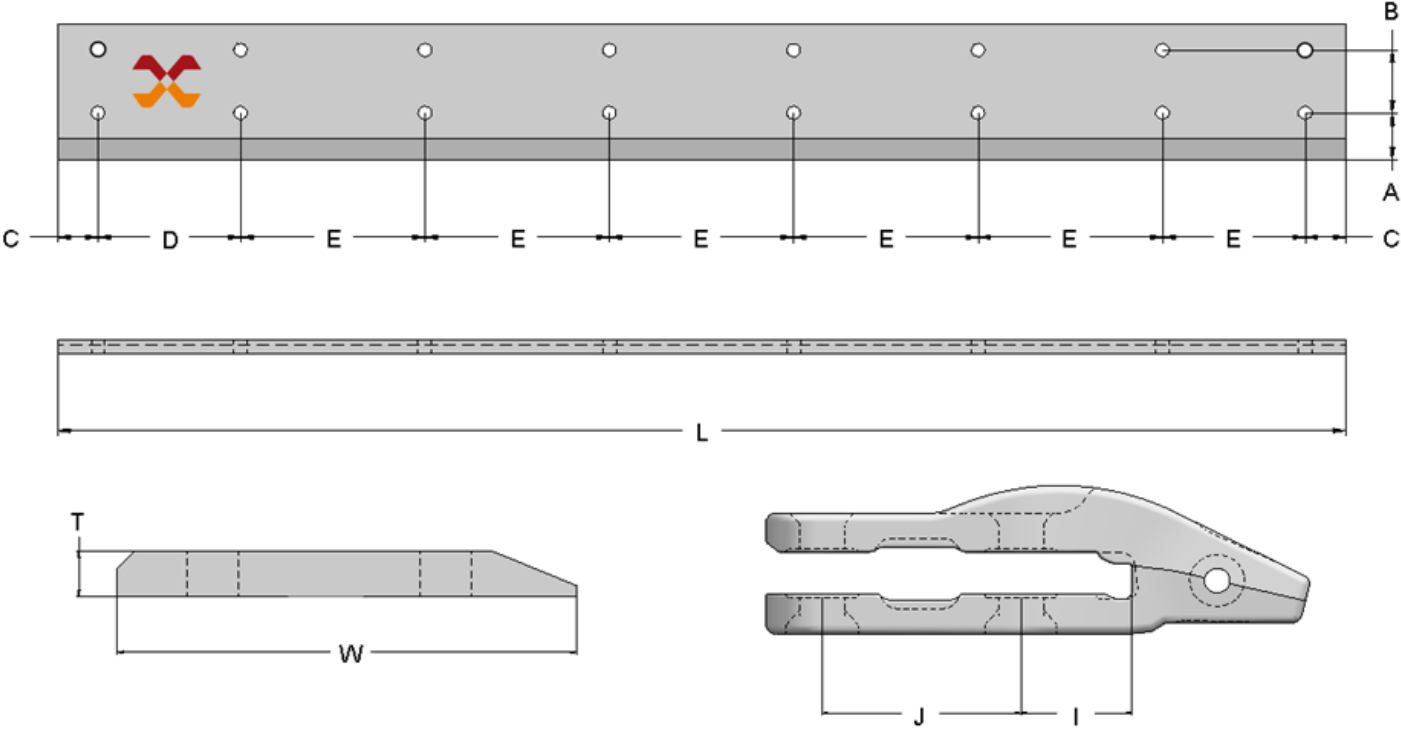

5G2808


9J4207

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	19.05 mm.	0.75"	A	67.0 mm.	2.63"	I	67.0 mm.	2.62"
W	191.0 mm.	7.51"	B	89.0 mm.	3.50"	J	89.0 mm.	3.50"
L	1823.0 mm.	71.80"	C	57.0 mm.	2.24"	Holes & Weight		Taladros y Peso
			D	202.0 mm.	7.95"	Qty	16	
			E	261.0 mm.	10.27"	Bolt	19.00 mm.	0.75"(3/4")
						Weight	48.53 Kg	107.0 Lbs

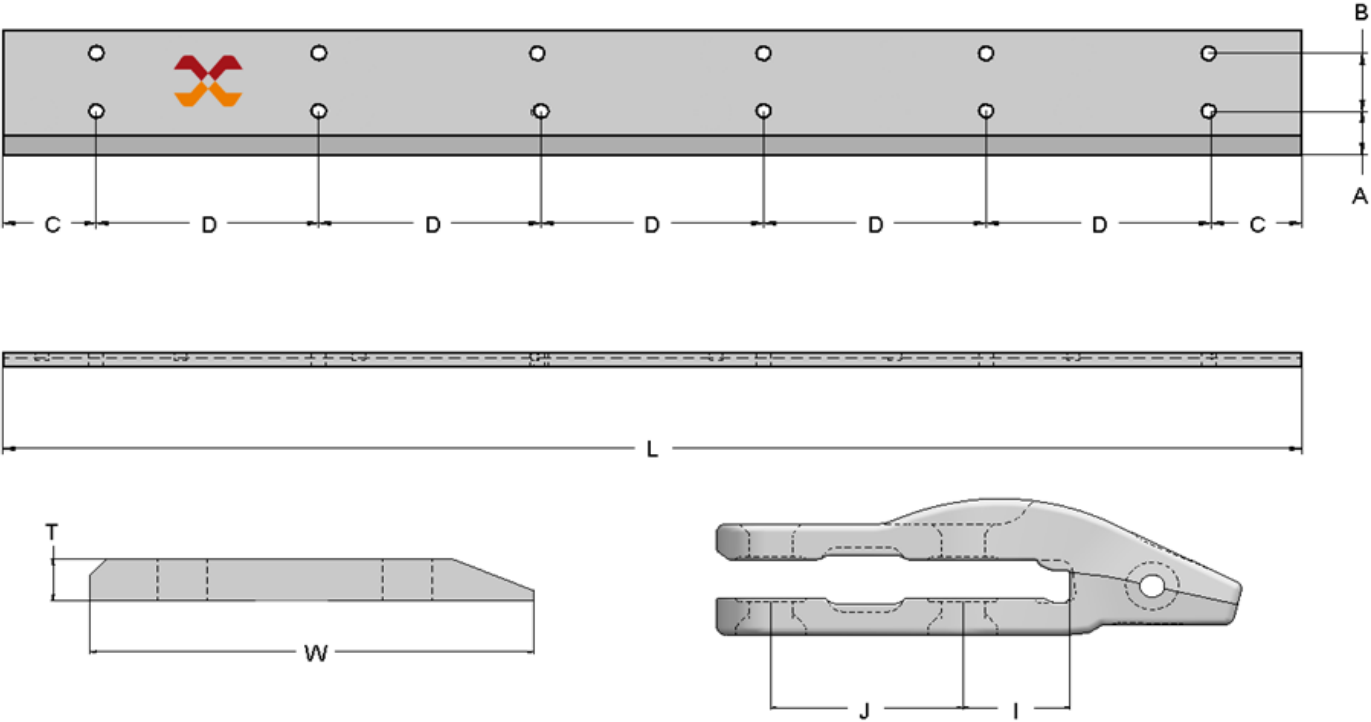

6S6501


Dimensions - Base Edge			Hole Spacing			Adapter		9J4207	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	19.05 mm.	0.75"	A	67.0 mm.	2.63"	I	67.0 mm.	2.62"	
W	191.0 mm.	7.51"	B	89.0 mm.	3.50"	J	89.0 mm.	3.50"	
L	1898.0 mm.	74.72"	C	136.2 mm.	5.36"	Holes & Weight		Taladros y Peso	
			D	325.1 mm.	12.80"	Qty	12		
						Bolt	19.00 mm.		0.75"(3/4")
						Weight	49.90 Kg		110.0 Lbs

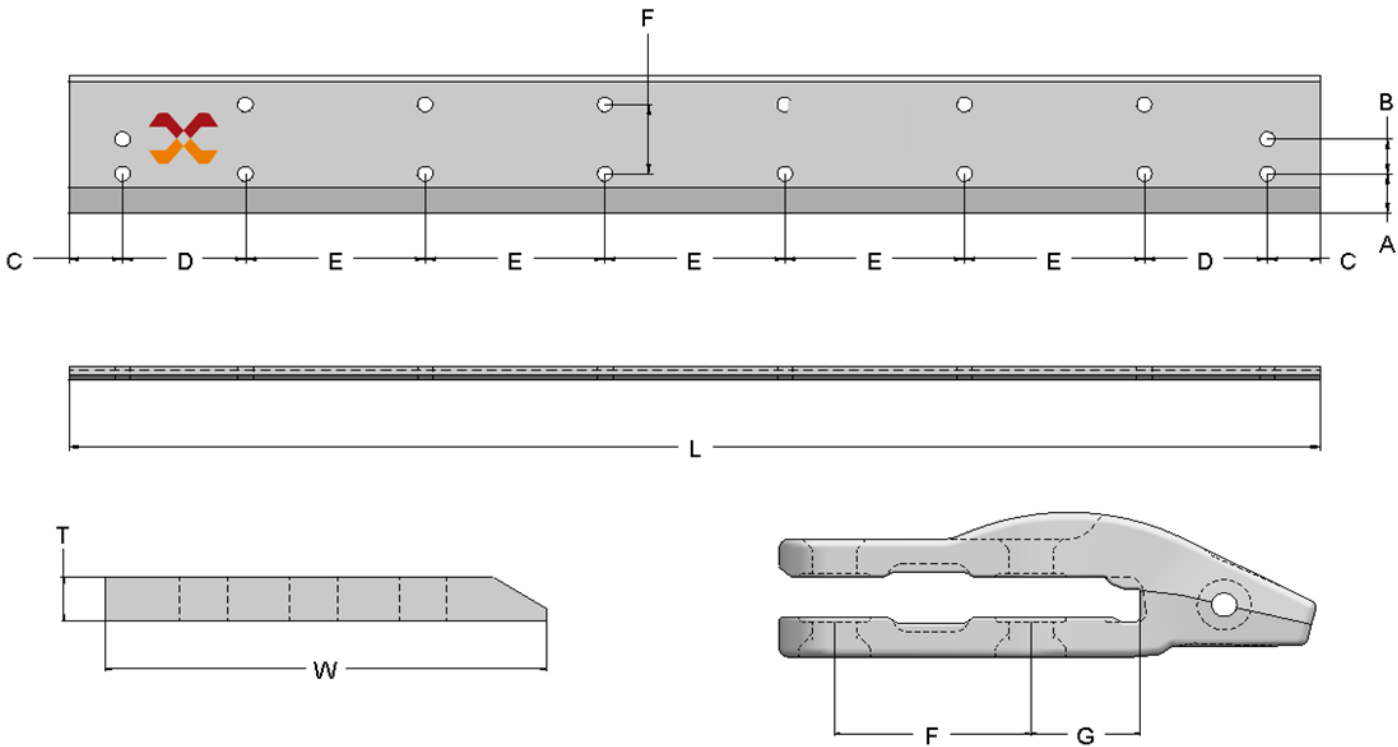

4V8850


1U0257

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	F	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	G	70.0 mm.	2.75"
L	2202.0 mm.	86.70"	C	94.0 mm.	3.70"	Holes & Weight		Taladros y Peso
			D	217.0 mm.	8.54"	Qty	16	
			E	316.0 mm.	12.44"	Bolt	25.4 mm.	1"
						Weight	102.97 Kg	227.0 Lbs

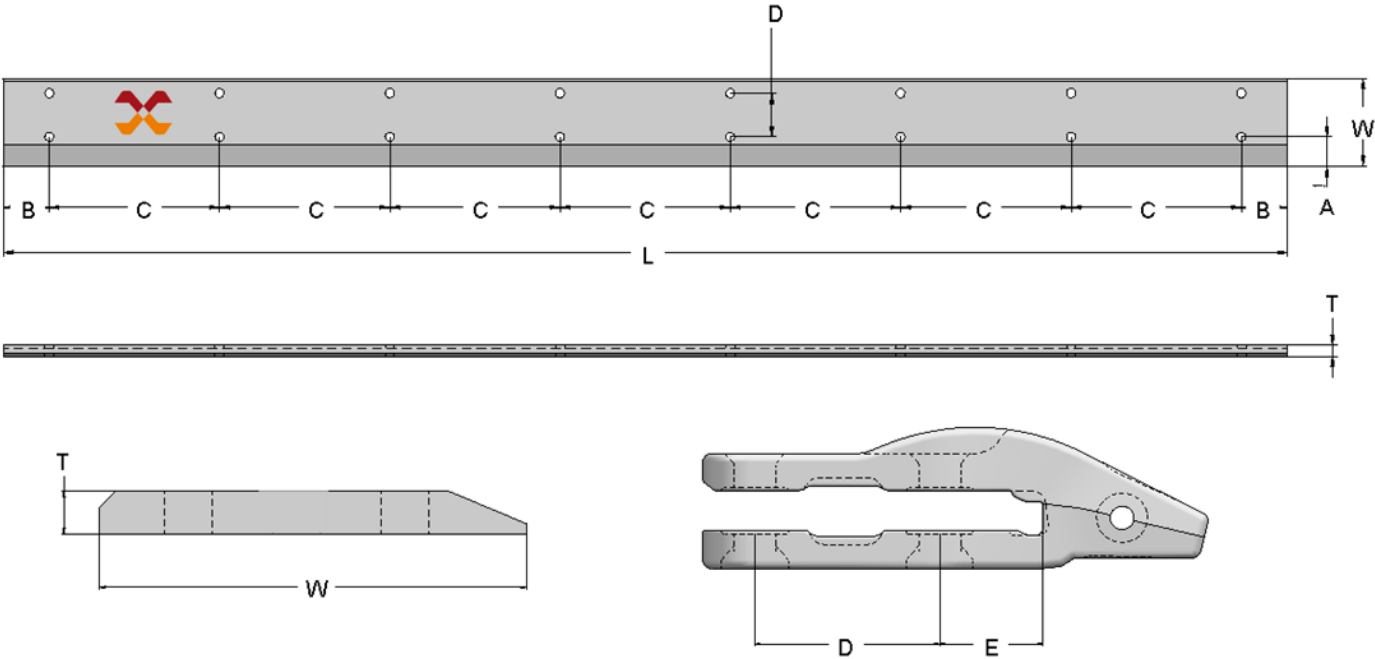

9R4672


Dimensions - Base Edge			Hole Spacing			Adapter		8E2184
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	19.0 mm.	0.75"	A	50.8 mm.	2.00"	D	75.0 mm.	2.95"
W	152.4 mm.	6.00"	B	81.0 mm.	3.18"	E	60.0 mm.	2.36"
L	2262.0 mm.	89.05"	C	300.0 mm.	11.81"	Holes & Weight		Taladros y Peso
						Qty	16	
						Bolt	16.0 mm.	0.625"(5/8")
						Weight	47.17 Kg	104.4 Lbs

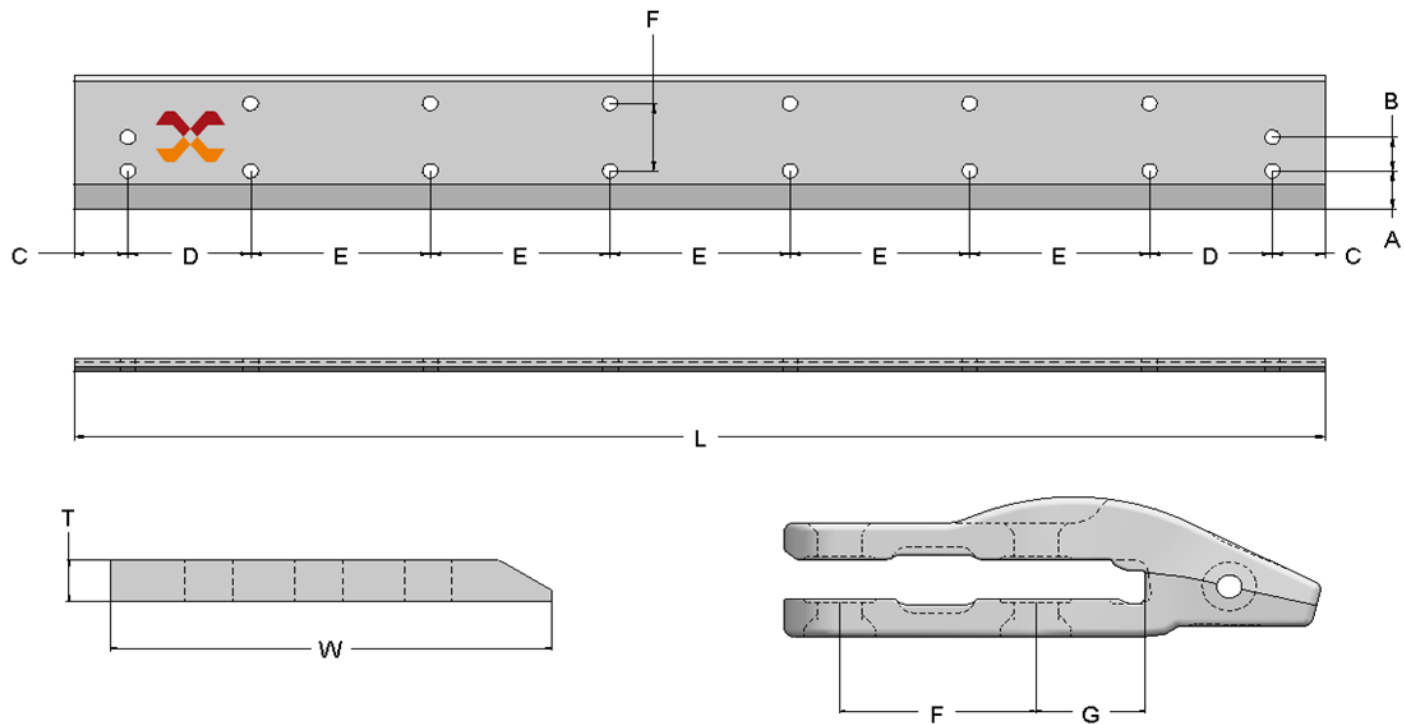

8V7453


1U0257

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	F	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	G	70.0 mm.	2.75"
L	2248.0 mm.	88.50"	C	98.5 mm.	3.87"	Holes & Weight		Taladros y Peso
			D	235.5 mm.	9.27"	Qty	16	
			E	316.0 mm.	12.44"	Bolt	25.4 mm.	1"
						Weight	93.89 Kg	207.0 Lbs

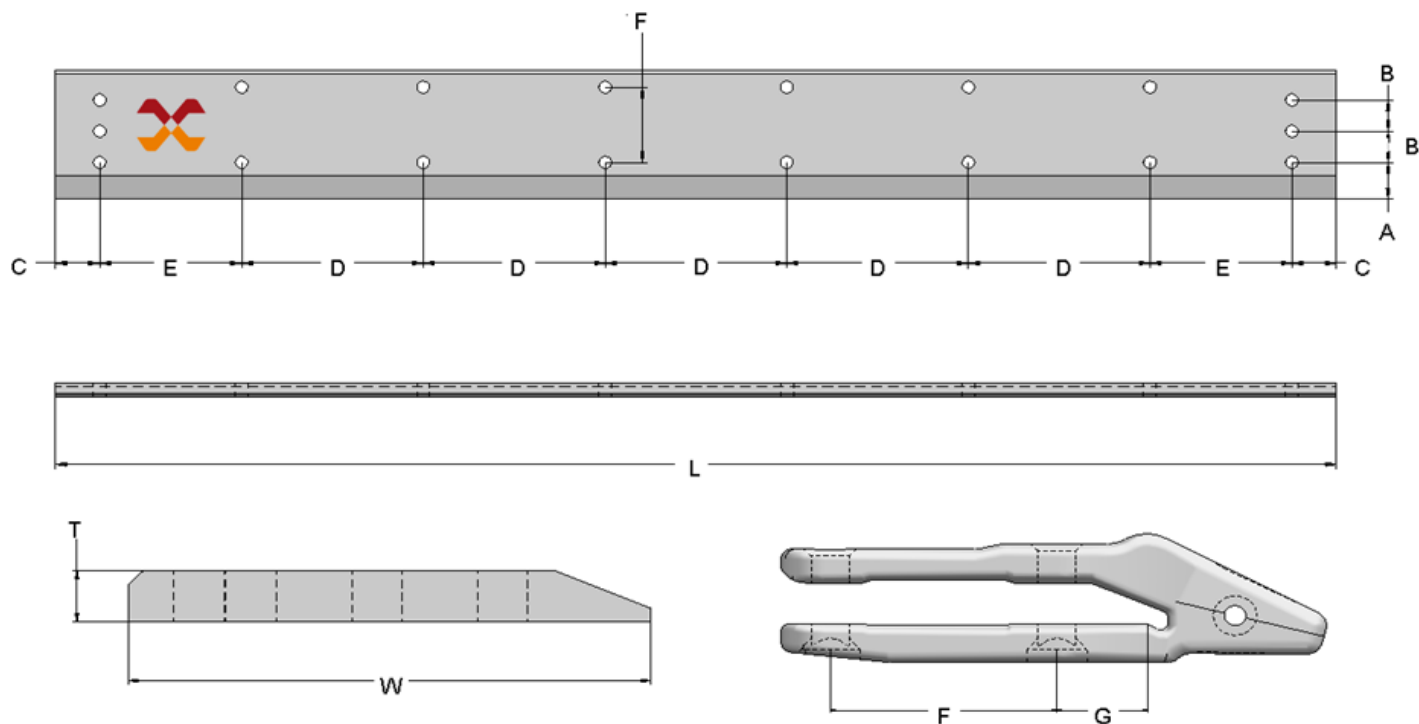

4V4958


Dimensions - Base Edge			Hole Spacing			Adapter		4T4307	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	32.0 mm.	1.25"	A	79.0 mm.	3.12"	F	165.0 mm.	6.50"	
W	282.0 mm.	11.10"	B	68.0 mm.	2.67"	G	81.2 mm.	3.20"	
L	2268.0 mm.	89.30"	C	93.5 mm.	3.68"	Holes & Weight		Taladros y Peso	
			D	322.0 mm.	2.68"	Qty	18		
			E	235.5 mm.	9.27"	Bolt	25.4 mm.		1"
						Weight	158.30 Kg		349.0 Lbs

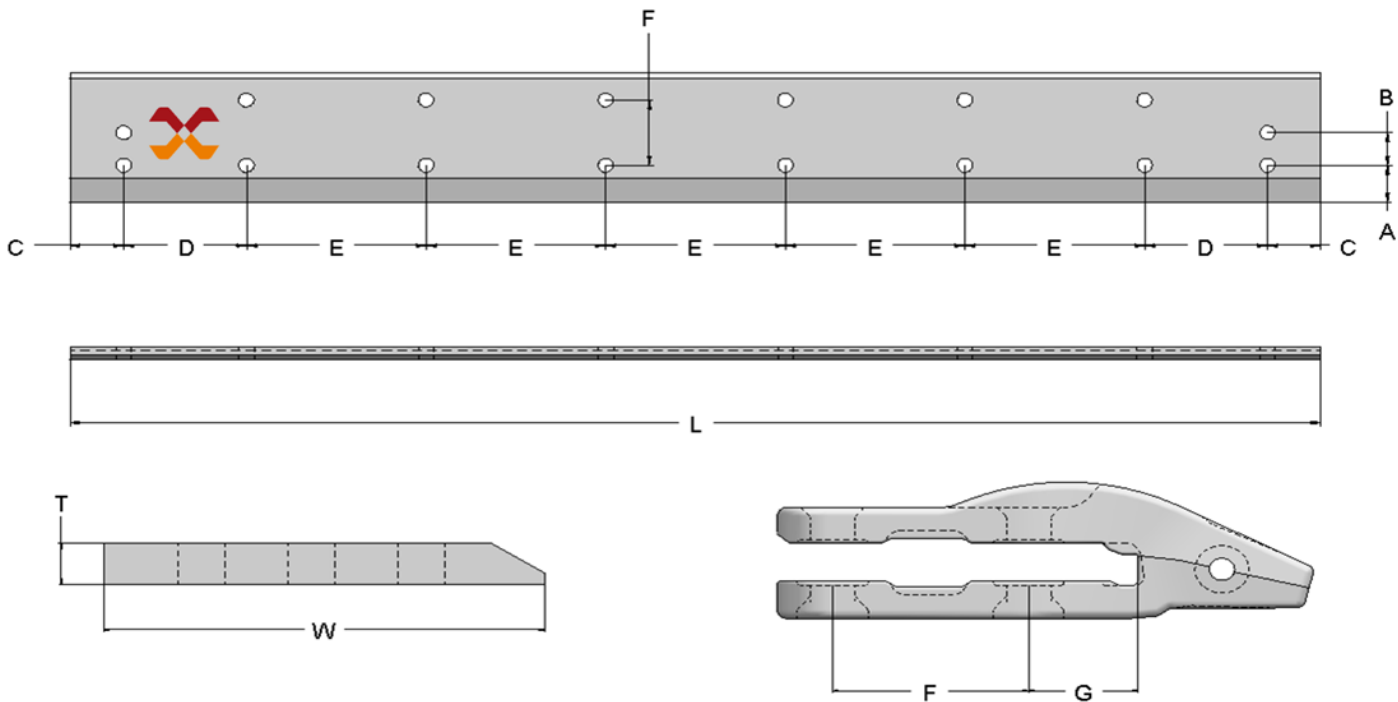

5V4670


1U0257

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	F	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	G	70.0 mm.	2.75"
L	2370.0 mm.	93.30"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	249.0 mm.	9.80"	Qty	16	
			E	336.5 mm.	13.25"	Bolt	25.4 mm.	1"
						Weight	111.13 Kg	245.0 Lbs

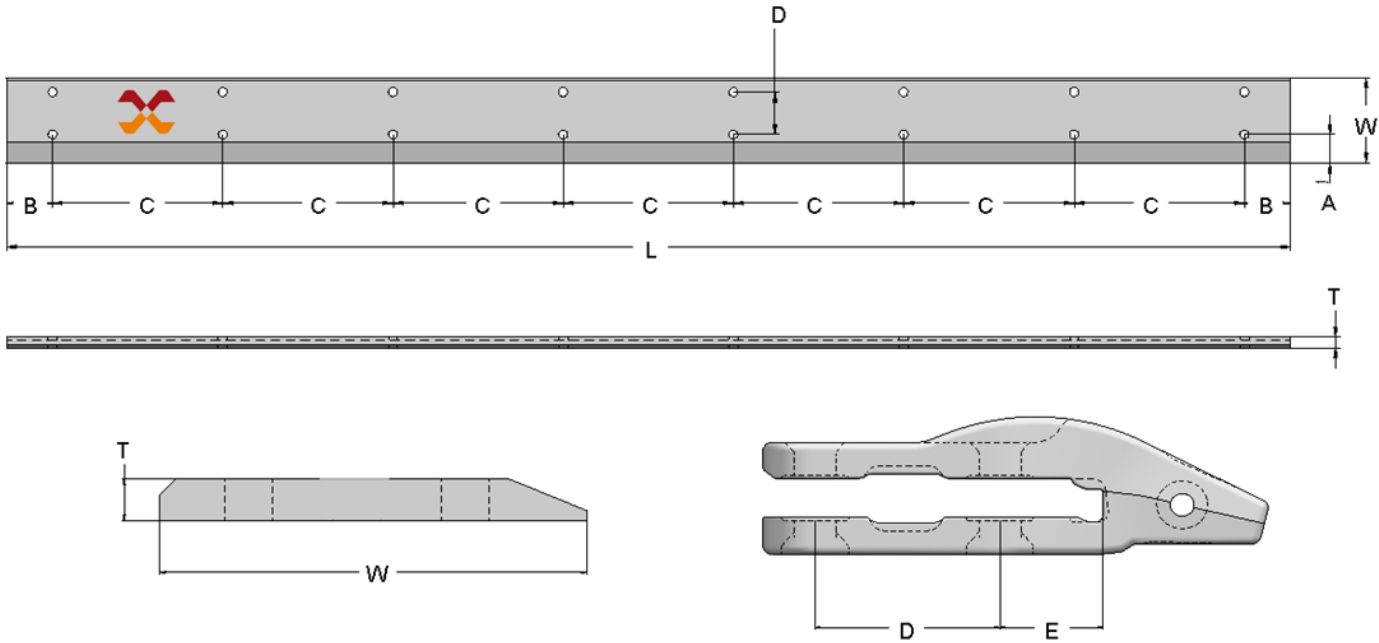

9R5313


Dimensions - Base Edge			Hole Spacing			Adapter		8E2184
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	19.0 mm.	0.75"	A	50.8 mm.	2.00"	D	75.0 mm.	2.95"
W	152.4 mm.	6.00"	B	131.2 mm.	5.16"	E	60.0 mm.	2.36"
L	2396.0 mm.	94.30"	C	304.8 mm.	12.00"	Holes & Weight		Taladros y Peso
						Qty	16	
						Bolt	16.0 mm.	0.625"(5/8")
						Weight	51.07 Kg	112.6 Lbs

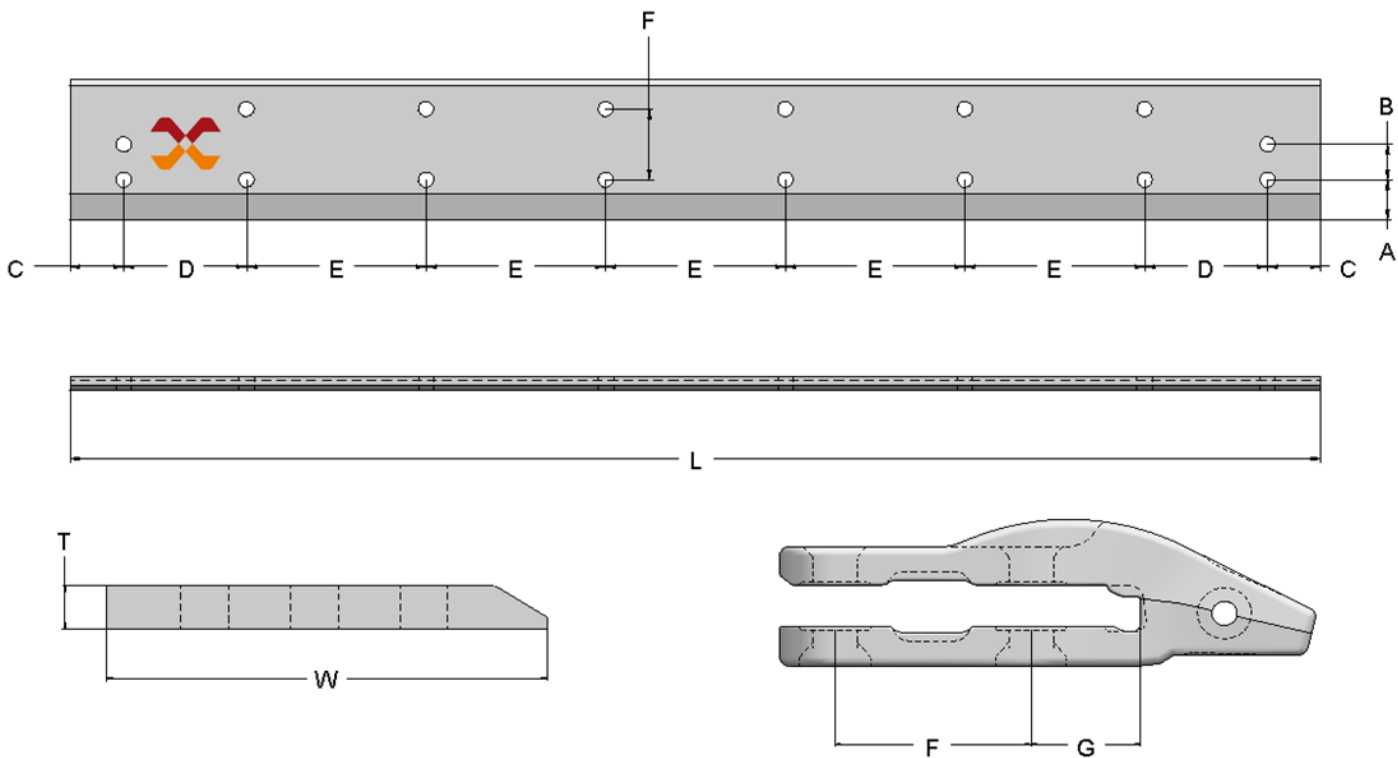

8A8443


1U0257

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	F	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	G	70.0 mm.	2.75"
L	2574.0 mm.	101.30"	C	97.0 mm.	3.81"	Holes & Weight		Taladros y Peso
			D	245.0 mm.	9.64"	Qty	16	
			E	378.0 mm.	12.88"	Bolt	25.4 mm.	1"
						Weight	107.56 Kg	236.0 Lbs

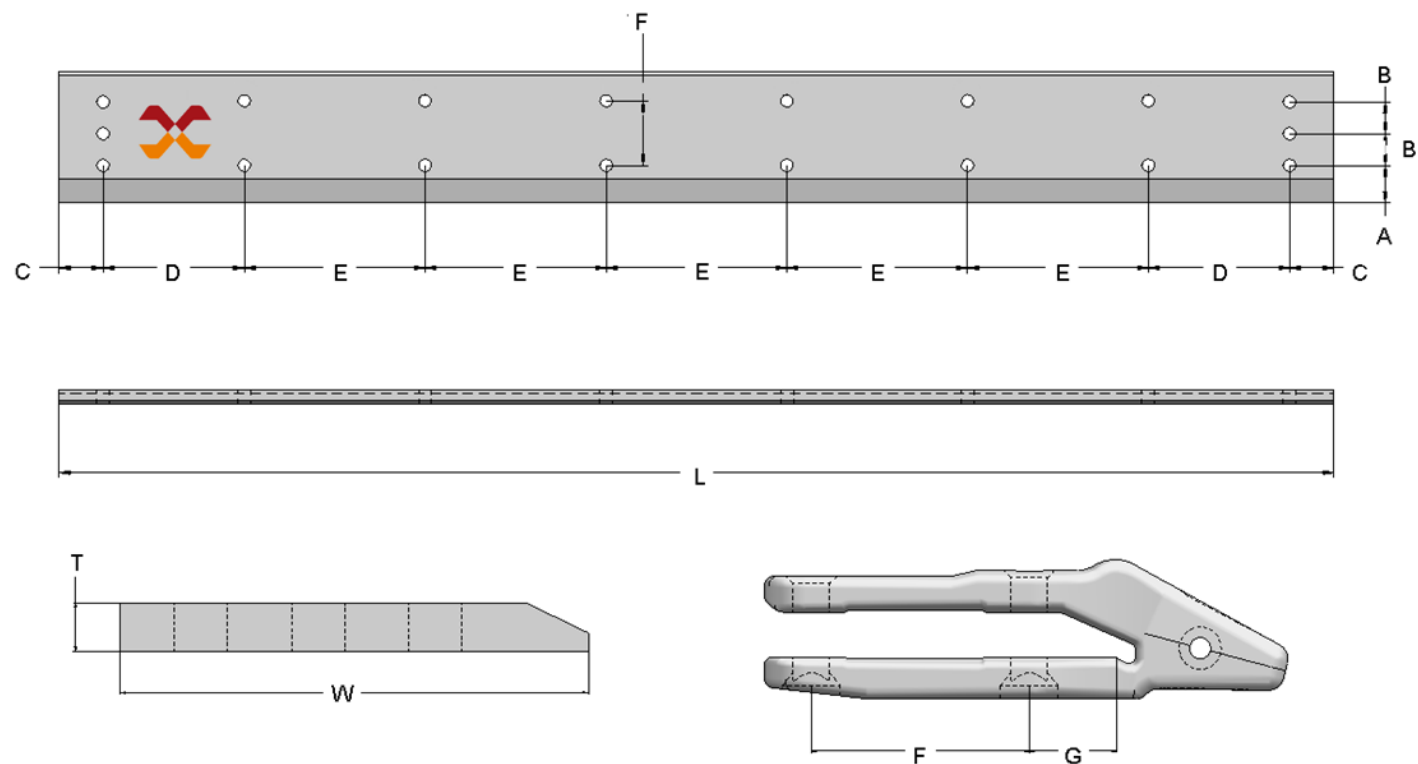


5V0600

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	F	150.0 mm.	5.90"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	G	101.6 mm.	4.00"
L	2602.0 mm.	102.50"	C	133.5 mm.	5.25"	Holes & Weight		Taladros y Peso
			D	247.5 mm.	9.74"	Qty	18	
			E	368.0 mm.	14.49"	Bolt	31.75 mm.	1-1/4"
						Weight	219.99 Kg	485.0 Lbs

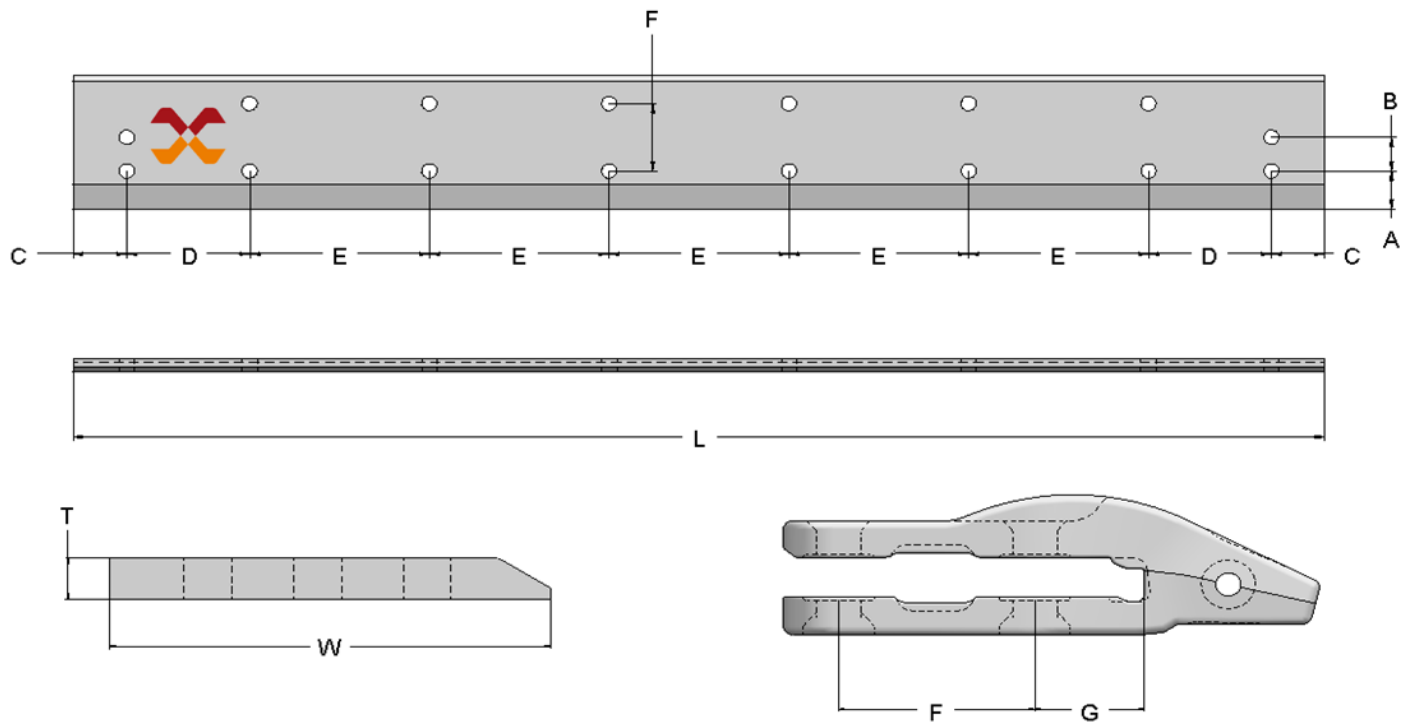

8V1825

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	F	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	G	70.0 mm.	2.75"
L	2639.0 mm.	103.90"	C	94.0 mm.	3.70"	Holes & Weight		Taladros y Peso
			D	288.0 mm.	11.33"	Qty	16	
			E	375.0 mm.	14.76"	Bolt	25.4 mm.	1"
						Weight	122.92 Kg	271.0 Lbs

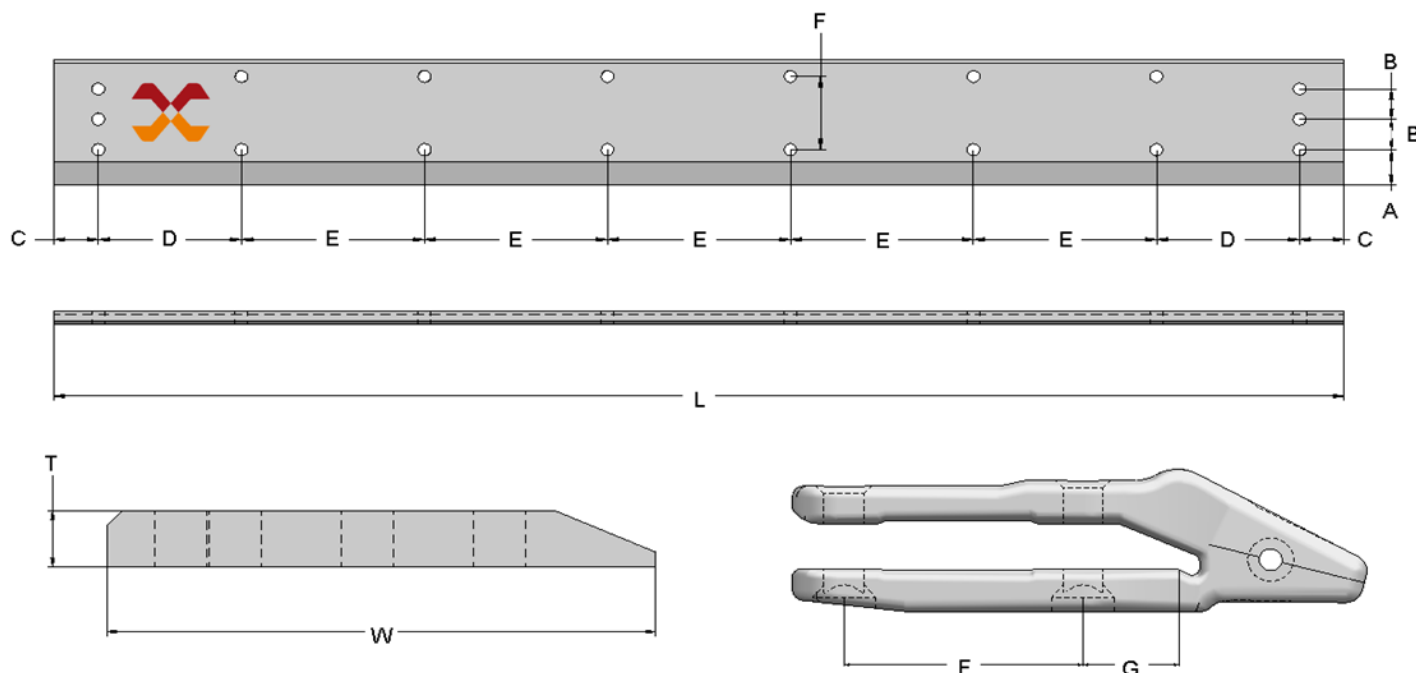


5V4696

Dimensions - Base Edge			Hole Spacing			Adapter		4T4307
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	32.0 mm.	1.25"	A	79.0 mm.	3.12"	F	165.0 mm.	6.50"
W	282.0 mm.	11.10"	B	68.0 mm.	2.67"	G	81.2 mm.	3.20"
L	2736.0 mm.	107.74"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	303.5 mm.	11.94"	Qty	18	
			E	388.0 mm.	15.27"	Bolt	25.4 mm.	1"
						Weight	177.35 Kg	391.0 Lbs

7V0898

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	F	150.0 mm.	5.90"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	G	101.6 mm.	4.00"
L	2805.0 mm.	110.40"	C	135.5 mm.	5.33"	Holes & Weight		Taladros y Peso
			D	267.0 mm.	10.51"	Qty	18	
			E	400.0 mm.	15.75"	Bolt	31.75 mm.	1-1/4"
						Weight	264.90 Kg	584.0 Lbs

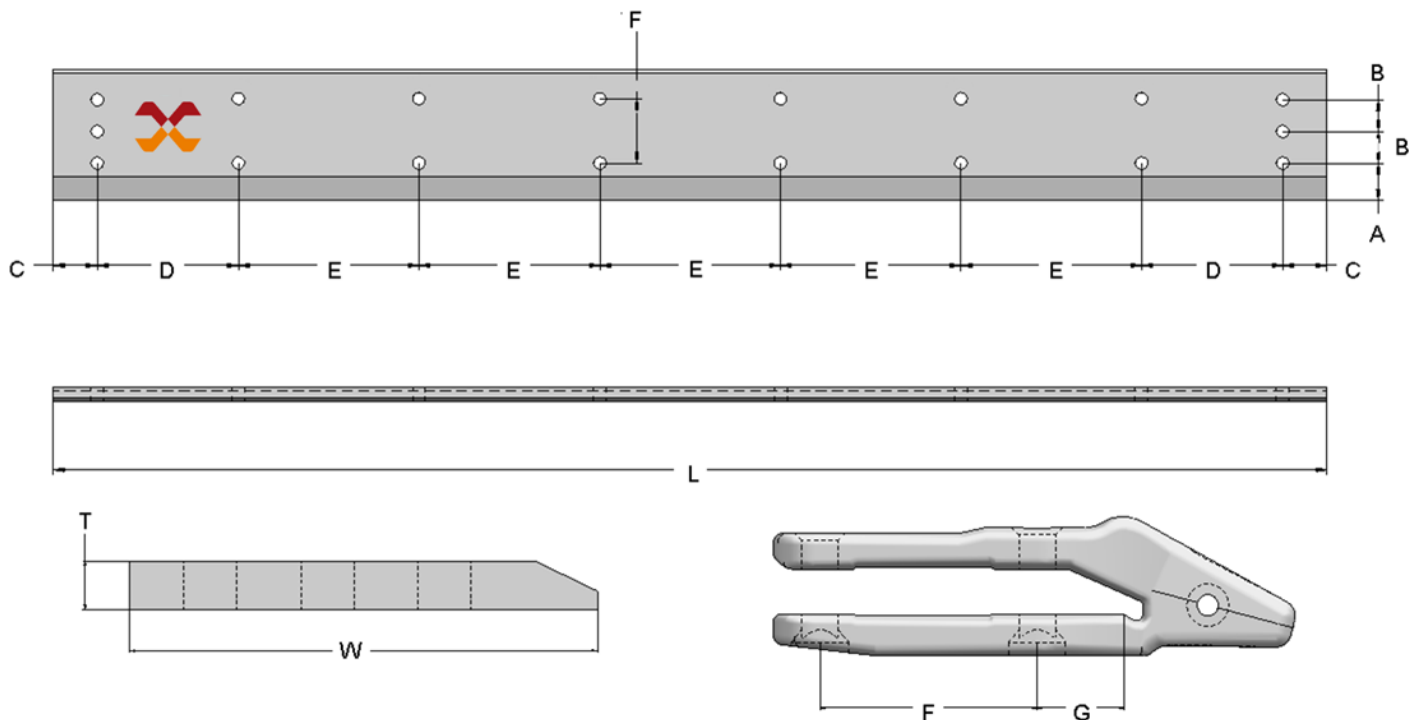


7V6844

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	F	150.0 mm.	5.90"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	G	101.6 mm.	4.00"
L	2912.0 mm.	114.72"	C	133.5 mm.	5.25"	Holes & Weight		Taladros y Peso
			D	292.5 mm.	11.51"	Qty	18	
			E	412.0 mm.	16.22"	Bolt	31.75 mm.	1-1/4"
						Weight	236.28 Kg	520.9 Lbs


7V1490

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	F	150.0 mm.	5.90"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	G	101.6 mm.	4.00"
L	3032.0 mm.	119.37"	C	133.5 mm.	5.25"	Holes & Weight		Taladros y Peso
			D	310.0 mm.	12.20"	Qty	18	
			E	429.0 mm.	16.88"	Bolt	31.75 mm.	1-1/4"
						Weight	245.44 Kg	541.1 Lbs

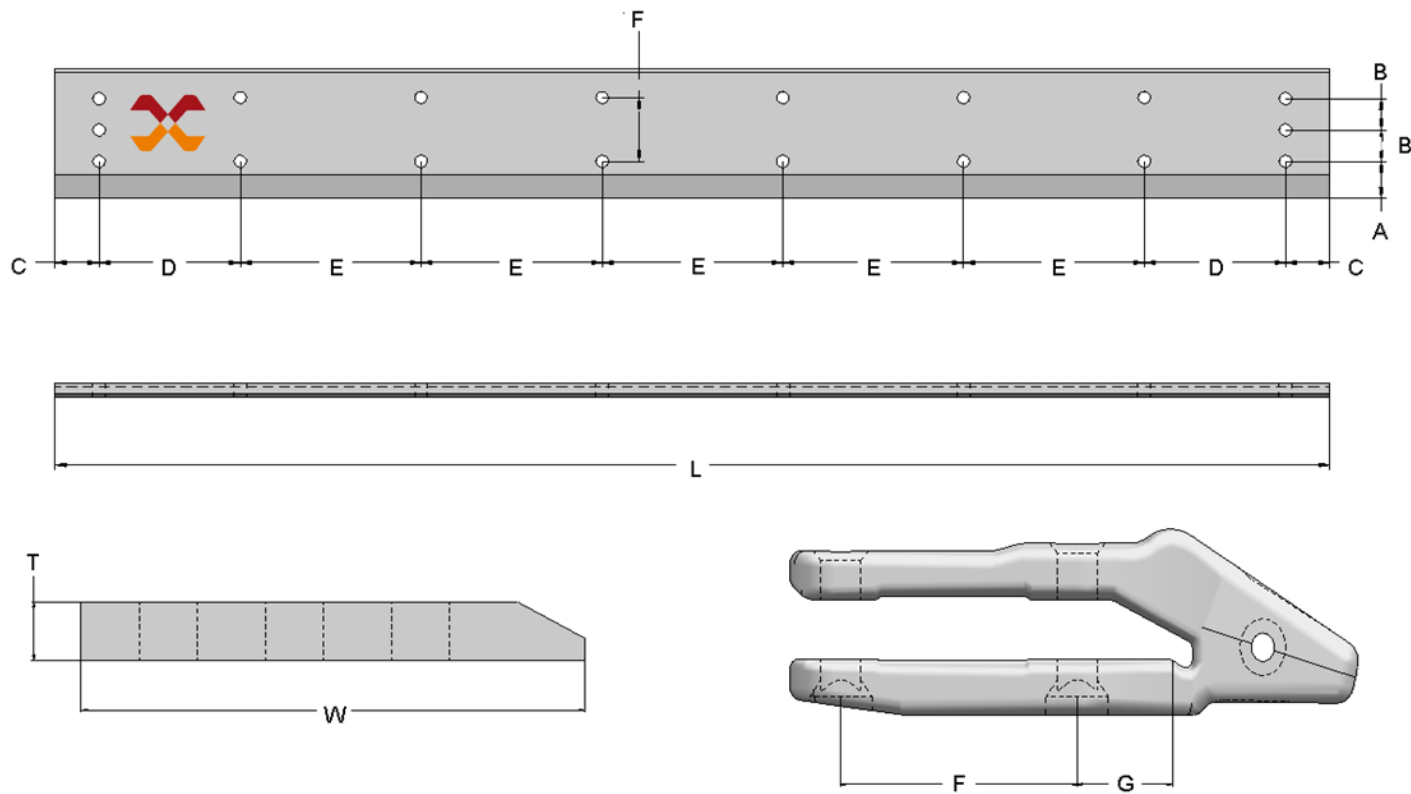

7V4188


Dimensions - Base Edge			Hole Spacing			Adapter		1U1357 6I9898	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	45.0 mm.	1.75"	A	102.0 mm.	4.01"	F	156.0 mm.	6.14"	
W	305.0 mm.	12.00"	B	79.0 mm.	3.12"	G	104.0 mm.	4.09"	
L	3315.0 mm.	130.50"	C	154.5 mm.	6.08"	Holes & Weight		Taladros y Peso	
			D	328.0 mm.	12.91"	Qty	18		
			E	470.0 mm.	11.93"	Bolt	31.75 mm.		1-1/4"
						Weight	325.86 Kg		718.40 Lbs

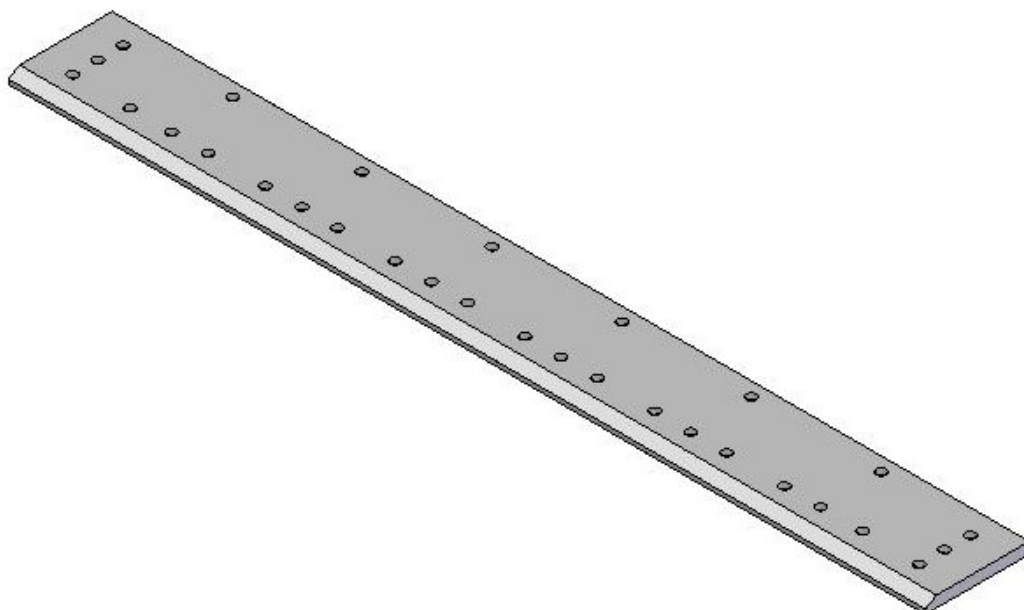

Bucket Base Edges - With Segment Holes.

Cuchilla Base Cucharón - Con taladros de Segmentos.


Reference	Thick - Grueso		Width - Ancho		Length - Largo		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	
6W2977	25.4 mm	1.00"	245.0 mm	9.65"	2018.0 mm	79.50"	22
9V6571	25.4 mm	1.00"	245.0 mm	9.65"	2078.0 mm	81.80"	22
9V6570	25.4 mm	1.00"	245.0 mm	9.65"	2202.0 mm	86.70"	23
5G6133	19.0 mm	0.75"	191.0 mm	7.51"	2150.0 mm	84.64"	24
6W2978	32.0 mm	1.25"	282.0 mm	11.10"	2237.0 mm	88.12"	25
6W2976	25.4 mm	1.00"	245.0 mm	9.65"	2248.0 mm	88.50"	26
6W2979	32.0 mm	1.25"	282.0 mm	11.10"	2268.0 mm	89.30"	27
6W2975	25.4 mm	1.00"	245.0 mm	9.65"	2324.0 mm	91.50"	28
5G8342	19.0 mm	0.75"	190.5 mm	7.50"	2367.0 mm	93.19"	29
9V6572	25.4 mm	1.00"	245.0 mm	9.65"	2370.0 mm	93.30"	30
6W2984	25.4 mm	1.00"	245.0 mm	9.65"	2408.0 mm	94.80"	31
6W2986	25.4 mm	1.00"	245.0 mm	9.65"	2411.0 mm	95.00"	32
6W2983	38.0 mm	1.50"	300.0 mm	11.81"	2432.0 mm	95.75"	33
6W2980	32.0 mm	1.25"	282.0 mm	11.10"	2474.0 mm	97.40"	33
4E0659	25.4 mm	1.00"	245.0 mm	9.65"	2524.0 mm	99.35"	34
6W2982	38.0 mm	1.50"	300.0 mm	11.81"	2602.0 mm	102.50"	35

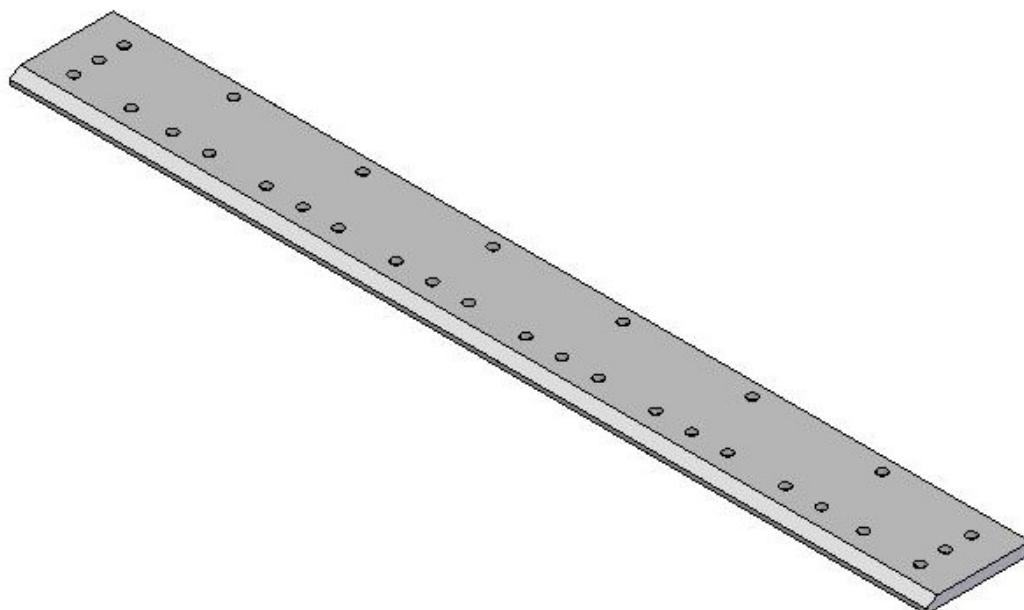

Bucket Base Edges - With Segment Holes.

Cuchilla Base Cucharón - Con taladros de Segmentos.

Reference	Thick - Grueso		Width - Ancho		Length - Largo		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	
6W2987	25.4 mm	1.00"	245.0 mm	9.65"	2615.0 mm	102.90"	36
6W2985	25.4 mm	1.00"	245.0 mm	9.65"	2639.0 mm	103.90"	37
6W2988	25.4 mm	1.00"	245.0 mm	9.65"	2640.0 mm	103.94"	38
105-2345	25.4 mm	1.00"	245.0 mm	9.65"	2681.0 mm	105.55"	39
110-4712	25.4 mm	1.00"	245.0 mm	9.65"	2723.0 mm	107.20"	39
9V6573	32.0 mm	1.25"	282.0 mm	11.10"	2736.0 mm	107.74"	40
6W2989	32.0 mm	1.25"	282.0 mm	11.10"	2840.0 mm	111.82"	40
6W2981	38.0 mm	1.50"	300.0 mm	11.81"	2846.0 mm	112.0"	41
6W2990	32.0 mm	1.25"	282.0 mm	11.10"	2856.0 mm	112.40"	41
141-4847	32.0 mm	1.25"	282.0 mm	11.10"	2888.0 mm	113.70"	42
7I3631	38.0 mm.	1.50"	300.0 mm	11.81"	2925.0 mm	115.16"	42
9V6575	38.0 mm	1.50"	300.0 mm	11.81"	3032.0 mm	119.37"	43
6W2991	45.0 mm	1.75"	305.0 mm	12.00"	3179.0 mm	125.12"	43
7I3015	38.0 mm	1.50"	300.0 mm	11.81"	3194.0 mm	125.75"	44
9V6574	45.0 mm	1.75"	305.0 mm	12.00"	3315.0 mm	130.50"	44
111-9770	45.0 mm	1.75"	305.0 mm	12.00"	3405.0 mm	134.06"	45
4E6085	45.0 mm	1.75"	305.0 mm	12.00"	3561.0 mm	140.16"	45

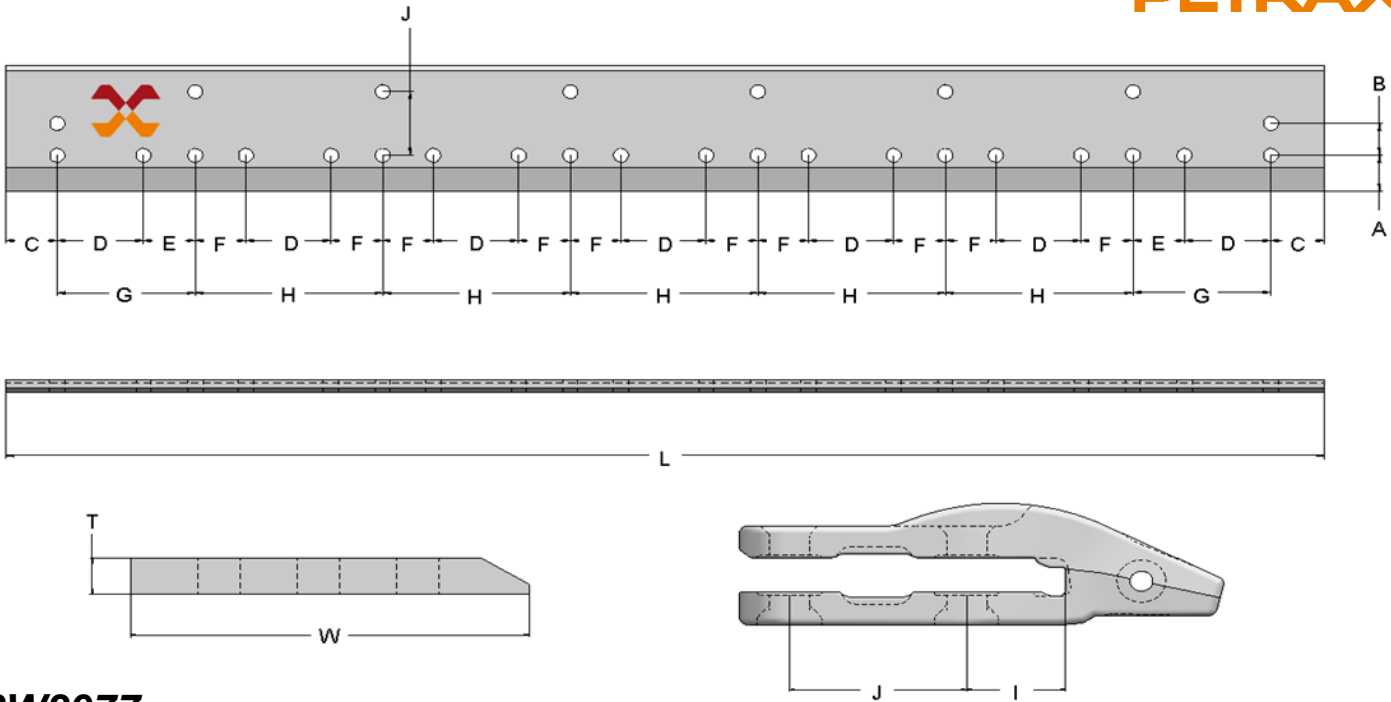


6W2977

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"	
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	J	124.0 mm.	4.88"	
L	2018.0 mm.	79.50"	C	94.7 mm.	3.72"	Holes & Weight		Taladros y Peso	
			D	105.0 mm.	4.13"	Qty	28		
			E	95.5 mm.	3.75"	Bolt	25.4 mm.	1"	
			F	90.2 mm.	3.55"	Weight	94.35 Kg	208.0 Lbs	
			G	200.5 mm.	7.89"				
			H	285.5 mm.	11.24"				


9V6571

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	J	124.0 mm.	4.88"
L	2078.0 mm.	81.80"	C	94.0 mm.	3.70"	Holes & Weight		Taladros y Peso
			D	105.0 mm.	4.13"	Qty	28	
			E	102.5 mm.	4.03"	Bolt	25.4 mm. 1"	
			F	95.0 mm.	3.74"	Weight	98.43 Kg 217.0 Lbs	
			G	207.5 mm.	8.16"			
			H	295.0 mm.	11.62"			

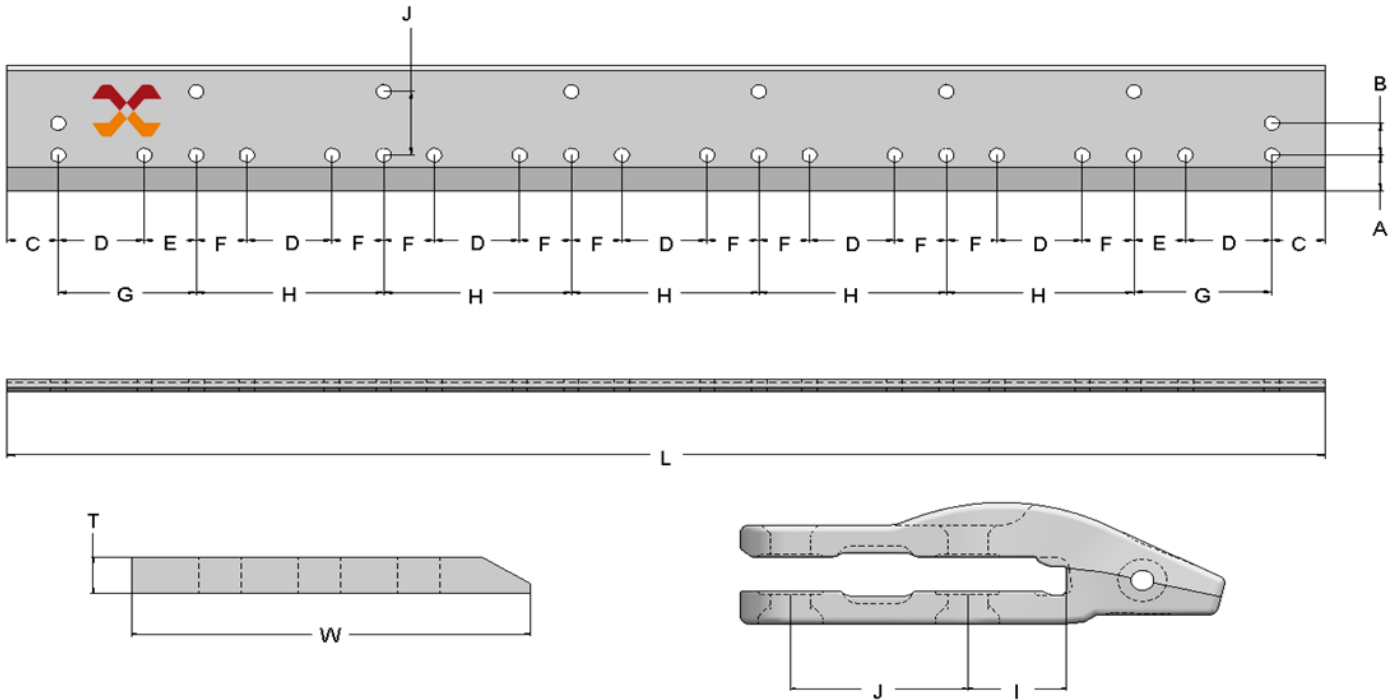

9V6570


Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"
W	245.0 mm.	9.65"	B	62.0mm.	2.44"	J	124.0 mm.	4.88"
L	2202.0 mm.	86.70"	C	94.0 mm.	3.70"	Holes & Weight		Taladros y Peso
			D	125.4 mm.	4.92"	Qty	28	
			E	91.5 mm.	3.60"	Bolt	25.4 mm.	1"
			F	95.3 mm.	3.75"	Weight	94.80 Kg	209.0 Lbs
			G	217.0 mm.	8.54"			
			H	316.0 mm.	12.44"			

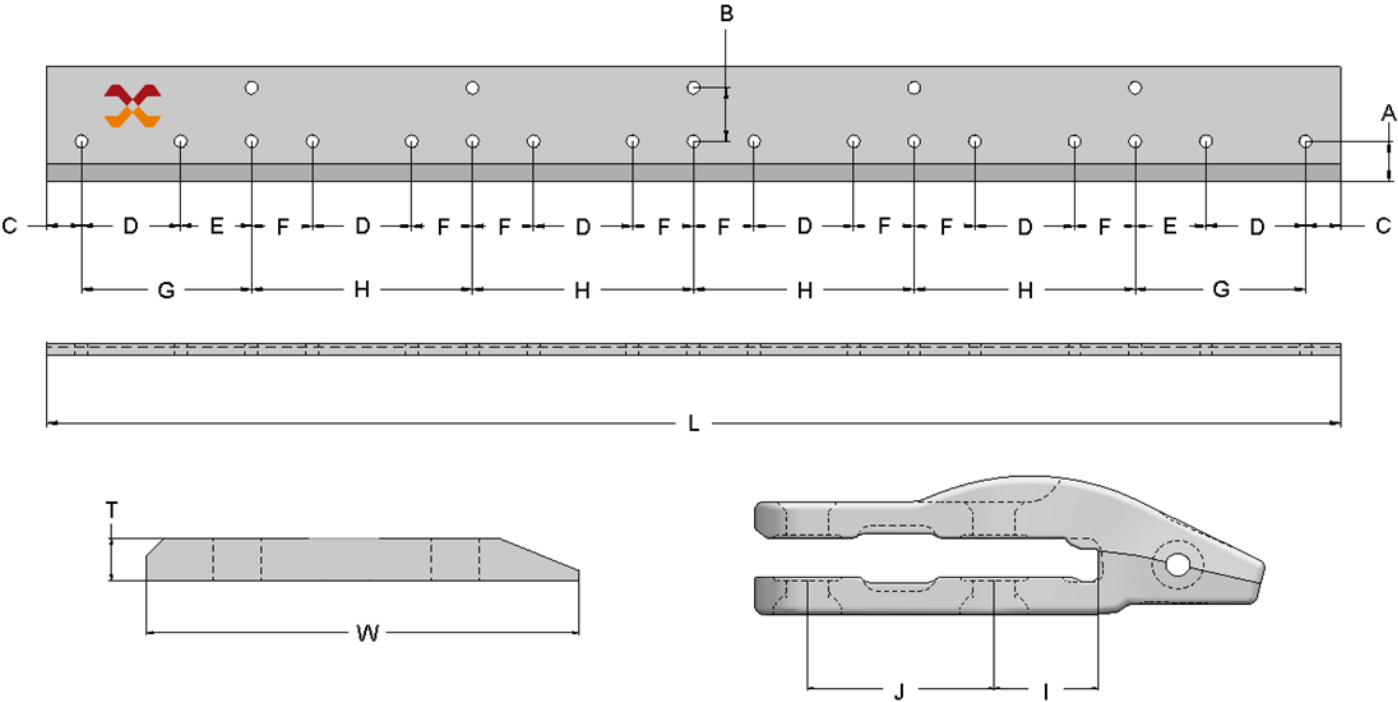

5G6133


9J4207

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	19.05 mm.	0.75"	A	67.0 mm.	2.63"	I	67.0	2.62"
W	191.0 mm.	7.51"	B	89.0 mm.	3.50"	J	89.0	3.50"
L	2150.0 mm.	84.64"	C	59.1 mm.	2.32"	Holes & Weight		Taladros y Peso
			D	165.0 mm.	6.50"	Qty	22	
			E	117.5 mm.	4.62"	Bolt	19.00 mm.	0.75"(3/4")
			F	100.8 mm.	3.97"	Weight	56.25 Kg	124.0 Lbs
			G	282.5 mm.	11.14"			
			H	366.7 mm.	14.43"			

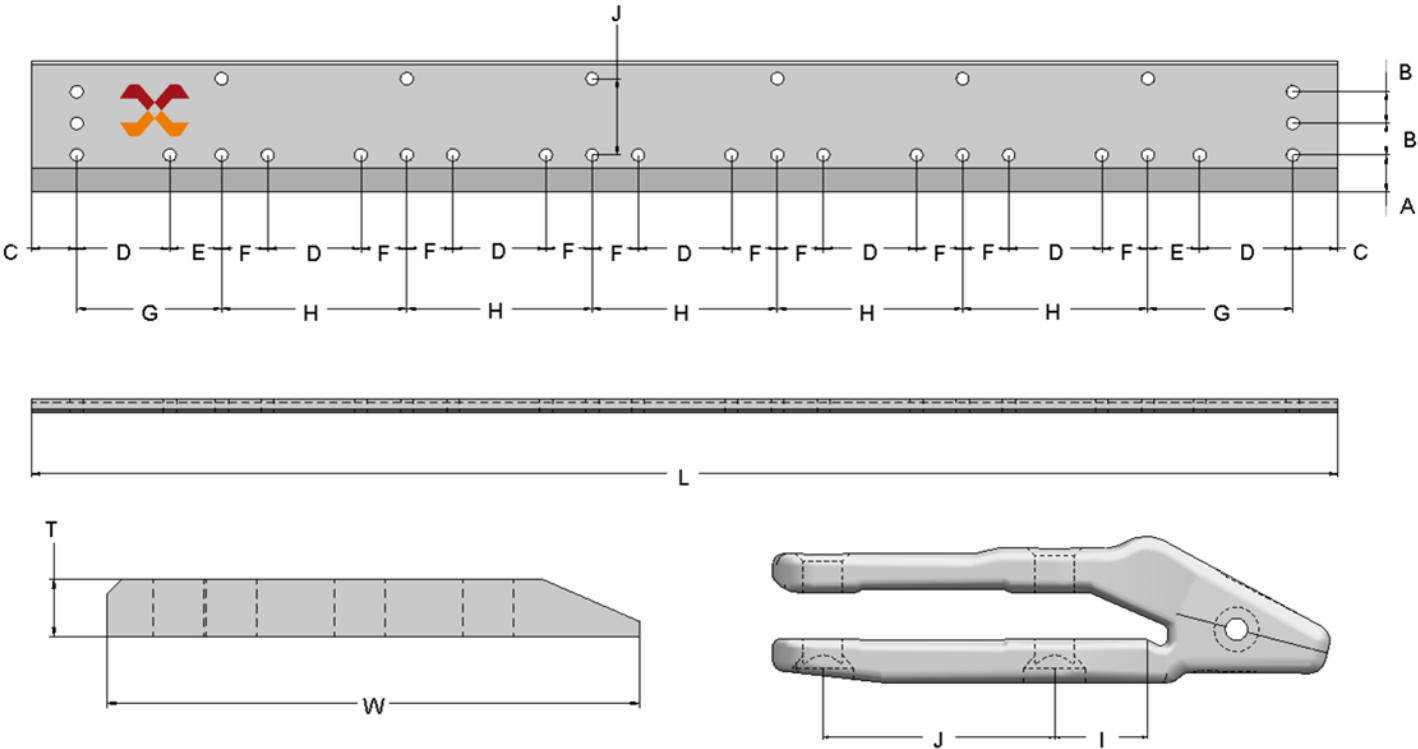


6W2978

Dimensions - Base Edge			Hole Spacing			Adapter		4T4307
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	32.0 mm.	1.25"	A	79.0 mm.	3.12"	I	81.2 mm.	3.20"
W	282.0 mm..	11.10"	B	68.0 m.	2.67"	J	165.0 mm.	6.50"
L	2237.0 mm.	88.12"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	125.0 mm.	4.92"	Qty	30	
			E	94.0 mm.	3.70"	Bolt	25.4 mm.	1"
			F	98.5 mm.	3.87"	Weight	144.24 Kg	318.0 Lbs
			G	219.0 mm.	8.62"			
			H	322.0 mm.	2.68"			

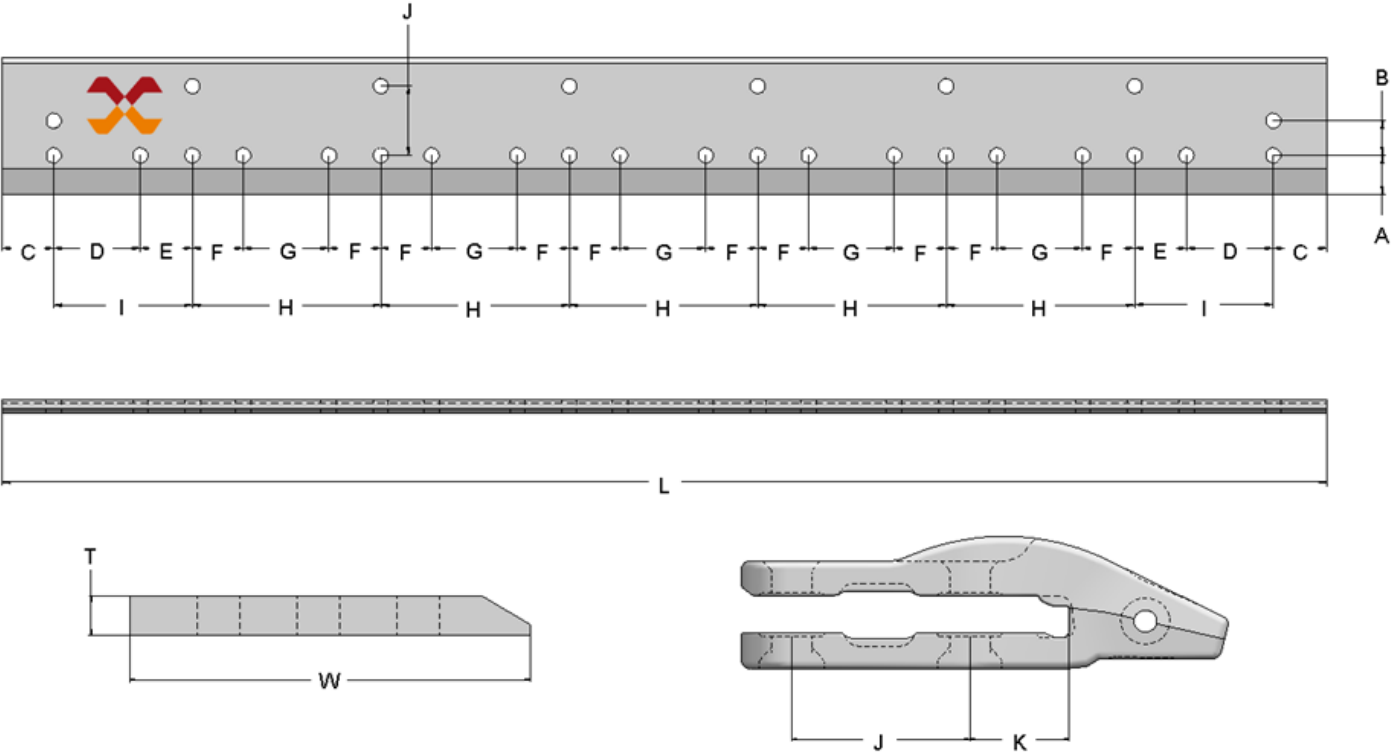


6W2976

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	J	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	K	70.0 mm.	2.75"
L	2248 mm.	88.50"	C	98.5 mm.	3.87"	Holes & Weight		Taladros y Peso
			D	140.0 mm.	5.51"	Qty	28	
			E	95.5 mm.	3.75"	Bolt	25.4 mm.	1"
			F	95.5 mm.	3.75"	Weight	93.89 Kg	207.0 Lbs
			G	125.0 mm.	4.92"			
			H	316.0 mm.	12.44"			
			I	235.5 mm.	9.27"			

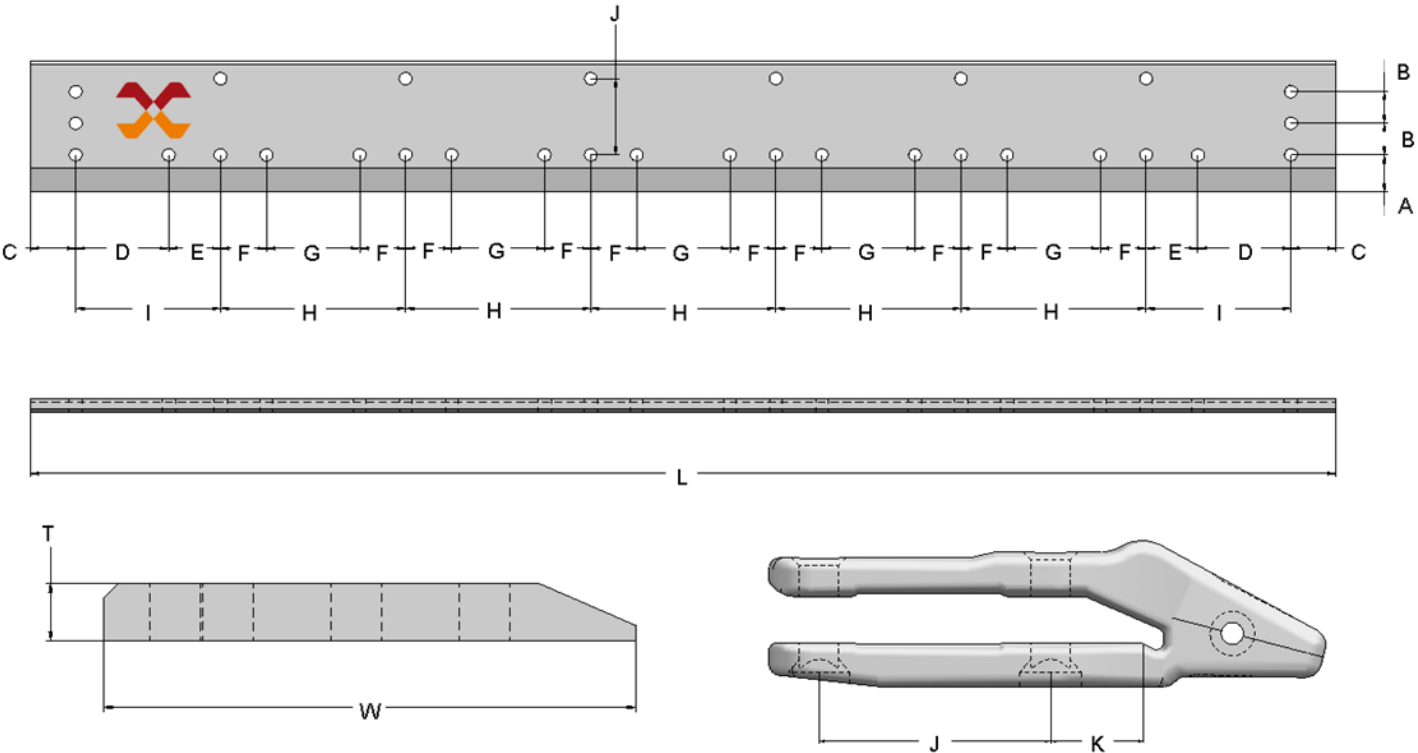


6W2979

Dimensions - Base Edge			Hole Spacing			Adapter		4T4307
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	32.0 mm.	1.25"	A	79.0 mm.	3.12"	J	165.0 mm.	6.50"
W	282.0 mm.	11.10"	B	68.0 mm.	2.67"	K	81.2 mm.	3.20"
L	2268.0 mm.	89.30"	C	93.5 mm.	3.68"	Holes & Weight		Taladros y Peso
			D	140.0 mm.	5.51"	Qty	30	
			E	95.5 mm.	3.75"	Bolt	25.4 mm.	1"
			F	98.5 mm.	3.87"	Weight	147.42 Kg	325.0 Lbs
			G	125.0 mm.	4.92"			
			H	322.0 mm.	2.68"			
			I	235.5 mm.	9.27"			

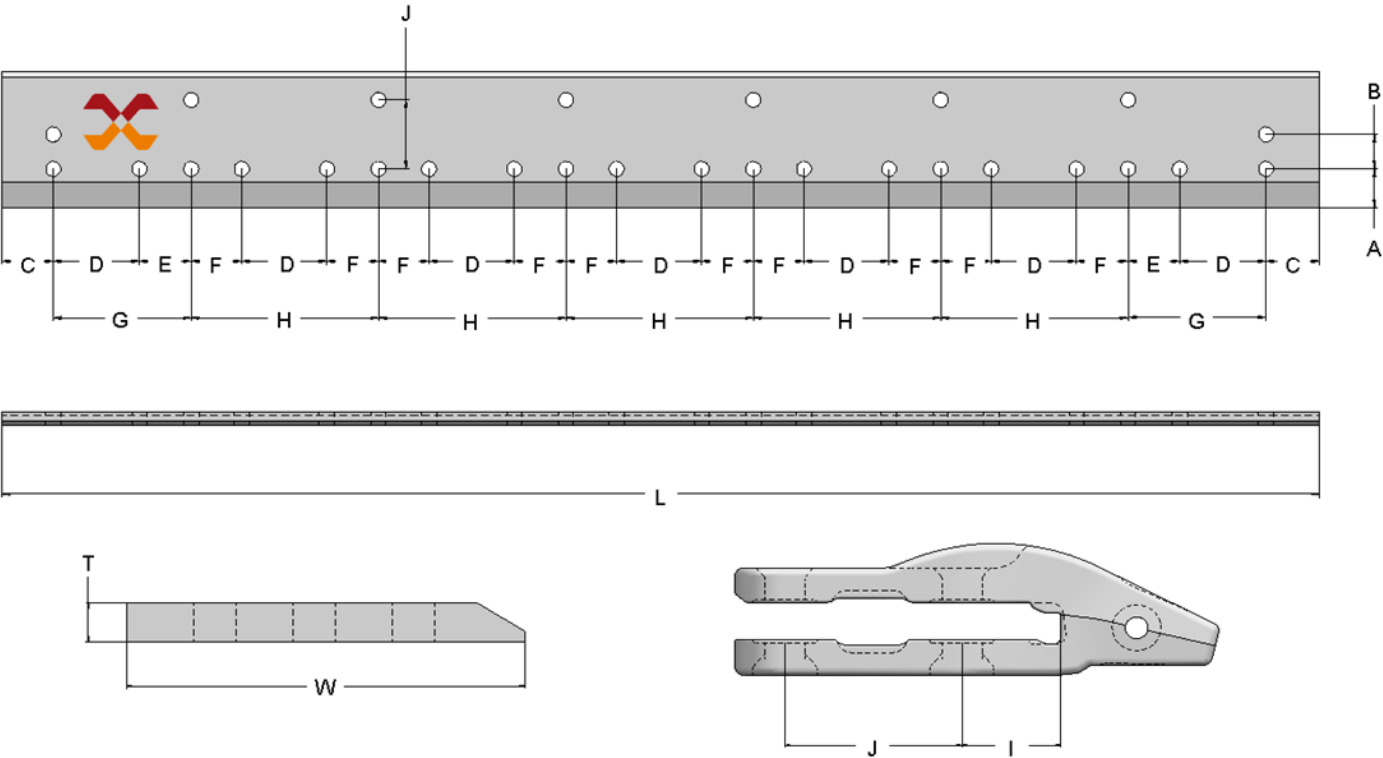

6W2975


Dimensions - Base Edge			Hole Spacing			Adapter		1U0257	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"	
W	245.0 mm.	9.65"	B	62.0mm.	2.44"	J	124.0 mm.	4.88"	
L	2324.0 mm.	91.50"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso	
			D	140.0 mm.	5.51"	Qty	28		
			E	102.5 mm.	4.03"	Bolt	25.4 mm.		1"
			F	95.0 mm.	3.74"	Weight	100.00 Kg		220.0 Lbs
			G	242.5 mm.	9.54"				
			H	330.0 mm.	12.99"				

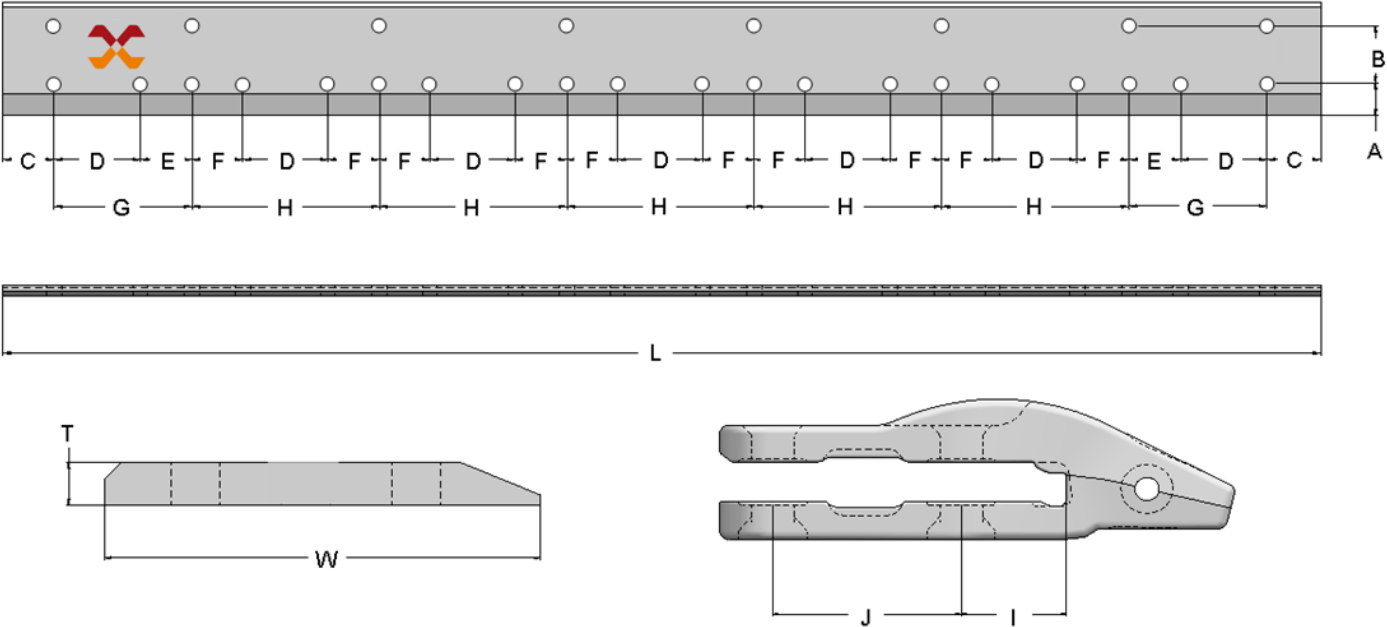

5G8342


9J4207

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	19.05 mm.	0.75"	A	67.0 mm.	2.63"	I	67.0 mm.	2.62"
W	190.5 mm.	7.50"	B	89.0 mm.	3.50"	J	89.0 mm.	3.50"
L	2367.0 mm.	93.19"	C	59.7 mm.	2.35"	Holes & Weight		Taladros y Peso
			D	165.0 mm.	6.50"	Qty	28	
			E	117.5 mm.	4.62"	Bolt	19.00 mm.	0.75"(3/4")
			F	85.7 mm.	3.37"	Weight	62.14 Kg	137.0 Lbs
			G	282.5 mm.	11.14"			
			H	336.5 mm.	13.18"			

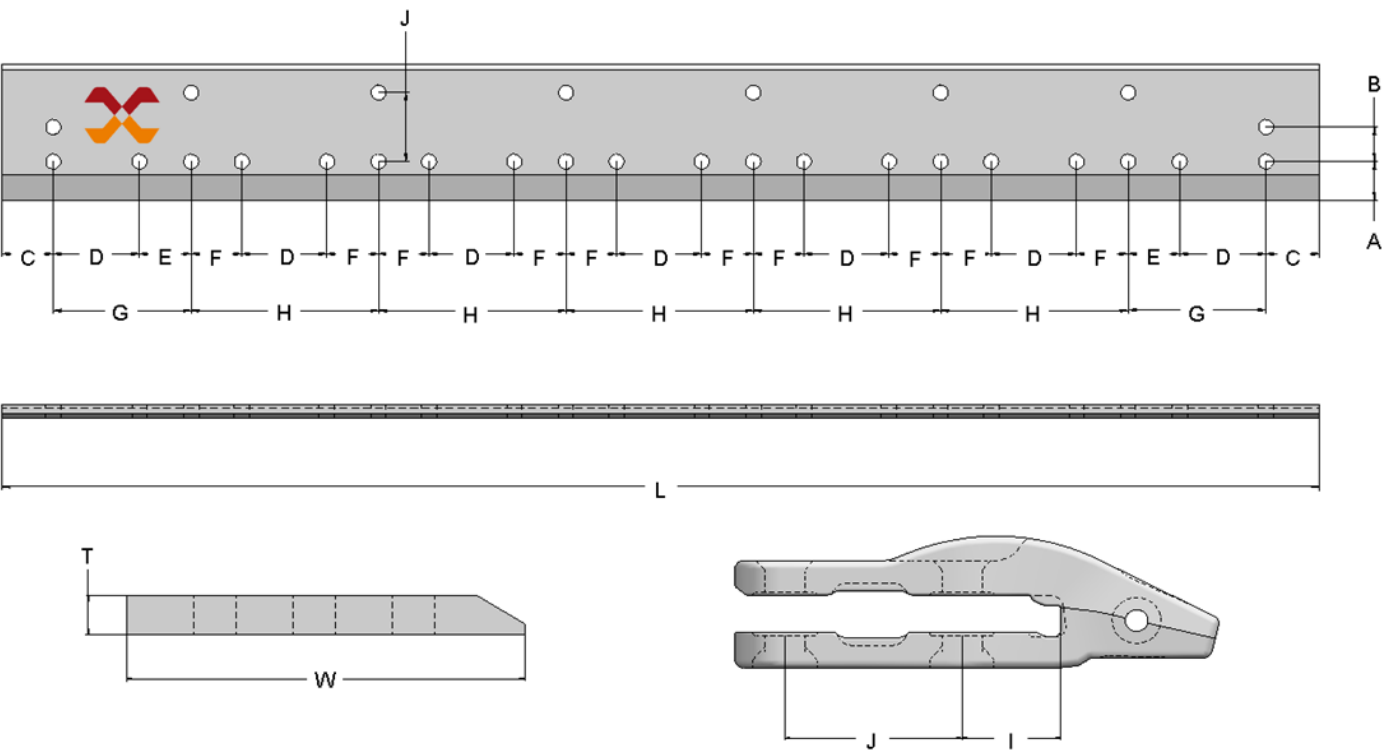

9V6572


Dimensions - Base Edge			Hole Spacing			Adapter		1U0257	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"	
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	J	124.0 mm.	4.88"	
L	2370.0 mm.	93.30"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso	
			D	155.0 mm.	6.10"	Qty	28		
			E	94.0 mm.	3.66"	Bolt	25.4 mm.	1"	
			F	90.7 mm.	3.57"	Weight	111.1 Kg	245.0 Lbs	
			G	249.0 mm.	9.80"				
			H	336.5 mm.	13.25"				

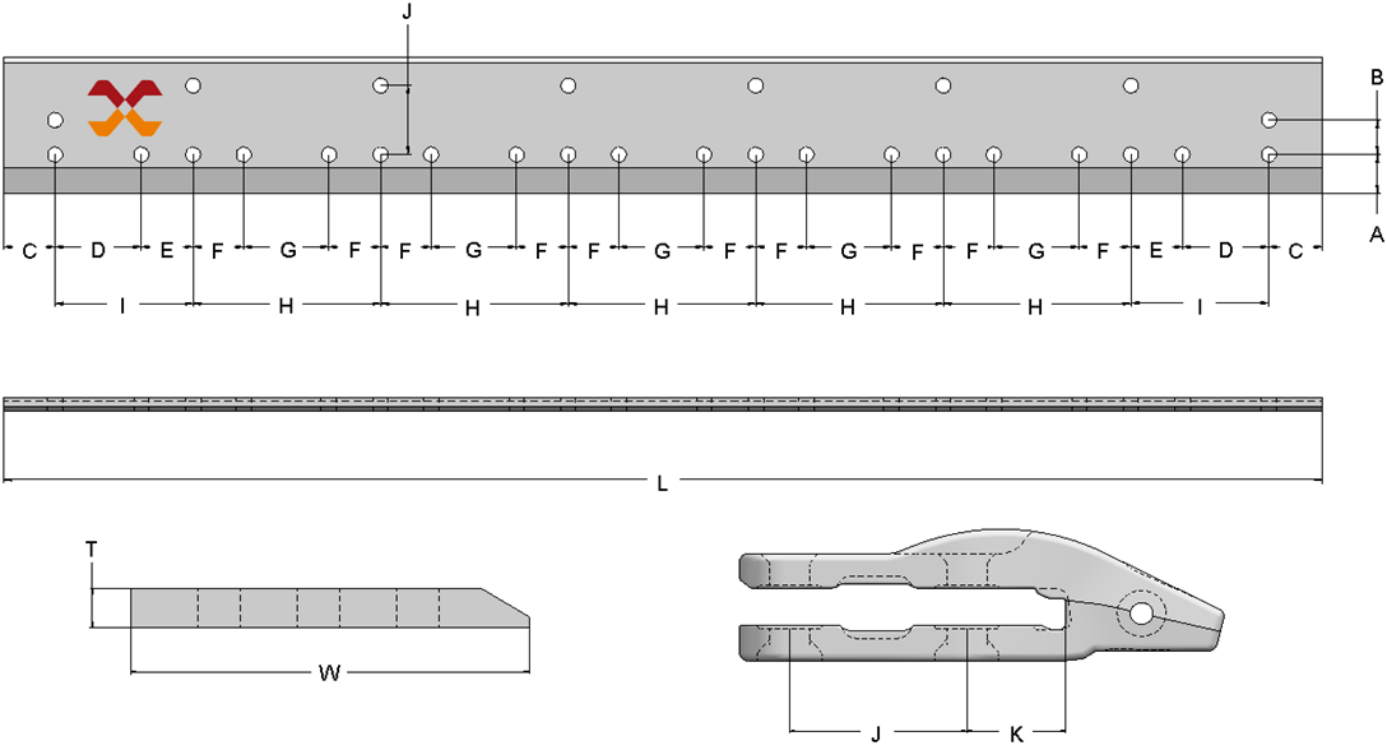

6W2984


1U0257

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	J	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	K	70.0 mm.	2.75"
L	2408.0 mm.	94.80"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	140.0 mm.	5.51"	Qty	28	
			E	94.5 mm.	3.72"	Bolt	25.4 mm.	1"
			F	97.5 mm.	3.83"	Weight	112.50 Kg	248.0 Lbs
			G	155.0 mm.	6.10"			
			H	350.0 mm.	13.77"			
			I	234.5 mm.	9.23"			

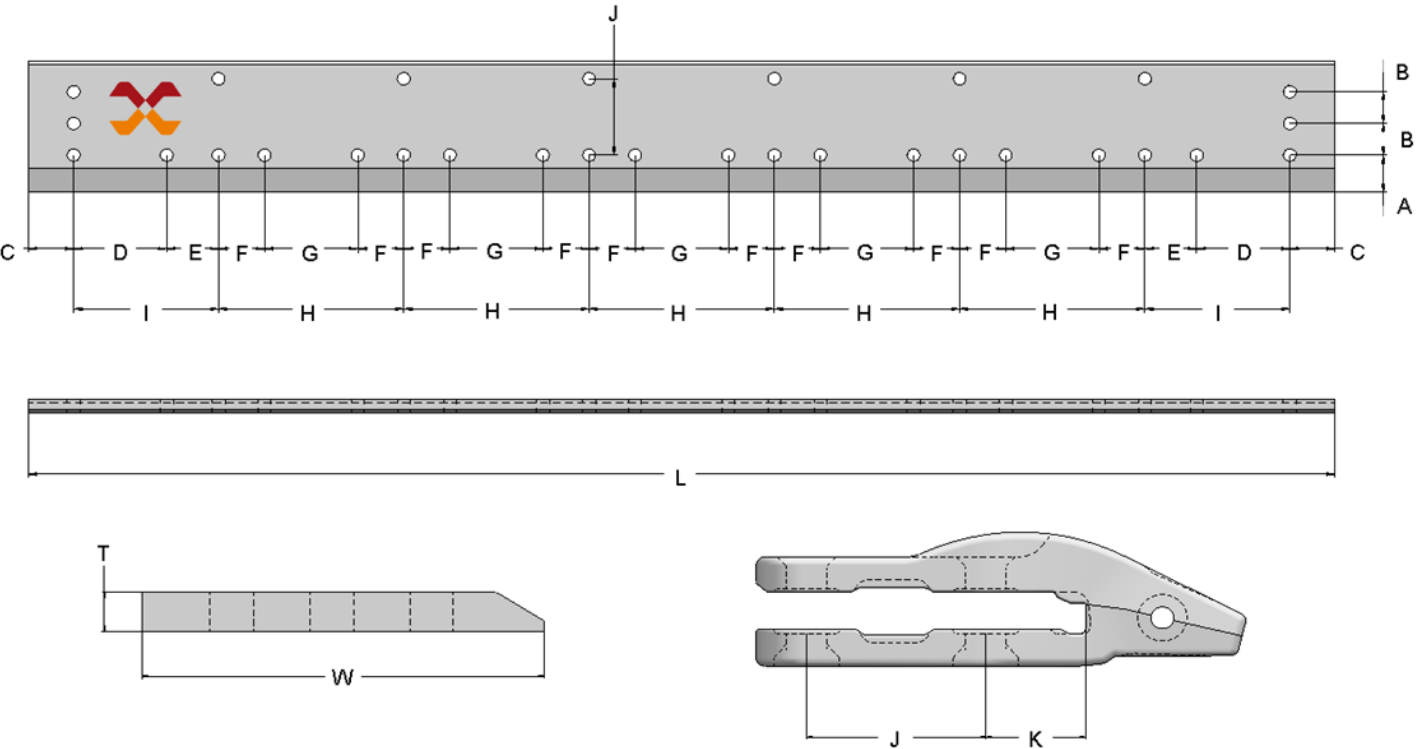

6W2986

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.67"	J	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	68.0 mm.	2.67"	K	70.0 mm.	2.75"
L	2411.0 mm.	95.00"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	140.0 mm.	5.51"	Qty	30	
			E	96.0 mm.	3.78"	Bolt	25.4 mm.	1"
			F	97.5 mm.	3.83"	Weight	110.22 Kg	243.0 Lbs
			G	155.0 mm.	6.10"			
			H	350.0 mm.	13.77"			
			I	236.0 mm.	9.29"			

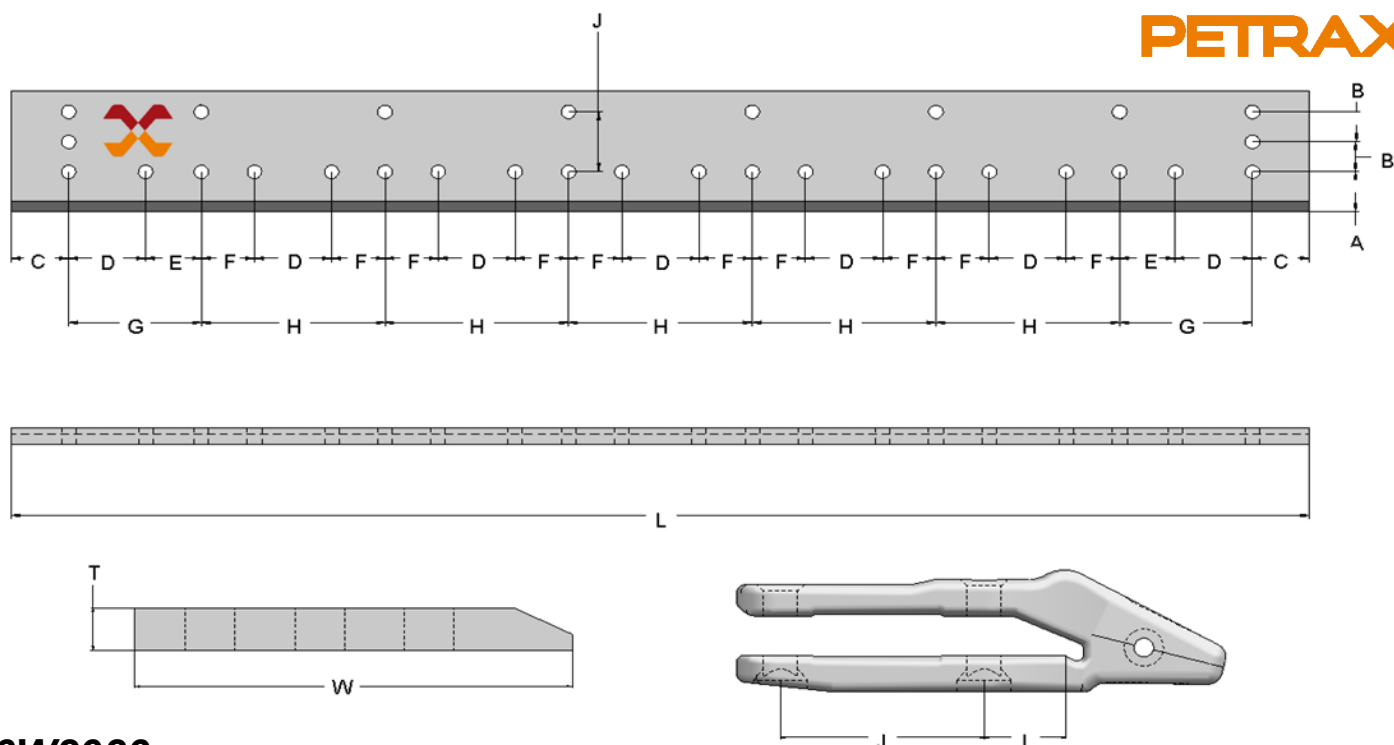


6W2983

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	I	101.6 mm.	4.00"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	J	150.0 mm.	5.90"
L	2432.0 mm.	95.75"	C	133.5 mm.	5.25"	Holes & Weight		Taladros y Peso
			D	90.0 mm.	3.54"	Qty	28	
			E	130.0 mm.	5.11"	Bolt	31.75 mm.	1-1/4"
			F	127.5 mm.	5.01"	Weight	200.49 Kg	442.0 Lbs
			G	220.0 mm.	8.66"			
			H	345.0 mm.	13.58"			


6W2980

Dimensions - Base Edge			Hole Spacing			Adapter		4T4307	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	32.0 mm.	1.25"	A	79.0 mm.	3.12"	I	81.2 mm.	3.20"	
W	282.0 mm.	11.10"	B	68.0 mm.	2.67"	J	165.0 mm.	6.50"	
L	2474.0 mm.	97.40"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso	
			D	155.0 mm.	6.10"	Qty	30		
			E	112.5 mm.	4.42"	Bolt	25.4 mm.	1"	
			F	97.5 mm.	3.83"	Weight	158.76 Kg	350.0 Lbs	
			G	267.5 mm.	10.53"				
			H	350.0 mm.	13.78"				

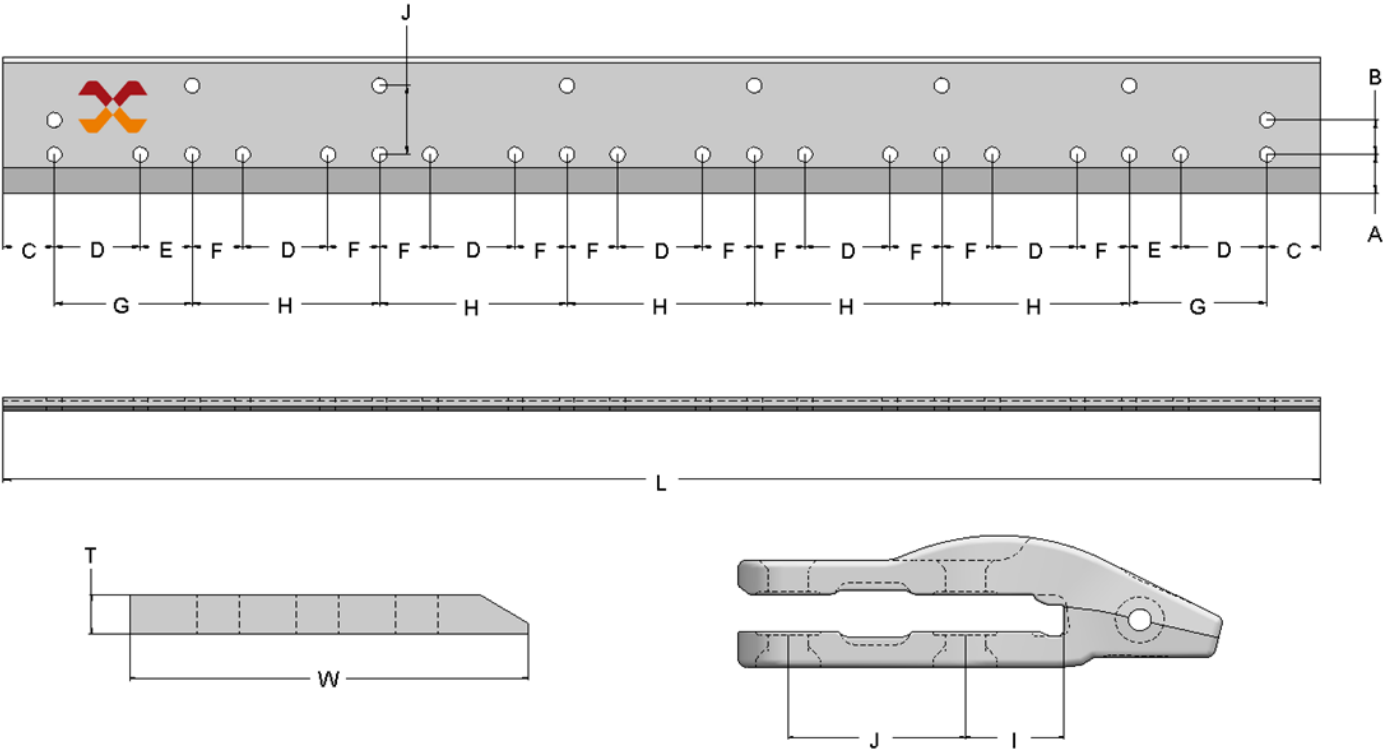


4E0659

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.67"	I	70.0 mm.	2.75"
W	245.0 mm.	9.65"	B	68.0 mm.	2.67"	J	124.0 mm.	4.88"
L	2524.0 mm.	99.35"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	140.0 mm.	5.51"	Qty	28	
			E	96.0 mm.	3.78"	Bolt	25.4 mm.	1"
			F	97.5 mm.	3.83"	Weight	113.9 Kg	251.0 Lbs
			G	155.0 mm.	6.10"			
			H	350.0 mm.	13.77"			

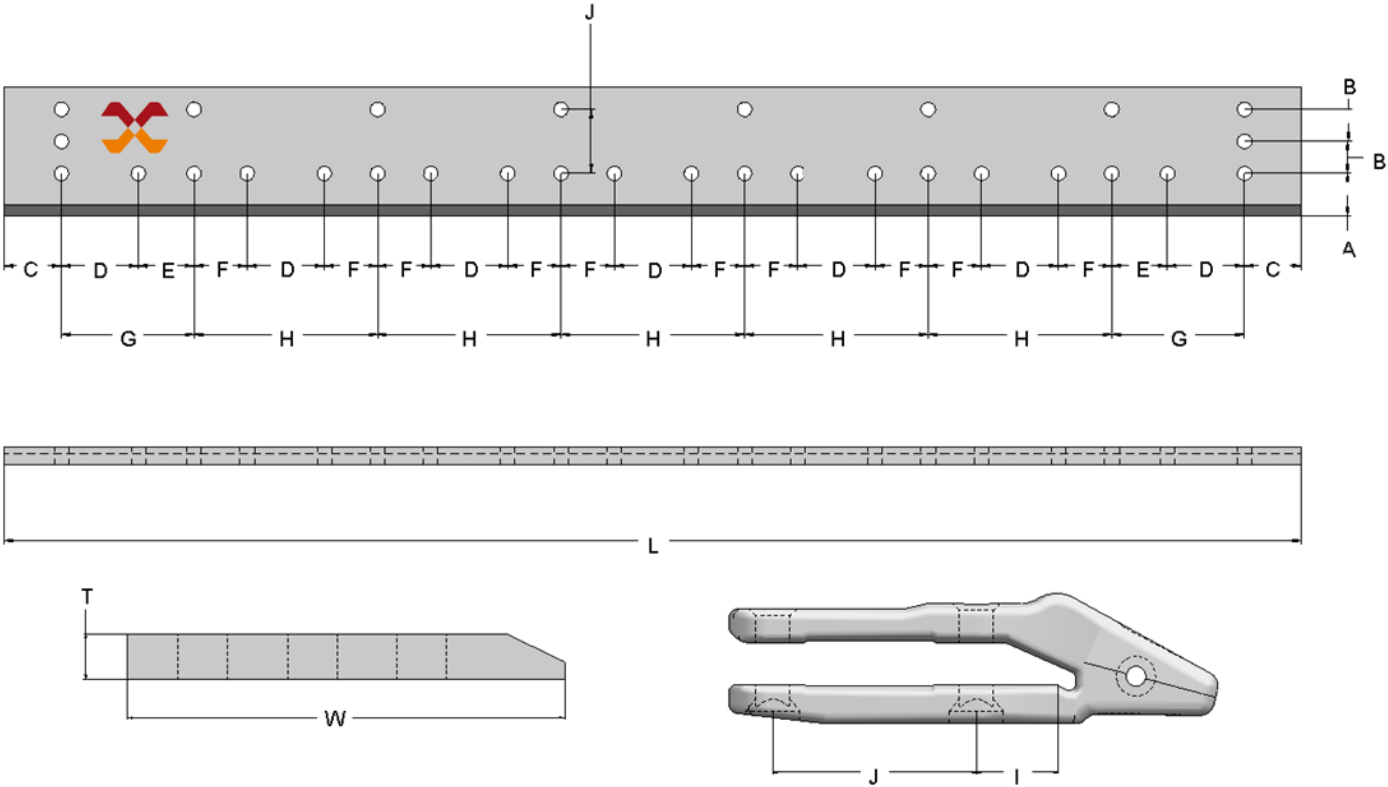


6W2982

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	I	101.6 mm.	4.00"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	J	150.0 mm.	5.90"
L	2602.0 mm.	102.50"	C	133.5 mm.	5.25"	Holes & Weight		Taladros y Peso
			D	120.0 mm.	4.72"	Qty	30	
			E	127.5 mm.	5.01"	Bolt	31.75 mm.	1-1/4"
			F	124.0 mm.	4.88"	Weight	219.99 Kg	485.0 Lbs
			G	247.5 mm.	9.74"			
			H	368.0 mm.	14.49"			

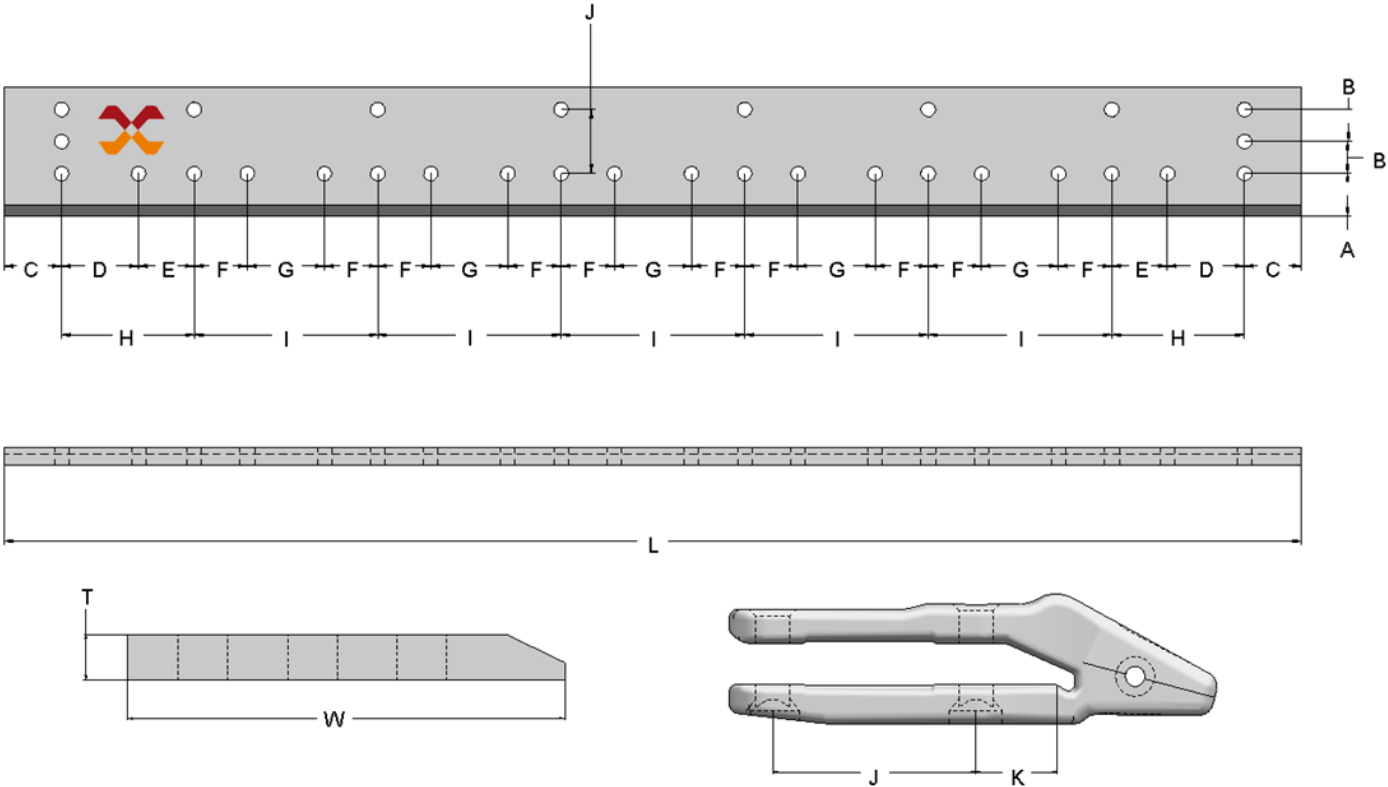


6W2987

Dimensions - Base Edge			Hole Spacing			Adapter		1U0307
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	J	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	68.0 mm.	2.67"	K	70.0 mm.	2.75"
L	2615.0 mm.	102.90"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	195.0 mm.	7.67"	Qty	30	
			E	93.0 mm.	3.66"	Bolt	25.4 mm.	1"
			F	107.5 mm.	4.23"	Weight	120.38 Kg	265.40 Lbs
			G	155.0 mm.	6.10"			
			H	288.0 mm.	11.33"			
			I	370.0 mm.	14.56"			

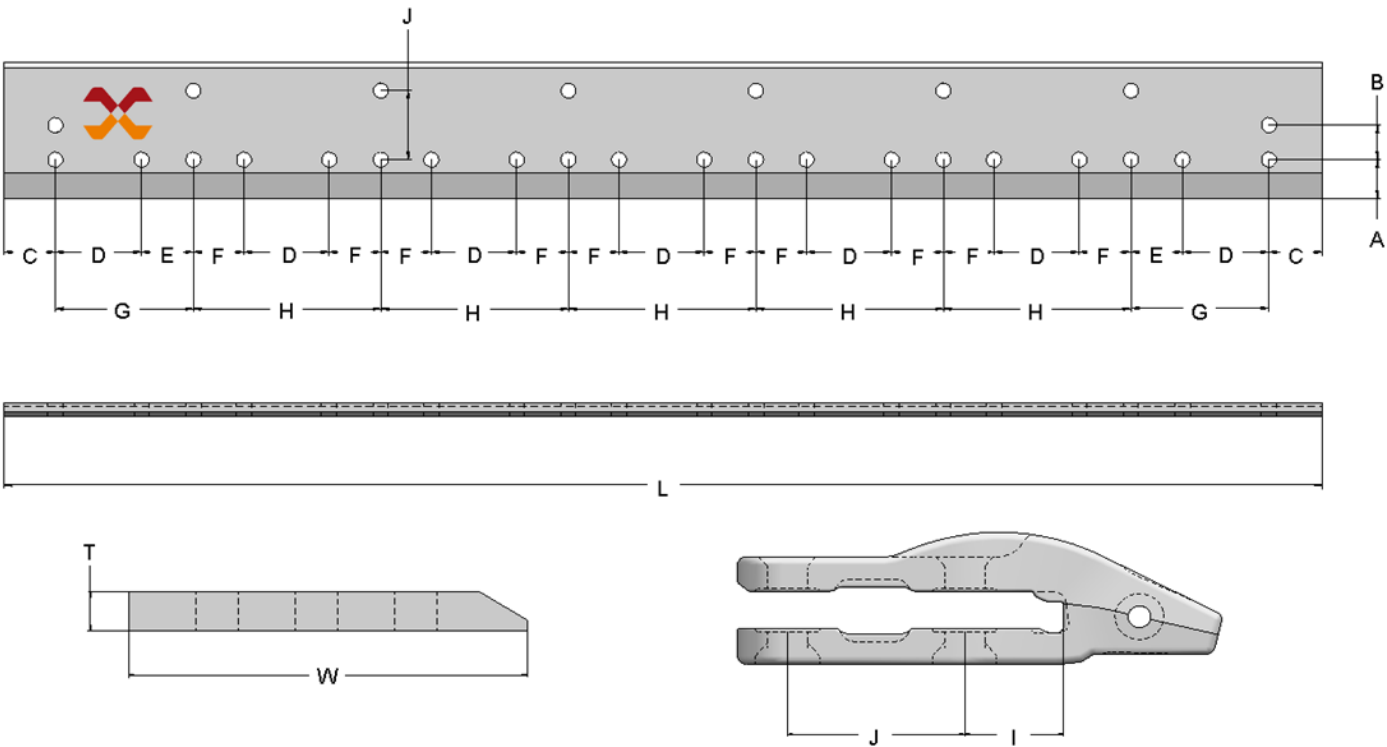

6W2985


Dimensions - Base Edge			Hole Spacing			Adapter		1U0257	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"	
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	J	124.0 mm.	4.88"	
L	2639.0 mm.	103.90"	C	94.0 mm.	3.70"	Holes & Weight		Taladros y Peso	
			D	195.0 mm.	7.68"	Qty	28		
			E	93.0 mm.	3.66"	Bolt	25.4 mm.	1"	
			F	90.0 mm.	3.54"	Weight	116.57 Kg	257.0 Lbs	
			G	288.0 mm.	11.33"				
			H	375.0 mm.	14.76"				

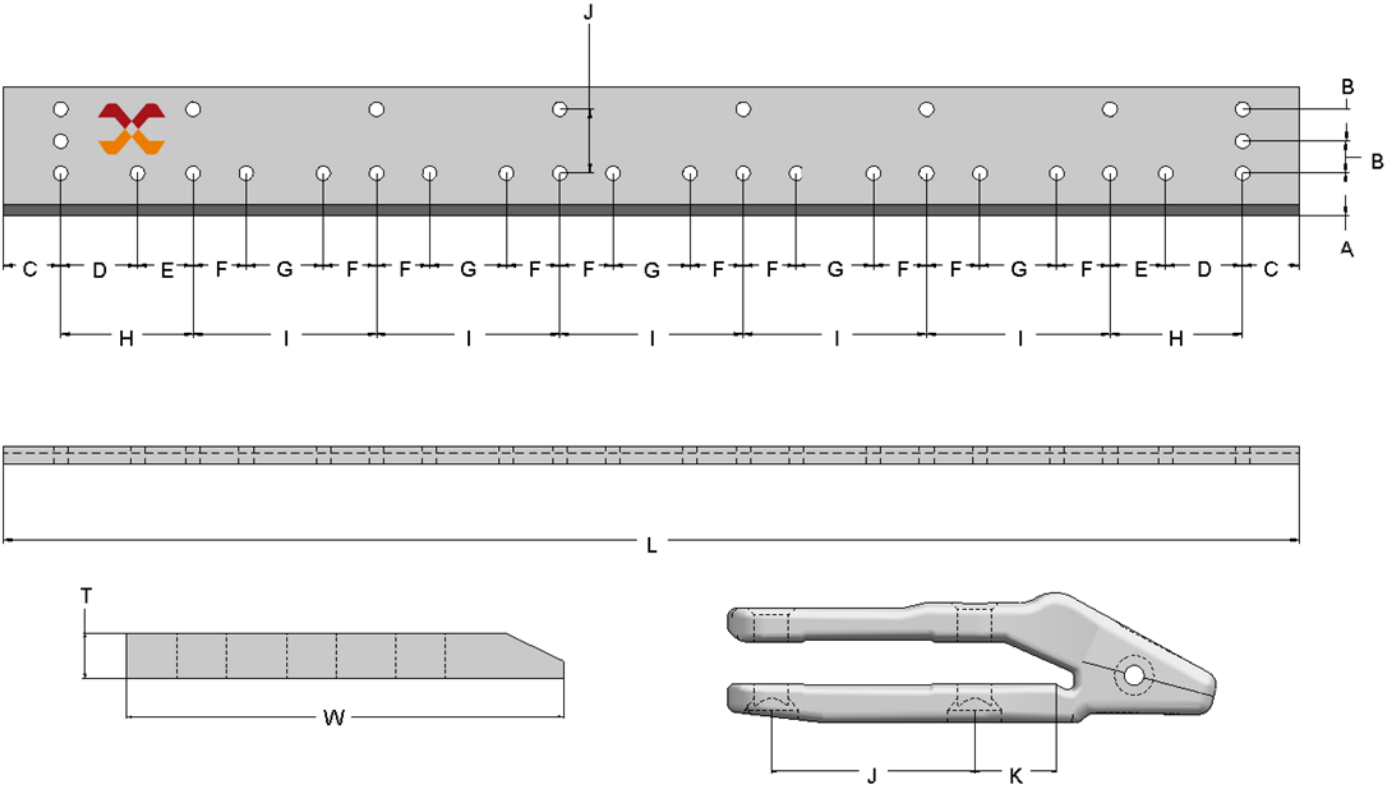

6W2988

1U0307

Dimensions - Base Edge			Hole Spacing			Adapter		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	J	124.0 mm.	4.88"
W	245.0 mm.	9.65"	B	68.0 mm.	2.67"	K	70.0 mm.	2.75"
L	2640.0 mm.	103.94"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso
			D	195.0 mm.	7.67"	Qty	30	
			E	95.5 mm.	3.75"	Bolt	25.4 mm.	1"
			F	109.5 mm.	4.31"	Weight	116.57 Kg	257.0 Lbs
			G	155.0 mm.	6.10"			
			H	290.5 mm.	11.43"			
			I	374.0 mm.	14.72"			

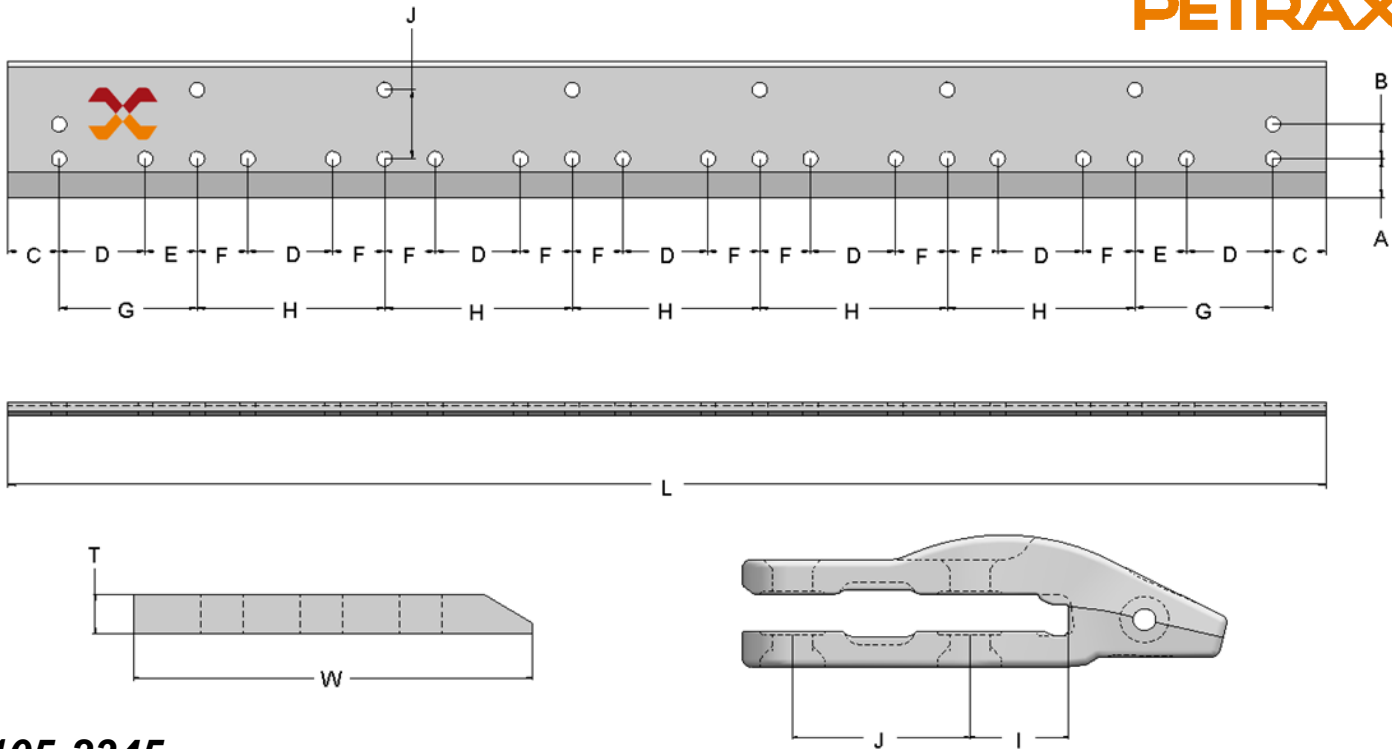


105-2345

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	J	124.0 mm.	4.88"
L	2681.0 mm.	105.55"	C	98.5 mm.	3.87"	Holes & Weight		Taladros y Peso
			D	195.0 mm.	7.68"	Qty	28	
			E	97.0 mm.	3.81"	Bolt	25.4 mm.	1"
			F	92.5 mm.	3.64"	Weight	116.17 Kg	256.1 Lbs
			G	292.0 mm.	11.50"			
			H	380.0 mm.	15.00"			

110-4712

Dimensions - Base Edge			Hole Spacing			Adapter		1U0257
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	25.4 mm.	1.00"	A	68.0 mm.	2.68"	I	70.0 mm.	2.75"
W	245.0 mm.	9.65"	B	62.0 mm.	2.44"	J	124.0 mm.	4.88"
L	2723.0 mm.	107.20"	C	97.0 mm.	3.81"	Holes & Weight		Taladros y Peso
			D	195.0 mm.	7.68"	Qty	28	
			E	97.0 mm.	3.81"	Bolt	25.4 mm.	1"
			F	97.0 mm.	3.81"	Weight	121.56 Kg	268.0 Lbs
			G	292.0 mm.	11.50"			
			H	389.0 mm.	15.31"			

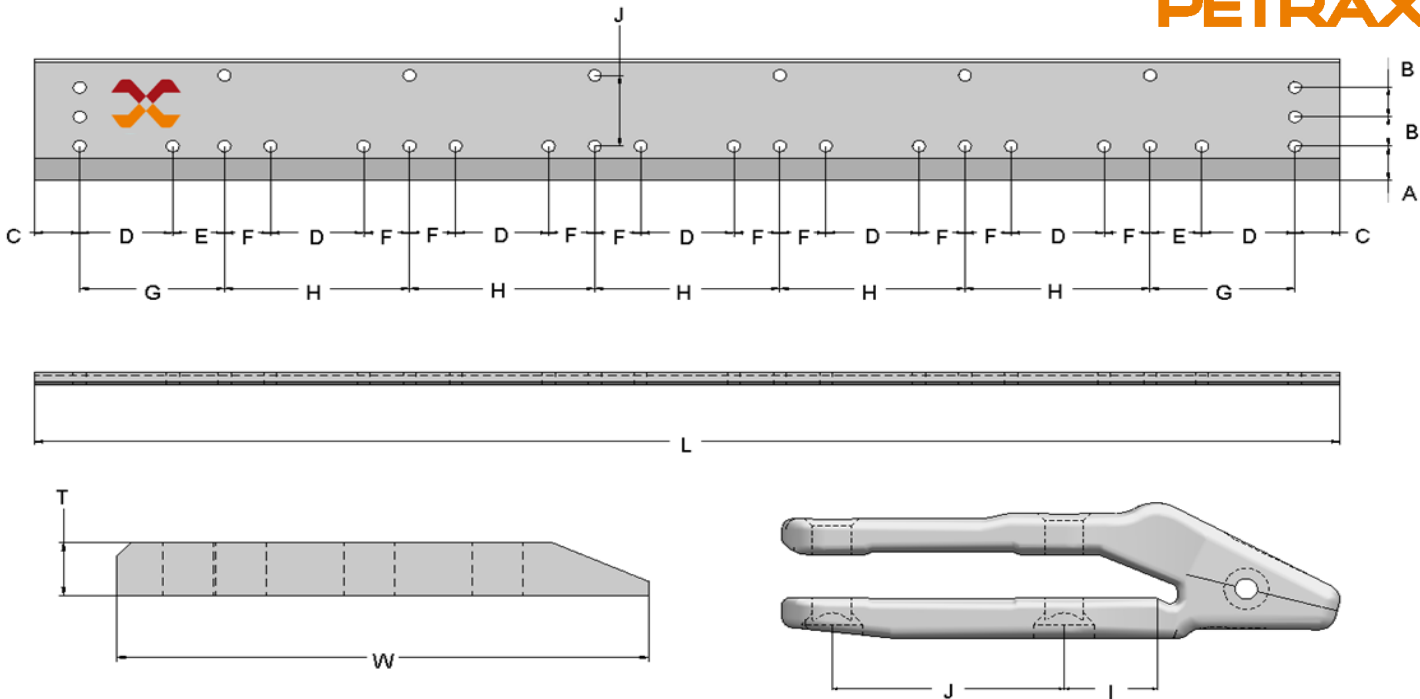


9V6573

Dimensions - Base Edge			Hole Spacing			Adapter		4T4307	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	32.0 mm.	1.25"	A	79.0 mm.	3.12"	I	81.2 mm.	3.20"	
W	282.0 mm.	11.10"	B	68.0 mm.	2.67"	J	165.0 mm.	6.50"	
L	2736.0 mm.	107.74"	C	94.5 mm.	3.72"	Holes & Weight		Taladros y Peso	
			D	195.0 mm.	7.68"	Qty	30		
			E	108.5 mm.	4.27"	Bolt	25.4 mm.		1"
			F	96.5 mm.	3.80"	Weight	178.72 Kg		394.0 Lbs
			G	303.5 mm.	11.94"				
			H	388.0 mm.	15.27"				

6W2989

Dimensions - Base Edge			Hole Spacing			Adapter		3G9307	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	32.0 mm.	1.25"	A	83.0 mm.	3.27"	I	86.0 mm.	3.37"	
W	282.0 mm.	11.10"	B	75.0 mm.	2.95"	J	160.0 mm.	6.25"	
L	2840.0 mm.	111.82"	C	136.5 mm.	5.37"	Holes & Weight		Taladros y Peso	
			D	140.0 mm.	5.51"	Qty	30		
			E	136.0 mm.	5.35"	Bolt	31.75 mm.		1-1/4"
			F	131.5 mm.	5.17"	Weight	180.39 Kg		397.0 Lbs
			G	276.0 mm.	10.70"				
			H	403.0 mm.	15.87"				

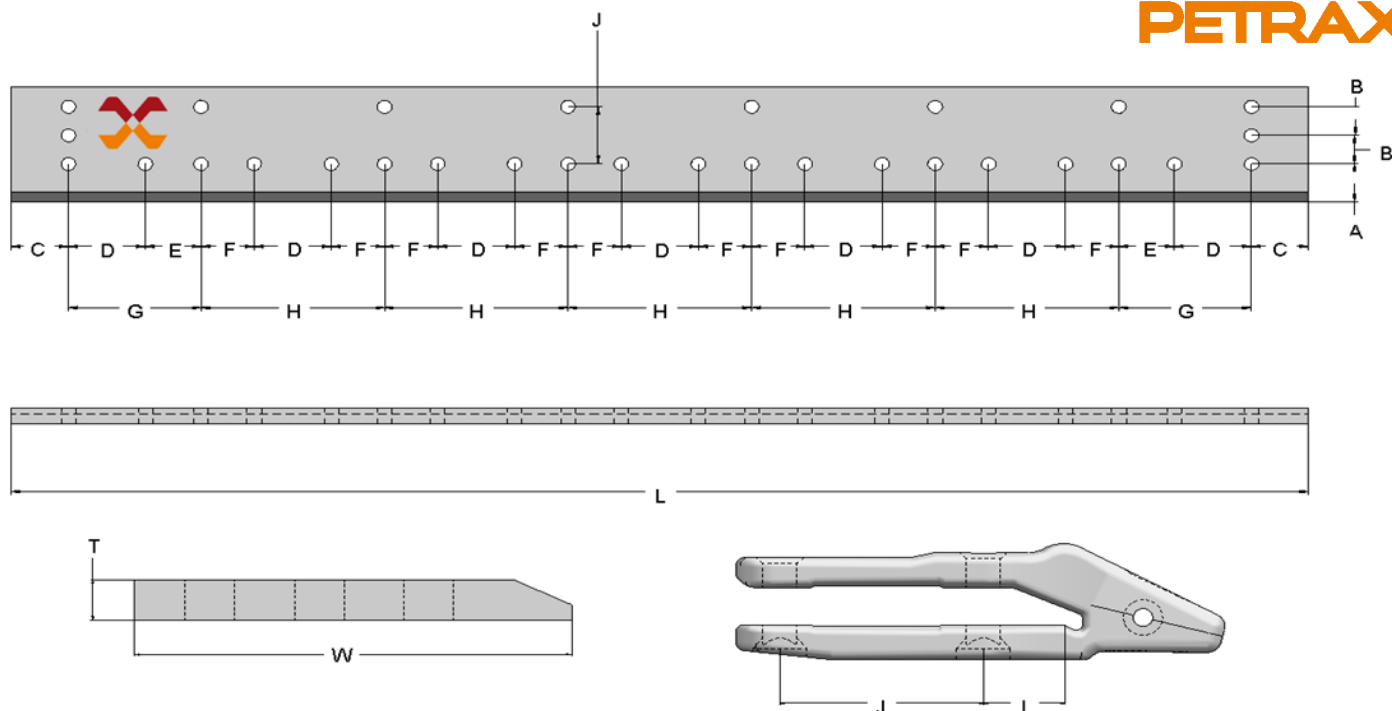


6W2981

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	I	101.6 mm.	4.00"
W	300.0 mm.	11.81"	B	75.0mm.	2.95"	J	150.0 mm.	5.90"
L	2846.0 mm.	112.0"	C	130.5 mm.	5.13"	Holes & Weight		Taladros y Peso
			D	140.0 mm.	5.51"	Qty	30	
			E	145.0 mm.	5.70"	Bolt	31.75 mm.	1-1/4"
			F	131.5 mm.	5.17"	Weight	226.21 Kg	498.7 Lbs
			G	285.0 mm.	11.02"			
			H	403.0 mm.	15.86"			

6W2990

Dimensions - Base Edge			Hole Spacing			Adapter		3G9307	
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes			
T	32.0 mm.	1.25"	A	83.0 mm.	3.27"	I	86.0 mm.	3.37"	
W	282.0 mm.	11.10"	B	75.0 mm.	2.95"	J	160.0 mm.	6.25"	
L	2856.0 mm.	112.40"	C	135.5 mm.	5.33"	Holes & Weight		Taladros y Peso	
			D	140.0 mm.	5.51"	Qty	30		
			E	145.0 mm.	5.70"	Bolt	31.75 mm.	1-1/4"	
			F	131.5 mm.	5.17"	Weight	179.17 Kg	395.0 Lbs	
			G	285.0 mm.	11.02"				
			H	403.0 mm.	15.86"				

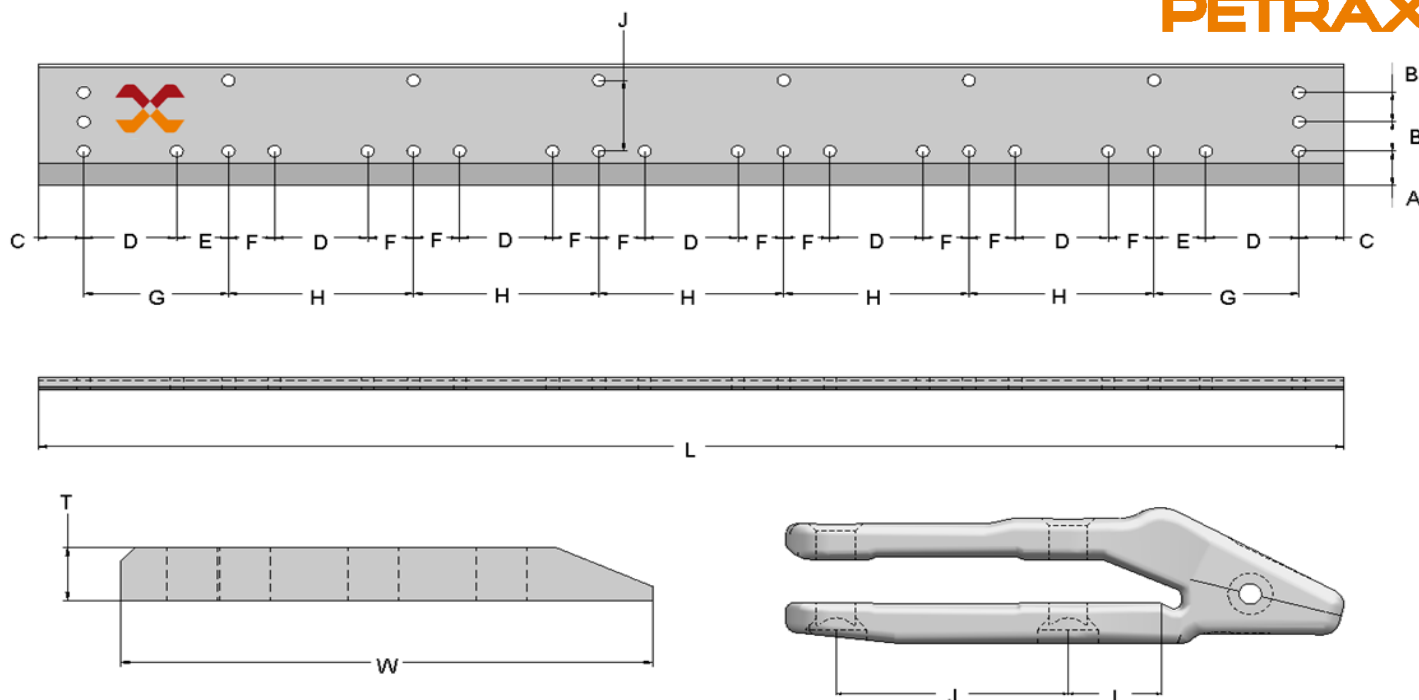


141-4847

Dimensions - Base Edge			Hole Spacing			Adapter		4T4307
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	32.0 mm.	1.25"	A	79.0 mm.	3.12"	I	81.2 mm.	3.20"
W	282.0 mm.	11.10"	B	68.0 mm.	2.67"	J	165.0 mm.	6.50"
L	2888.0 mm.	113.70"	C	98.0 mm.	3.85"	Holes & Weight		Taladros y Peso
			D	208.0 mm.	8.18"	Qty	30	
			E	103.0 mm.	4.05"	Bolt	25.4 mm.	1"
			F	103.0 mm.	4.05"	Weight	189.15 Kg	417.0 Lbs
			G	311.0 mm.	12.24"			
			H	414.0 mm.	16.29"			

713631

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	I	101.6 mm.	4.00"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	J	150.0 mm.	5.90"
L	2925.0 mm.	115.16"	C	140.0 mm.	5.51"	Holes & Weight		Taladros y Peso
			D	163.0 mm.	6.41"	Qty	30	
			E	129.5 mm.	5.09"	Bolt	31.75 mm.	1-1/4"
			F	124.5 mm.	4.90"	Weight	240.86 Kg	531.00 Lbs
			G	292.5 mm.	11.51"			
			H	412.0 mm.	16.22"			

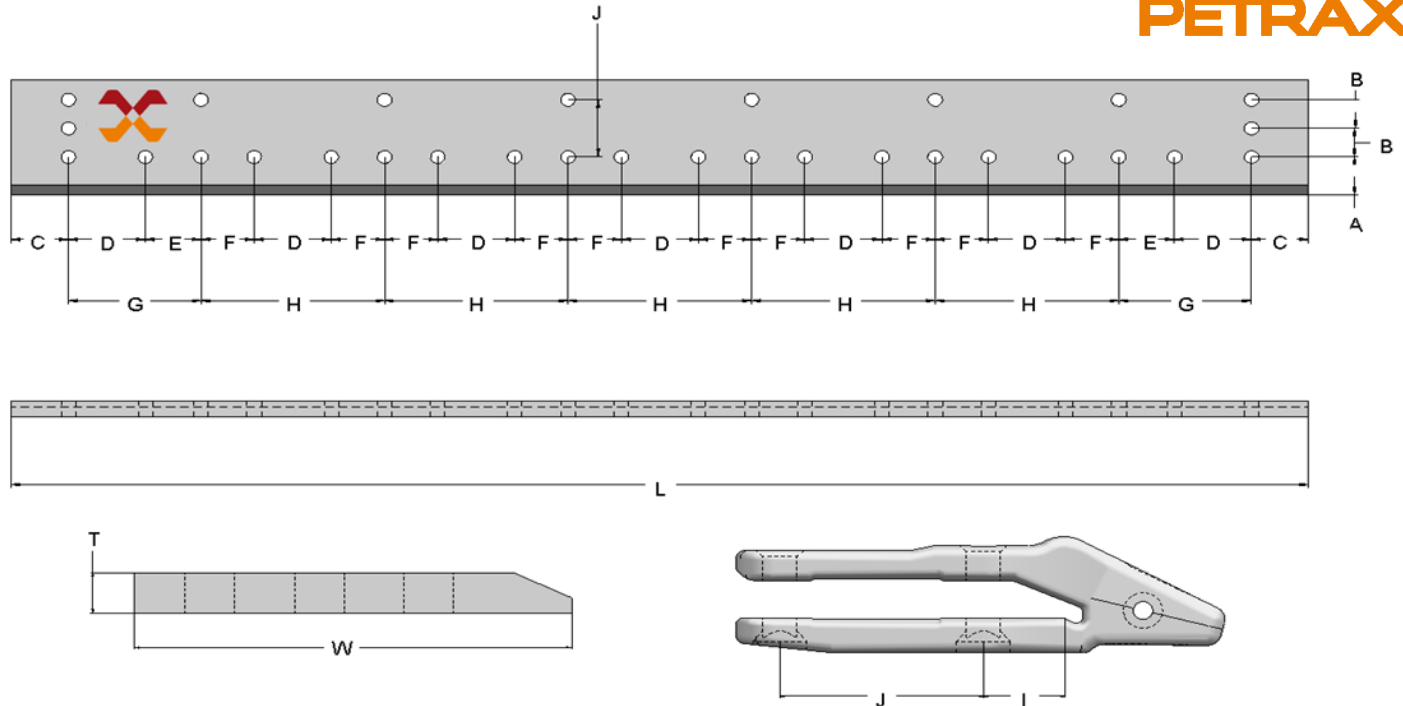


9V6575

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	I	101.6 mm.	4.00"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	J	150.0 mm.	5.90"
L	3032.0 mm.	119.37"	C	133.5 mm.	5.25"	Holes & Weight		Taladros y Peso
			D	180.0 mm.	7.08"	Qty	30	
			E	130.0 mm.	5.11"	Bolt	31.75 mm.	1-1/4"
			F	124.5 mm.	4.90"	Weight	246.21 Kg	542.0 Lbs
			G	310.0 mm.	12.20"			
			H	429.0 mm.	16.88"			

6W2991

Dimensions - Base Edge			Hole Spacing			Adapter		1U1357 6I9898
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	45.0 mm.	1.75"	A	102.0 mm.	4.01"	I	104.0 mm.	4.09"
W	305.0 mm.	12.00"	B	79.0 mm.	3.12"	J	156.0 mm.	6.14"
L	3179.0 mm.	125.12"	C	153.5 mm.	6.04"	Holes & Weight		Taladros y Peso
			D	160.0 mm.	6.30"	Qty	30	
			E	156.0 mm.	6.14"	Bolt	31.75 mm.	1-1/4"
			F	144.0 mm.	5.66"	Weight	313.07 Kg	690.0 Lbs
			G	316.0 mm.	12.44"			
			H	448.0 mm.	17.63"			

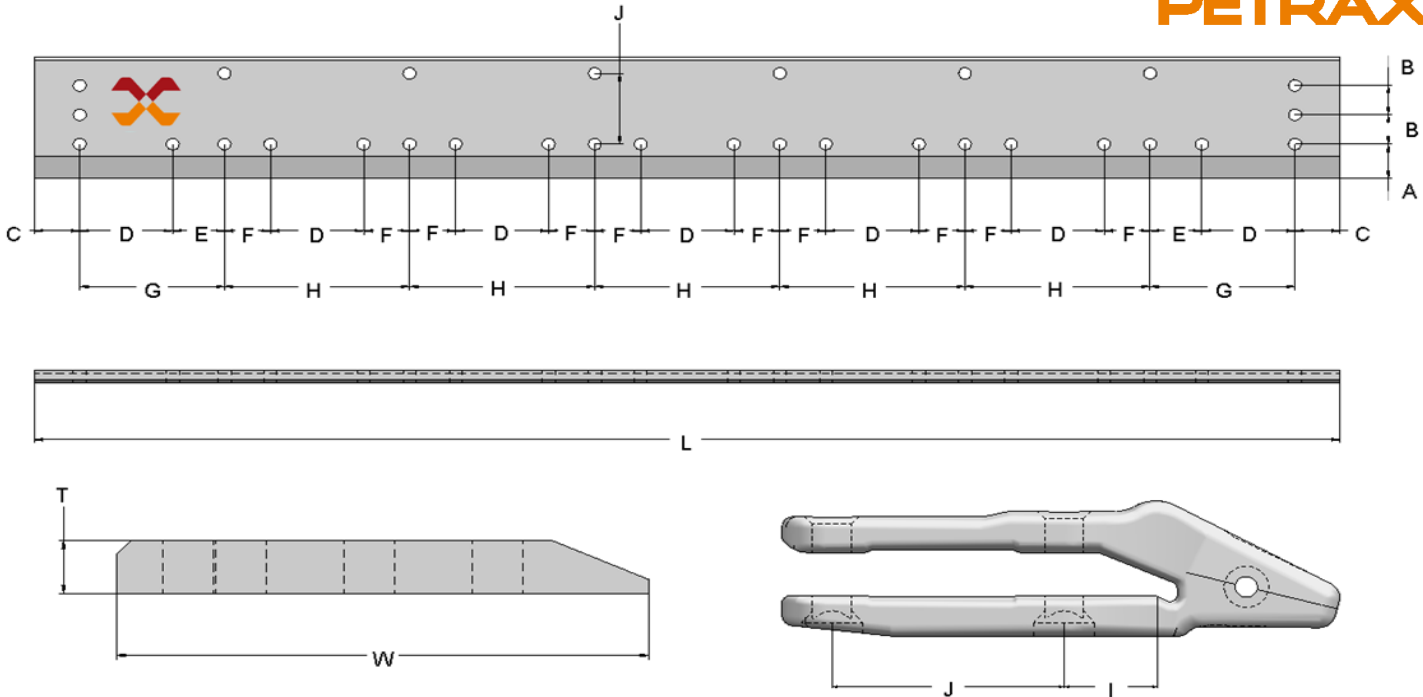


7I3015

Dimensions - Base Edge			Hole Spacing			Adapter		3G3357
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	38.0 mm.	1.50"	A	98.0 mm.	3.85"	I	101.6 mm.	4.00"
W	300.0 mm.	11.81"	B	75.0 mm.	2.95"	J	150.0 mm.	5.90"
L	3194.0 mm.	125.75"	C	135.0 mm.	5.31"	Holes & Weight		Taladros y Peso
			D	203.0 mm.	7.99"	Qty	30	
			E	129.0 mm.	5.07"	Bolt	31.75 mm.	1-1/4"
			F	124.0 mm.	4.88"	Weight	255.28 Kg	562.80 Lbs
			G	332.0 mm.	13.07"			
			H	452.0 mm.	17.79"			

9V6574

Dimensions - Base Edge			Hole Spacing			Adapter		1U1357 6I9898
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	45.0 mm.	1.75"	A	102.0 mm.	4.01"	I	104.0	4.09"
W	305.0 mm.	12.00"	B	79.0 mm.	3.12"	J	156.0	6.14"
L	3315.0 mm.	130.50"	C	154.5 mm.	6.08"	Holes & Weight		Taladros y Peso
			D	160.0 mm.	6.29"	Qty	30	
			E	168.0 mm.	6.61"	Bolt	31.75 mm.	1-1/4"
			F	155.0 mm.	6.10"	Weight	320.37 Kg	706.30 Lbs
			G	328.0 mm.	12.91"			
			H	470.0 mm.	11.93"			

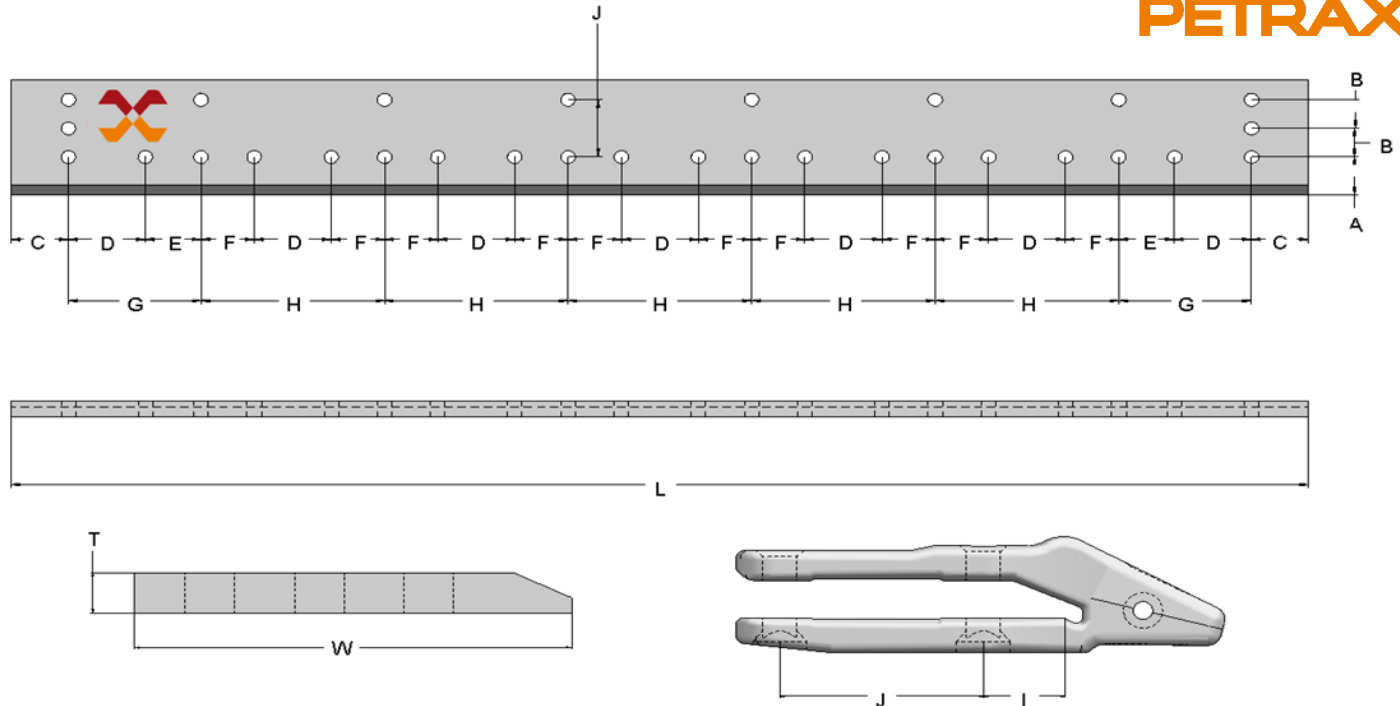


4E6085

Dimensions - Base Edge			Hole Spacing			Adapter		8E2487
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	45.0 mm.	1.75"	A	102.0 mm.	4.01"	I	104.0 mm.	4.09"
W	305.0 mm.	12.00"	B	79.0 mm.	3.12"	J	156.0 mm.	6.14"
L	3561.0 mm.	140.16"	C	157.0 mm.	6.18"	Holes & Weight		Taladros y Peso
			D	160.0 mm.	6.29"	Qty	30	
			E	186.0 mm.	7.32"	Bolt	31.75 mm.	1-1/4"
			F	175.5 mm.	6.90"	Weight	348.68 Kg	768.70 Lbs
			G	346.0 mm.	13.62"			
			H	511.0 mm.	20.12"			

111-9770


Dimensions - Base Edge			Hole Spacing			Adapter		6/9898
Dimensiones - Cuchilla Base			Distancia entre agujeros			Portadientes		
T	45.0 mm.	1.75"	A	102.0 mm.	4.01"	I	104.0 mm.	4.09"
W	305.0 mm.	12.00"	B	79.0 mm.	3.12"	J	156.0 mm.	6.14"
L	3405.0 mm.	134.06"	C	154.0 mm.	6.06"	Holes & Weight		Taladros y Peso
			D	185.0 mm.	7.28"	Qty	30	
			E	151.0 mm.	5.94"	Bolt	31.75 mm.	1-1/4"
			F	150.0 mm.	5.90"	Weight	326.45 Kg	719.70 Lbs
			G	336.0 mm.	13.22"			
			H	485.0 mm.	19.09"			

Bolt-On Cutting Edges - Center. Subcuchillas - Central.

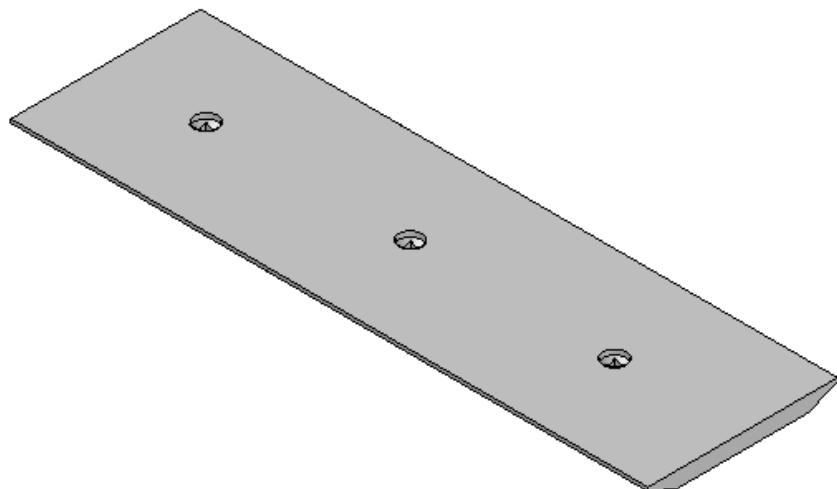


Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		
4T2910	19.0 mm	0.75"	254.0 mm	10.00"	354.0 mm	13.90"	2	3/4"	50
9W9944	19.0 mm	0.75"	254.0 mm	10.00"	372.5 mm	14.70"	2	3/4"	50
4T2914	19.0 mm	0.75"	254.0 mm	10.00"	431.8 mm	17.00"	2	3/4"	50
1U2352	19.0 mm	0.75"	254.0 mm	10.00"	433.0 mm	17.04"	2	3/4"	51
4T2918	19.0 mm	0.75"	254.0 mm	10.00"	585.4 mm	23.00"	2	3/4"	51
4T2919	19.0 mm	0.75"	254.0 mm	10.00"	946.0 mm	37.20"	3	3/4"	52
4T2912	19.0 mm	0.75"	254.0 mm	10.00"	955.0 mm	37.60"	4	3/4"	52
9W9943	19.0 mm	0.75"	254.0 mm	10.00"	1231.0 mm	48.50"	4	7/8"	53
4T8796	19.0 mm	0.75"	254.0 mm	10.00"	1238.0 mm	48.70"	3	3/4"	53
4T2913	19.0 mm	0.75"	254.0 mm	10.00"	1308.0 mm	51.50"	3	3/4"	54
4T2915	19.0 mm	0.75"	254.0 mm	10.00"	1486.0 mm	58.50"	3	3/4"	54
9W8620	19.0 mm	0.75"	254.0 mm	10.00"	1524.0 mm	60.00"	4	3/4"	55
1U1465	25.4 mm	1.00"	280.0 mm	11.00"	787.8 mm	31.00"	3	1"	55

Bolt-On Cutting Edges - Center. Subcuchillas - Central.

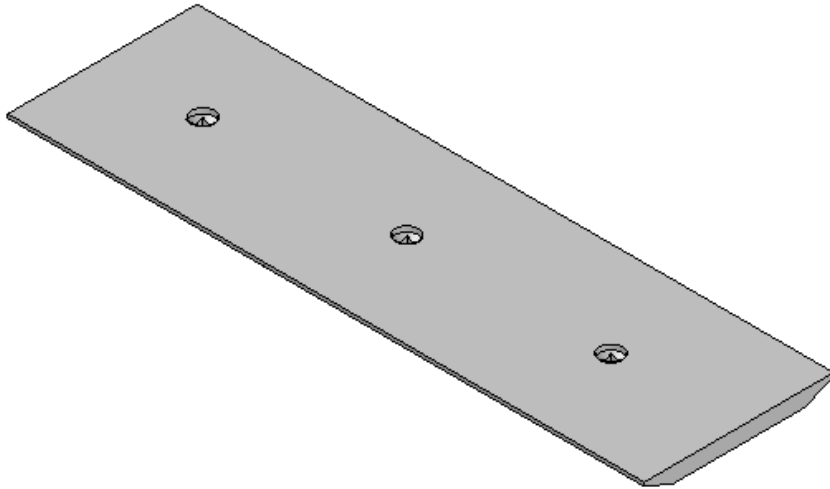


Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		
132-1026	35.0 mm	1.37"	280.0 mm	11.00"	787.8 mm	31.00"	3	1"	56
1U1464	25.4 mm	1.00"	280.0 mm	11.00"	818.8 mm	32.20"	3	1"	56
132-1027	35.0 mm	1.37"	280.0 mm	11.00"	818.8 mm	32.20"	3	1"	56
1U0605	25.4 mm	1.00"	280.0 mm	11.00"	851.0 mm	33.50"	3	1"	57
1U0294	25.4 mm	1.00"	280.0 mm	11.00"	878.0 mm	34.60"	3	1"	57
1U0293	25.4 mm	1.00"	280.0 mm	11.00"	941.0 mm	37.00"	3	1"	57
4T9563	25.4 mm	1.00"	280.0 mm	11.00"	966.5 mm	38.05"	3	1"	58
1U0295	25.4 mm	1.00"	280.0 mm	11.00"	1025.5 mm	40.37"	3	1"	58
1U1467	25.4 mm	1.00"	280.0 mm	11.00"	1035.0 mm	40.74"	4	1"	59
1U0607	25.4 mm	1.00"	280.0 mm	11.00"	1044.0 mm	41.10"	3	1"	59
8E4567	25.4 mm	1.00"	280.0 mm	11.00"	1102.0 mm	43.40"	3	1"	60
8A8444	25.4 mm	1.00"	280.0 mm	11.00"	1128.0 mm	44.40"	3	1"	60
1U0292	25.4 mm	1.00"	280.0 mm	11.00"	1162.0 mm	45.75"	3	1"	60
107-3746	25.4 mm	1.00"	280.0 mm	11.00"	1182.0 mm	46.56"	3	1"	61
110-4711	25.4 mm	1.00"	280.0 mm	11.00"	1200.0 mm	47.24"	3	1"	61
1U1475	30.0 mm	1.18"	360.0 mm	14.17"	755.5 mm	29.74"	4	1"	62

Bolt-On Cutting Edges - Center. Subcuchillas - Central.

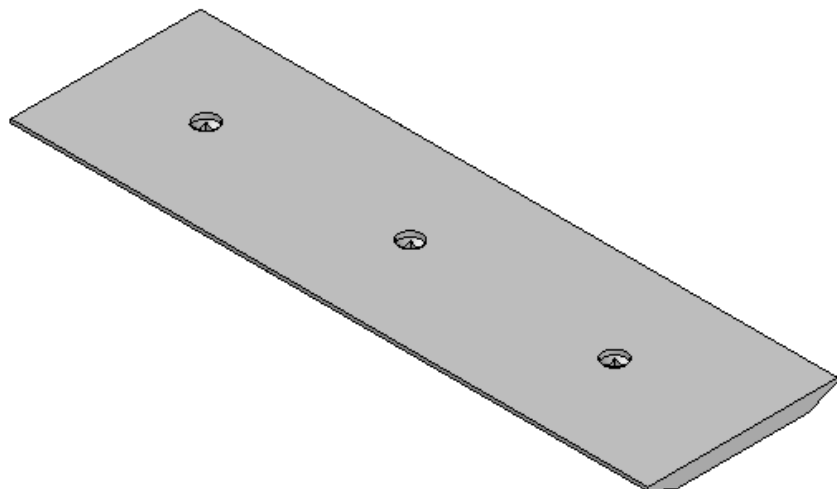


Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		
1U1469	30.0 mm	1.18"	360.0 mm	14.17"	841.0 mm	33.10"	3	1"	62
132-1029	35.0 mm	1.37"	360.0 mm	14.17"	841.0 mm	33.10"	3	1"	63
1U2410	30.0 mm	1.18"	360.0 mm	14.17"	960.0 mm	37.80"	3	1"	63
1U0599	30.0 mm	1.18"	360.0 mm	14.17"	976.0 mm	38.40"	3	1"	63
1U1470	30.0 mm	1.18"	360.0 mm	14.17"	990.5 mm	39.00"	4	1"	64
132-1028	35.0 mm	1.37"	360.0 mm	14.17"	990.5 mm	39.00"	4	1"	64
1U2408	30.0 mm	1.18"	360.0 mm	14.17"	1017.5 mm	40.10"	3	1-1/4"	65
1U2414	30.0 mm	1.18"	360.0 mm	14.17"	1044.0 mm	41.10"	3	1"	65
132-1030	35.0 mm	1.37"	360.0 mm	14.17"	1044.0 mm	41.10"	3	1"	65
1U2411	30.0 mm	1.18"	360.0 mm	14.17"	1056.0 mm	41.60"	3	1"	66
1U0600	30.0 mm	1.18"	360.0 mm	14.17"	1079.0 mm	42.50"	3	1"	66
1U0591	30.0 mm	1.18"	360.0 mm	14.17"	1106.0 mm	43.50"	3	1-1/4"	66
1U1471	30.0 mm	1.18"	360.0 mm	14.17"	1121.1 mm	44.10"	4	1"	67
1U1473	30.0 mm	1.18"	360.0 mm	14.17"	1140.2 mm	44.90"	4	1"	67
1U2412	30.0 mm	1.18"	360.0 mm	14.17"	1148.0 mm	45.20"	3	1"	68
132-1031	35.0 mm	1.37"	360.0 mm	14.17"	1148.0 mm	45.20"	3	1"	68
1U2413	30.0 mm	1.18"	360.0 mm	14.17"	1162.0 mm	45.70"	3	1"	68

Bolt-On Cutting Edges - Center. Subcuchillas - Central.

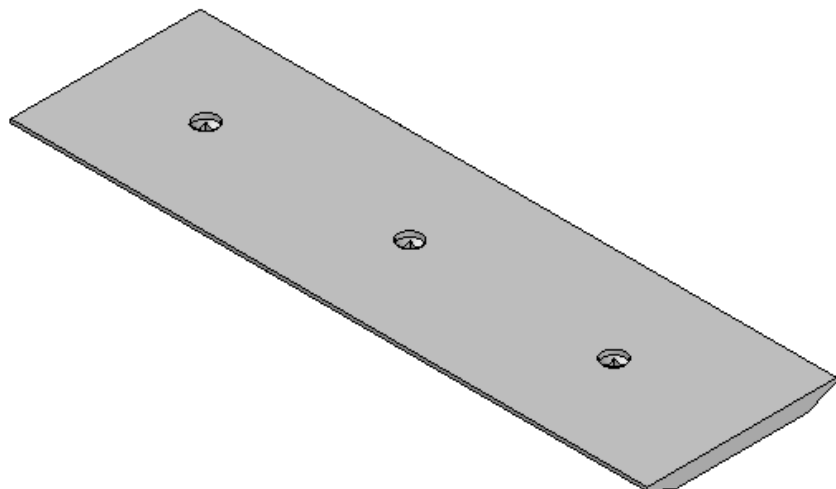

Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		
132-1032	35.0 mm	1.37"	360.0 mm	14.17"	1162.0 mm	45.70"	3	1"	69
1U2409	30.0 mm	1.18"	360.0 mm	14.17"	1205.0 mm	47.40"	3	1"	69
1U0601	30.0 mm	1.18"	360.0 mm	14.17"	1210.0 mm	47.64"	3	1"	69
132-1034	35.0 mm	1.37"	360.0 mm	14.17"	1210.0 mm	47.64"	3	1"	70
1U2407	30.0 mm	1.18"	360.0 mm	14.17"	1222.5 mm	48.10"	3	1-1/4"	70
1U2406	30.0 mm	1.18"	360.0 mm	14.17"	1230.5 mm	48.40"	3	1-1/4"	70
139-9230	30.0 mm	1.18"	360.0 mm	14.17"	1280.2 mm	50.40"	3	1"	71
1U0593	30.0 mm	1.18"	360.0 mm	14.17"	1319.0 mm	51.93"	3	1-1/4"	71
1U1909	30.0 mm	1.18"	360.0 mm	14.17"	1263.6 mm	49.75"	3	1-1/4"	71
100-6668	30.0 mm	1.18"	360.0 mm	14.17"	1399.5 mm	55.10"	3	1-1/4"	72
4T5273	35.0 mm	1.37"	406.0 mm	16.00"	1337.0 mm	52.63"	3	1-1/4"	72
9W1375	35.0 mm	1.37"	406.0 mm	16.00"	1524.0 mm	60.00"	3	1-1/4"	72
100-4045	35.0 mm	1.37"	406.0 mm	16.00"	1230.5 mm	48.44"	3	1-1/4"	73
100-4046	35.0 mm	1.37"	406.0 mm	16.00"	1319.0 mm	51.93"	3	1-1/4"	73
1U0762	35.0 mm	1.37"	406.0 mm	16.00"	1406.0 mm	55.35"	3	1-1/4"	73
109-9212	35.0 mm	1.37"	406.0 mm	16.00"	1451.0 mm	57.12"	3	1-1/4"	74
104-5841	35.0 mm	1.37"	406.0 mm	16.00"	1587.0 mm	62.50"	3	1-1/4"	74

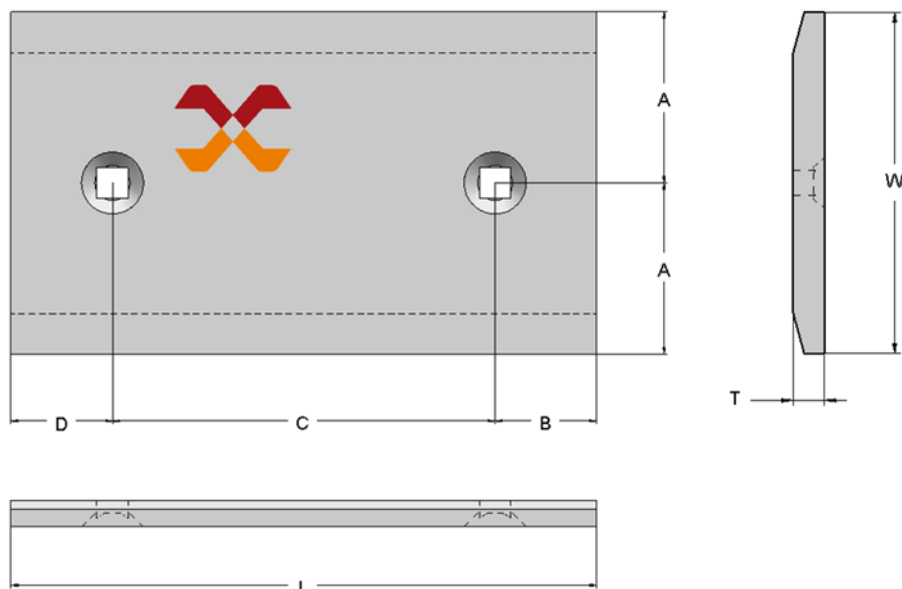

4T2910


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	2	
W	254.0 mm.	10.00"	B	76.0 mm.	2.99"	Bolt	19.0 mm.	0.75" (3/4")
L	354.0 mm.	13.90"	C	202.0 mm.	7.95"	Weight	12.25 Kg	27.0 Lbs
			D	76.0 mm.	2.99"			

9W9944

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	2	
W	254.0 mm.	10.00"	B	76.0 mm.	2.99"	Bolt	19.0 mm.	0.75" (3/4")
L	372.5 mm.	14.70"	C	220.5 mm.	8.68"	Weight	13.15 Kg	29.0 Lbs
			D	76.0 mm.	2.99"			

4T2914

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	2	
W	254.0 mm.	10.00"	B	74.6 mm.	2.93"	Bolt	19.0 mm.	0.75" (3/4")
L	431.8 mm.	17.00"	C	282.5 mm.	11.12"	Weight	15.42 Kg	34.0 Lbs
			D	74.6 mm.	2.93"			

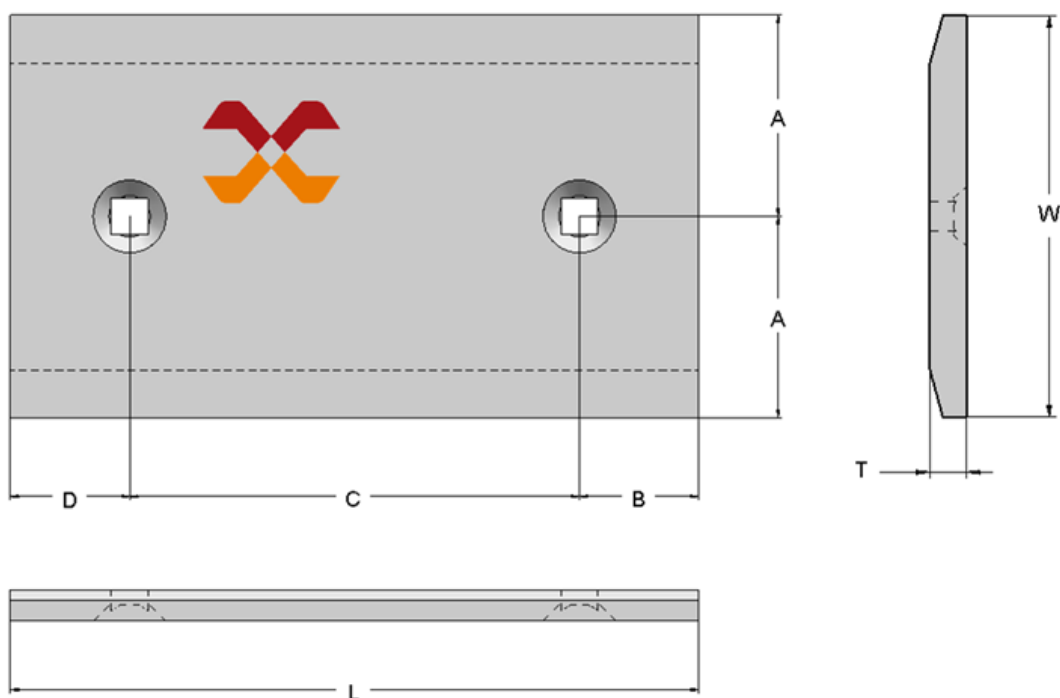


1U2352

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	2	
W	254.0 mm.	10.00"	B	75.0 mm.	2.95"	Bolt	19.0 mm.	0.75" (3/4")
L	433.0 mm.	17.04"	C	283.0 mm.	11.14"	Weight	15.42 Kg	34.0 Lbs
			D	75.0 mm.	2.95"			


4T2918

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	2	
W	254.0 mm.	10.00"	B	136.0 mm.	5.35"	Bolt	19.0 mm.	0.75" (3/4")
L	585.4 mm.	23.00"	C	313.4 mm.	12.34"	Weight	19.96 Kg	44.0 Lbs
			D	136.0 mm.	5.35"			

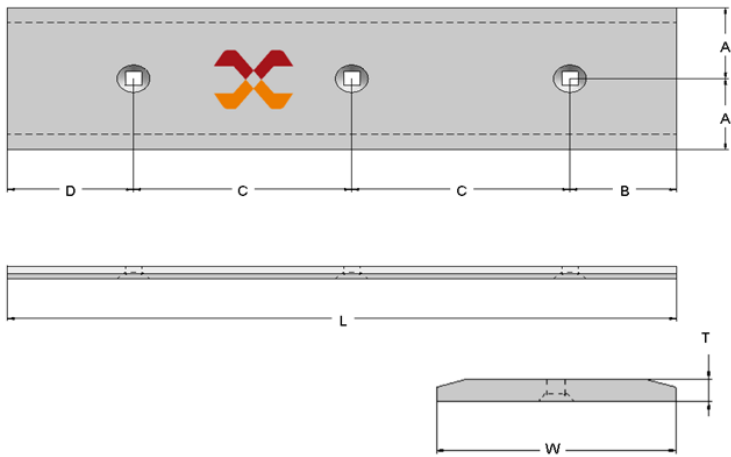


4T2919

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	3	
W	254.0 mm.	10.00"	B	160.0 mm.	6.30"	Bolt	19.0 mm.	0.75" (3/4")
L	946.0 mm.	37.20"	C	325.0 mm.	12.80"	Weight	32.21 Kg	71.0 Lbs
			D	136.0 mm.	5.35"			

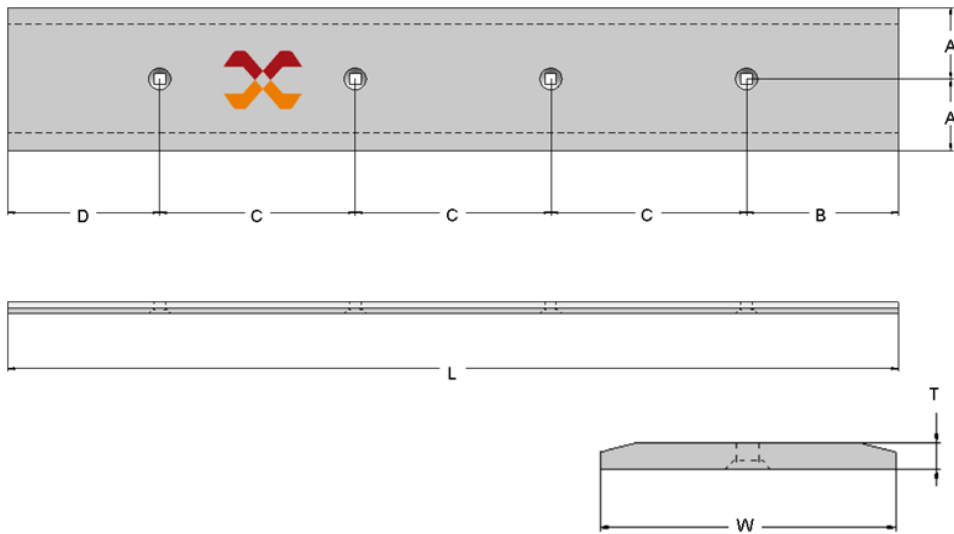


4T2912

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	4	
W	254.0 mm.	10.00"	B	103.0 mm.	4.06"	Bolt	19.0 mm.	0.75" (3/4")
L	955.0 mm.	37.60"	C	244.0 mm.	9.61"	Weight	32.66 Kg	72.0 Lbs
			D	120.0 mm.	4.72"			

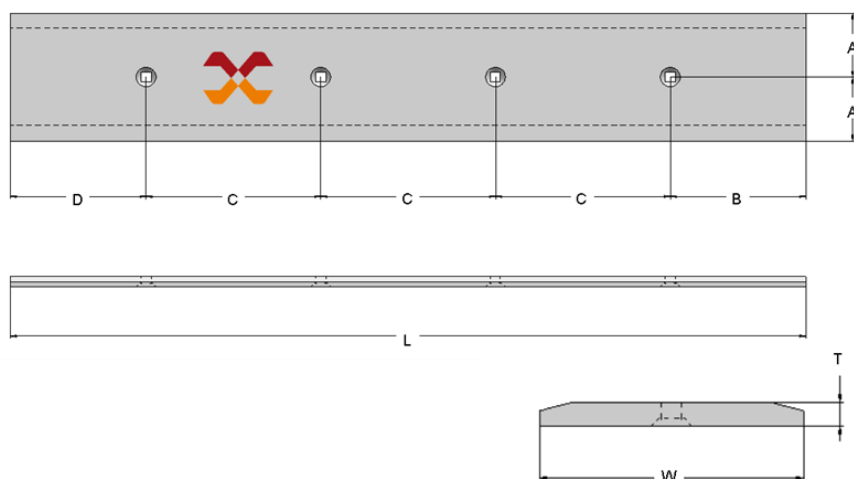


9W9943

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	4	
W	254.0 mm.	10.00"	B	197.0 mm.	7.76"	Bolt	22.0 mm.	0.87" (7/8")
L	1231.0 mm.	48.50"	C	279.0 mm.	10.98"	Weight	43.09 Kg	95.0 Lbs
			D	197.0 mm.	7.76"			

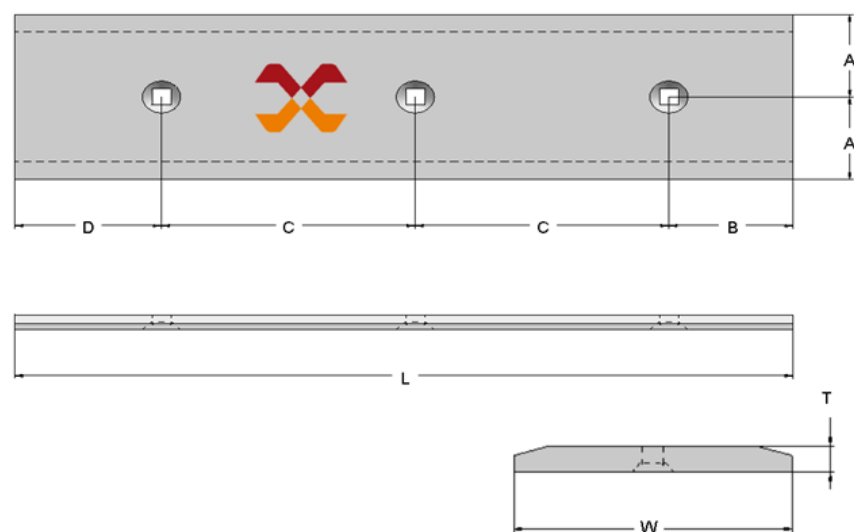

4T8796

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	3	
W	254.0 mm.	10.00"	B	269.0 mm.	10.59"	Bolt	19.0 mm.	0.75" (3/4")
L	1238.0 mm.	48.70"	C	350.0 mm.	13.78"	Weight	44.0 Kg	97.0 Lbs
			D	269.0 mm.	10.59"			

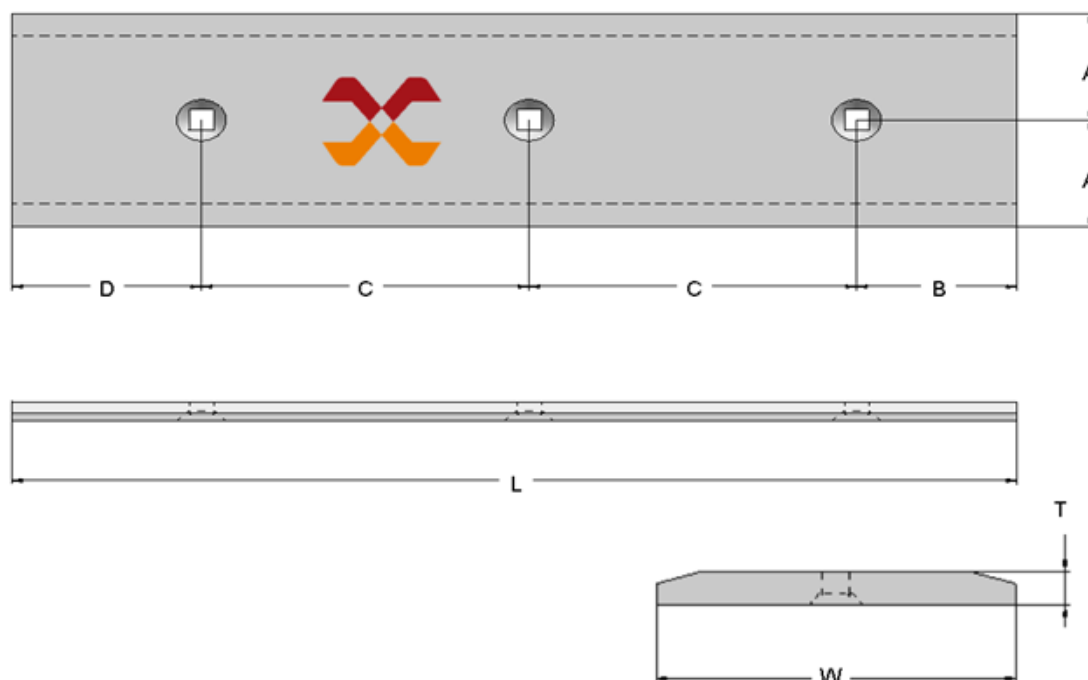


4T2913

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	3	
W	254.0 mm.	10.00"	B	287.3 mm.	11.31"	Bolt	19.0 mm.	0.75" (3/4")
L	1308.0 mm.	51.50"	C	366.7 mm.	14.43"	Weight	44.91 Kg	99.0 Lbs
			D	287.3 mm.	11.31"			


4T2915

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	3	
W	254.0 mm.	10.00"	B	331.0 mm.	13.03"	Bolt	19.0 mm.	0.75" (3/4")
L	1486.0 mm.	58.50"	C	412.0 mm.	16.22"	Weight	51.26 Kg	113.0 Lbs
			D	331.0 mm.	13.03"			

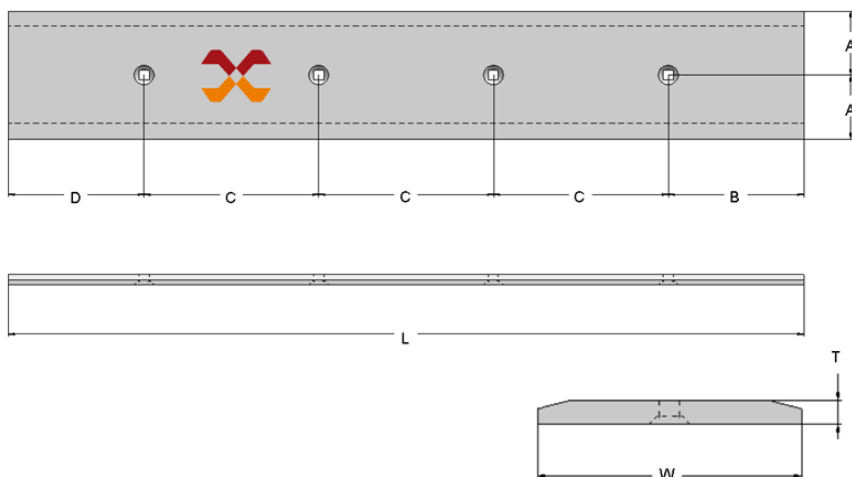


9W8620

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	127.0 mm.	5.00"	Qty	4	
W	254.0 mm.	10.00"	B	257.2 mm.	10.12"	Bolt	19.0 mm.	0.75" (3/4")
L	1524.0 mm.	60.00"	C	336.5 mm.	13.25"	Weight	54.43 Kg	120.0 Lbs
			D	257.2 mm.	10.12"			

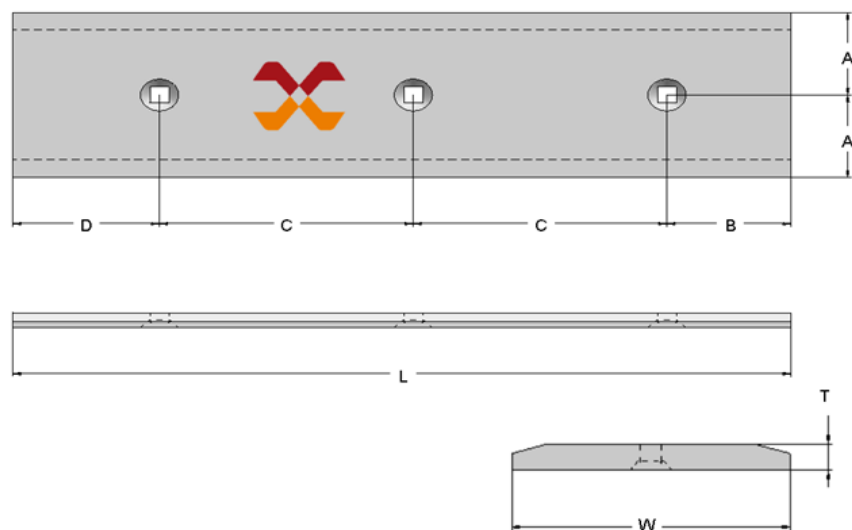

1U1465

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	124.0 mm.	4.88"	Bolt	25.4 mm.	1.00"
L	787.8 mm.	31.00"	C	269.9 mm.	16.63"	Weight	37.19 Kg	82.0 Lbs
			D	124.0 mm.	4.88"			

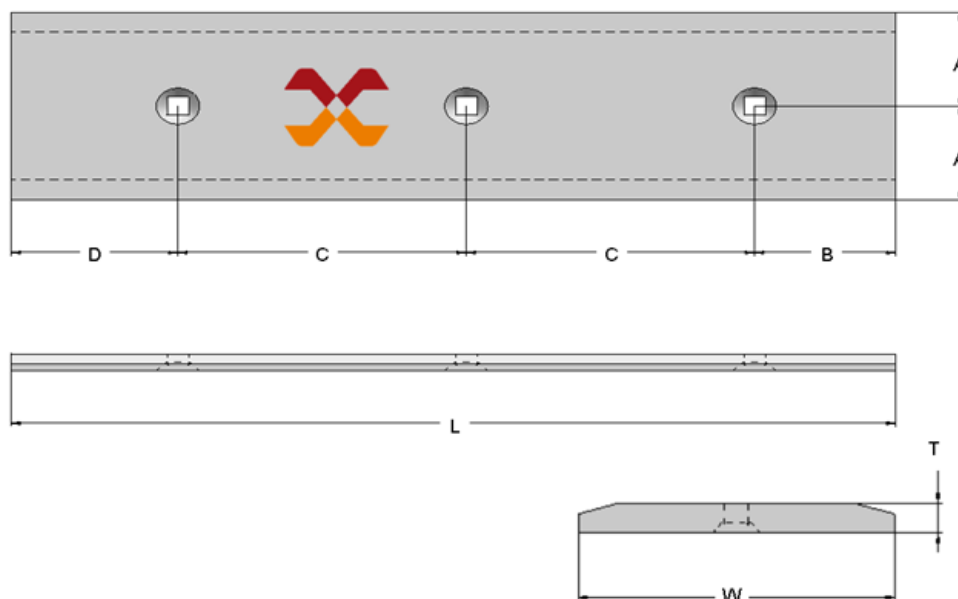

132-1026


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	124.0 mm.	4.88"	Bolt	25.4 mm.	1.00"
L	787.8 mm.	31.00"	C	269.9 mm.	16.63"	Weight	53.98 Kg	119.0 Lbs
			D	124.0 mm.	4.88"			

1U1464

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	139.5 mm.	5.49"	Bolt	25.4 mm.	1.00"
L	818.8 mm.	32.20"	C	269.9 mm.	16.63"	Weight	38.10 Kg	84.0 Lbs
			D	139.5 mm.	5.49"			

132-1027

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	139.5 mm.	5.49"	Bolt	25.4 mm.	1.00"
L	818.8 mm.	32.20"	C	269.9 mm.	16.63"	Weight	53.98 Kg	119.0 Lbs
			D	139.5 mm.	5.49"			

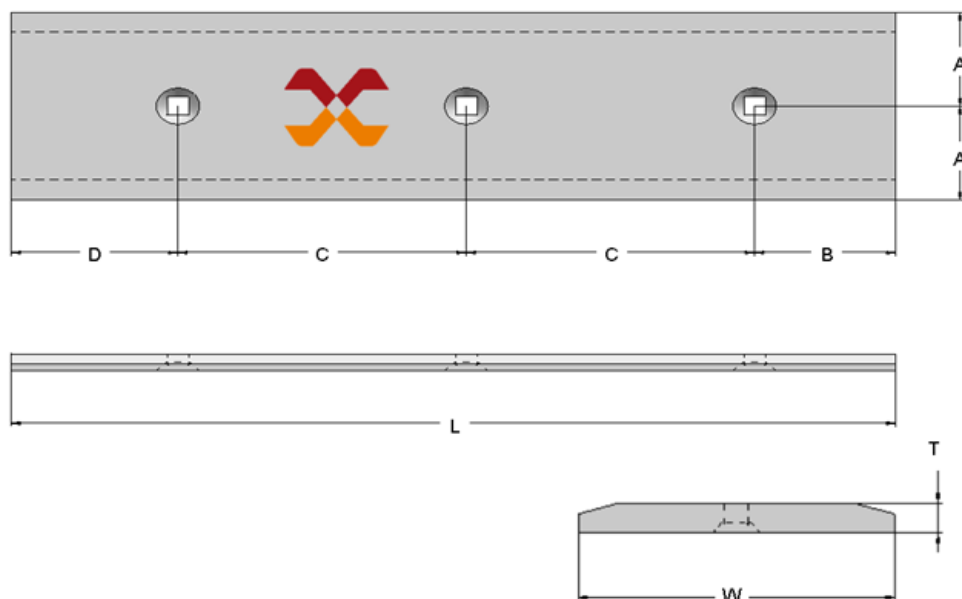

1U0605


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	140.0 mm.	5.50"	Bolt	25.4 mm.	1.00"
L	851.0 mm.	33.50"	C	285.5 mm.	11.24"	Weight	40.23 Kg	88.7 Lbs
			D	140.0 mm.	5.50"			

1U0294

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	144.0 mm.	5.57"	Bolt	25.4 mm.	1.00"
L	878.0 mm.	34.60"	C	295.0 mm.	11.61"	Weight	45.36 Kg	100.0 Lbs
			D	144.0 mm.	5.57"			

1U0293

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	154.5 mm.	6.08"	Bolt	25.4 mm.	1.00"
L	941.0 mm.	37.00"	C	316.0 mm.	12.44"	Weight	48.08 Kg	106.0 Lbs
			D	154.5 mm.	6.08"			

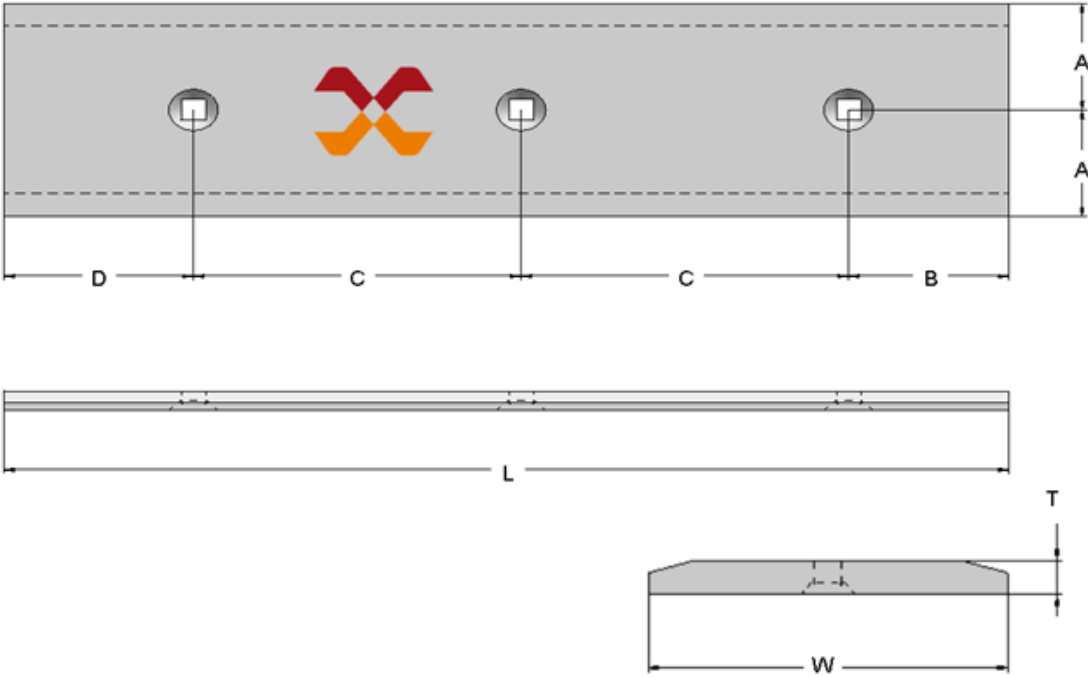


4T9563

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	154.5 mm.	6.08"	Bolt	25.4 mm.	1.00"
L	966.5 mm.	38.05"	C	316.0 mm.	12.44"	Weight	52.16 Kg	115.0 Lbs
			D	180.0 mm.	7.09"			


1U0295

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	165.0 mm.	6.50"	Bolt	25.4 mm.	1.00"
L	1025.5 mm.	40.37"	C	336.5 mm.	13.25"	Weight	48.08 Kg	106.0 Lbs
			D	187.5 mm.	7.37"			

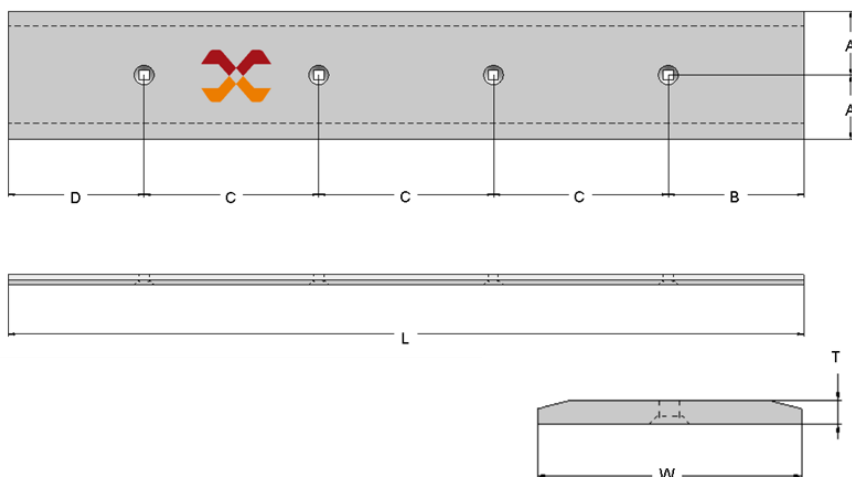


1U1467

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	4	
W	280.0 mm.	11.00"	B	124.0 mm.	4.88"	Bolt	25.4 mm.	1.00"
L	1035.0 mm.	40.74"	C	254.0 mm.	10.00"	Weight	48.53 Kg	107.0 Lbs
			D	149.0 mm.	5.87"			

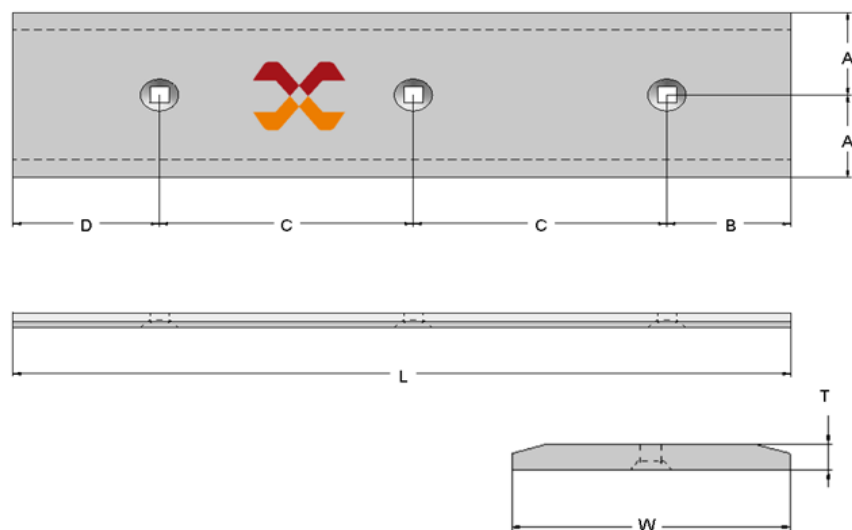

1U0607

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	172.0 mm.	6.77"	Bolt	25.4 mm.	1.00"
L	1044.0 mm.	41.10"	C	350.0 mm.	13.78"	Weight	48.53 Kg	107.0 Lbs
			D	172.0 mm.	6.77"			

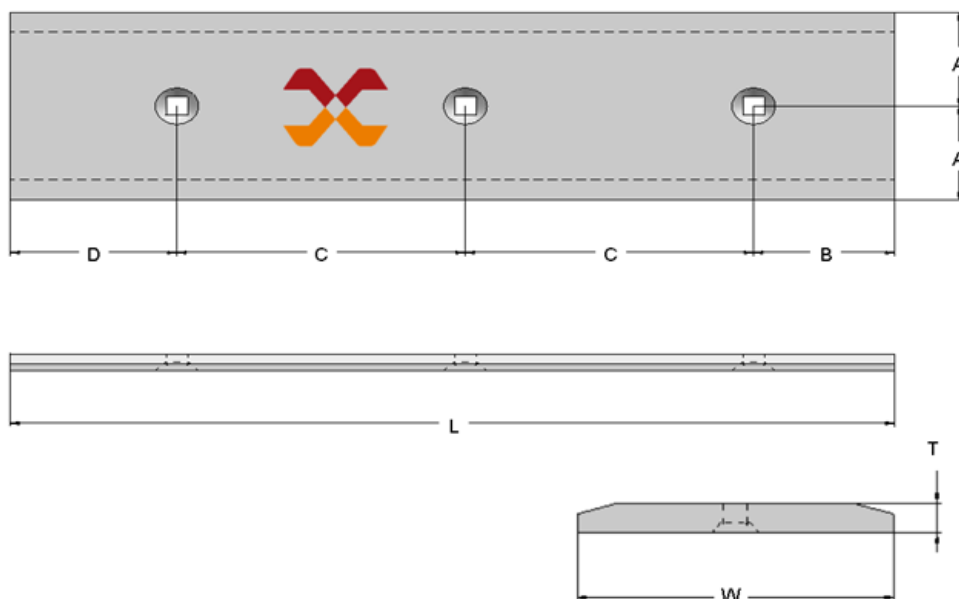

8E4567


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	176.0 mm.	6.93"	Bolt	25.4 mm.	1.00"
L	1102.0 mm.	43.40"	C	359.0 mm.	14.13"	Weight	53.07 Kg	117.0 Lbs
			D	208.0 mm.	8.19"			

8A8444

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	186.0 mm.	7.32"	Bolt	25.4 mm.	1.00"
L	1128.0 mm.	44.40"	C	378.0 mm.	14.88"	Weight	53.07 Kg	117.0 Lbs
			D	186.0 mm.	7.32"			

1U0292

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	184.0 mm.	7.24"	Bolt	25.4 mm.	1.00"
L	1162.0 mm.	45.75"	C	375.0 mm.	14.76"	Weight	54.43 Kg	120.0 Lbs
			D	228.0 mm.	8.97"			


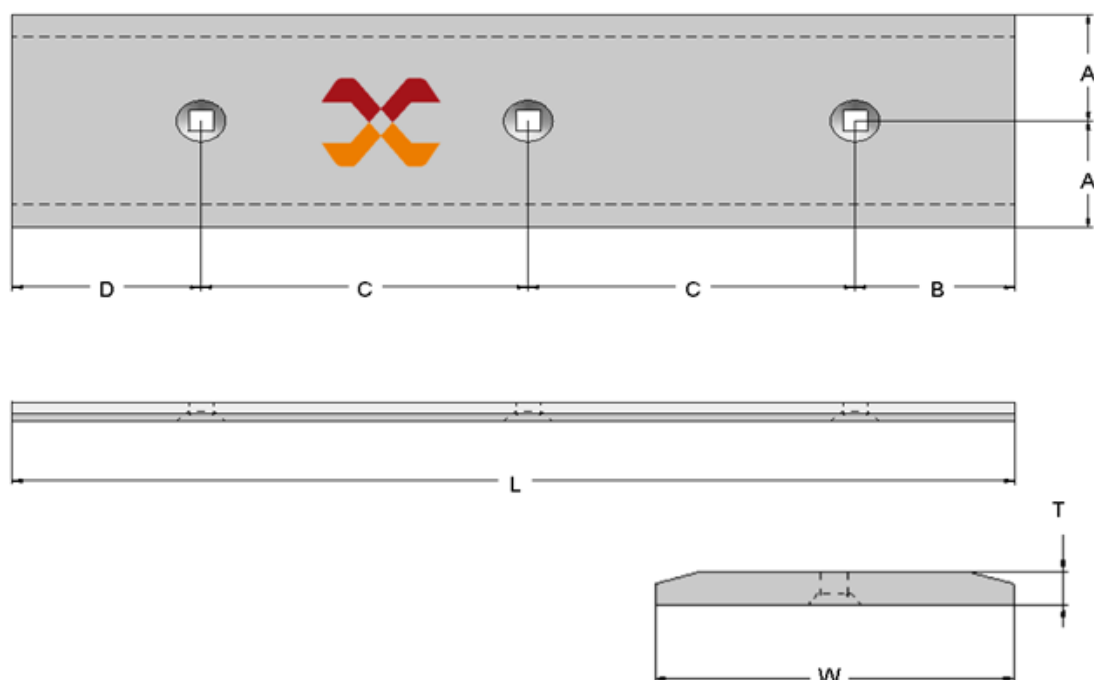


107-3746

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	188.0 mm.	7.40"	Bolt	25.4 mm.	1.00"
L	1182.0 mm.	46.56"	C	380.0 mm.	15.00"	Weight	55.34 Kg	122.0 Lbs
			D	234.0 mm.	9.21"			



110-4711

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	3	
W	280.0 mm.	11.00"	B	190.0 mm.	7.48"	Bolt	25.4 mm.	1.00"
L	1200.0 mm.	47.24"	C	389.0 mm.	15.31"	Weight	55.79 Kg	123.0 Lbs
			D	232.0 mm.	9.13"			

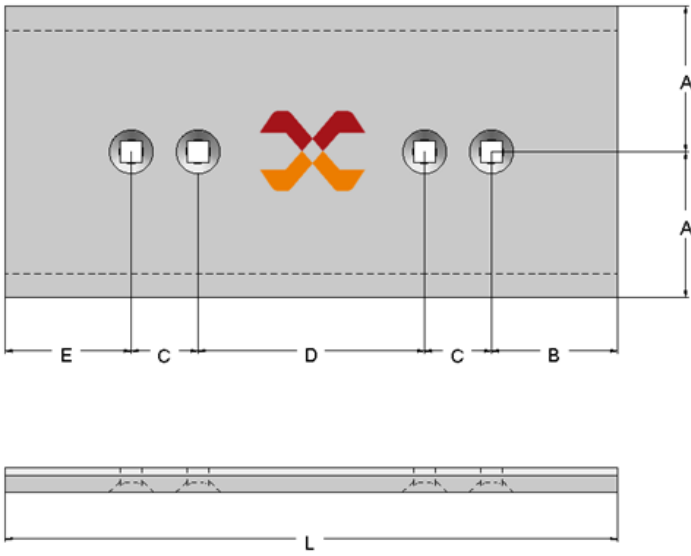


1U1475

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	4	
W	360.0 mm.	14.17"	B	155.5 mm.	6.12"	Bolt	25.4 mm.	1.00"
L	755.5 mm.	29.74"	C	82.5 mm.	3.25"	Weight	54.88 Kg	121.0 Lbs
			D	279.5 mm.	11.00"			
			E	155.5 mm.	6.12"			

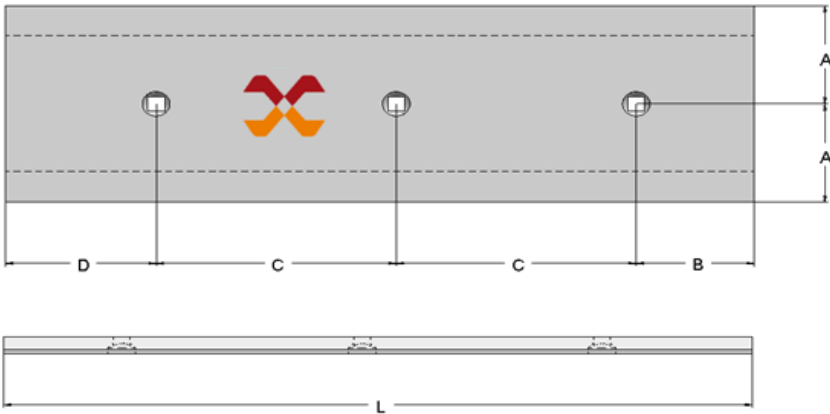

1U1469

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	157.0 mm.	6.18"	Bolt	25.4 mm.	1.00"
L	841.0 mm.	33.10"	C	263.5 mm.	10.37"	Weight	61.23 Kg	135.0 Lbs
			D	157.0 mm.	6.18"			

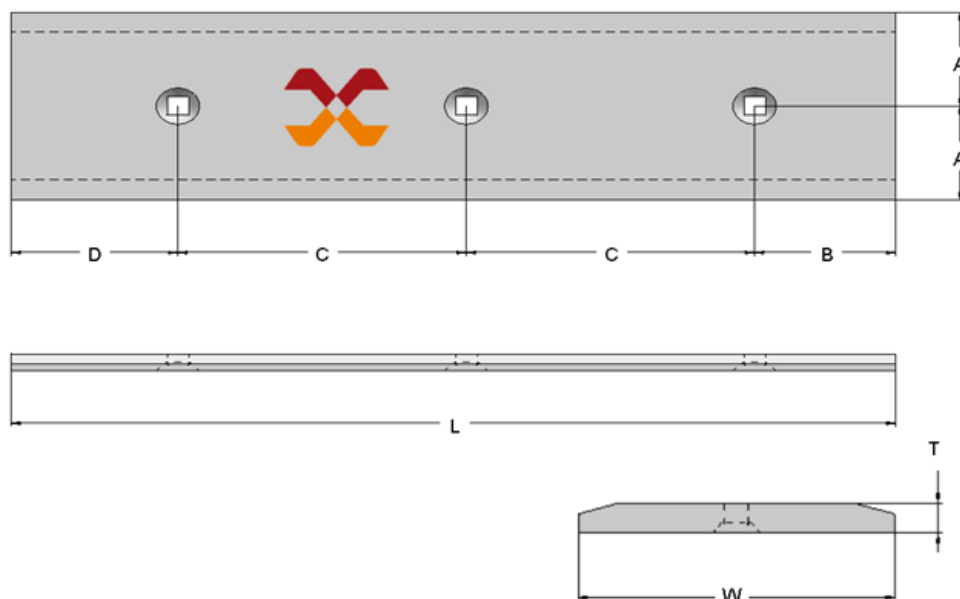

132-1029


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	157.0 mm.	6.18"	Bolt	25.4 mm.	1.00"
L	841.0 mm.	33.10"	C	263.5 mm.	10.37"	Weight	72.12 Kg	159.0 Lbs
			D	157.0 mm.	6.18"			

1U02410

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	158.0 mm.	6.22"	Bolt	25.4 mm.	1.00"
L	960.0 mm.	37.80"	C	322.0 mm.	12.68"	Weight	69.40 Kg	153.0 Lbs
			D	158.0 mm.	6.22"			

1U0599

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	175.0 mm.	6.89"	Bolt	25.4 mm.	1.00"
L	976.0 mm.	38.40"	C	322.0 mm.	12.68"	Weight	70.76 Kg	156.0 Lbs
			D	157.0 mm.	6.18"			

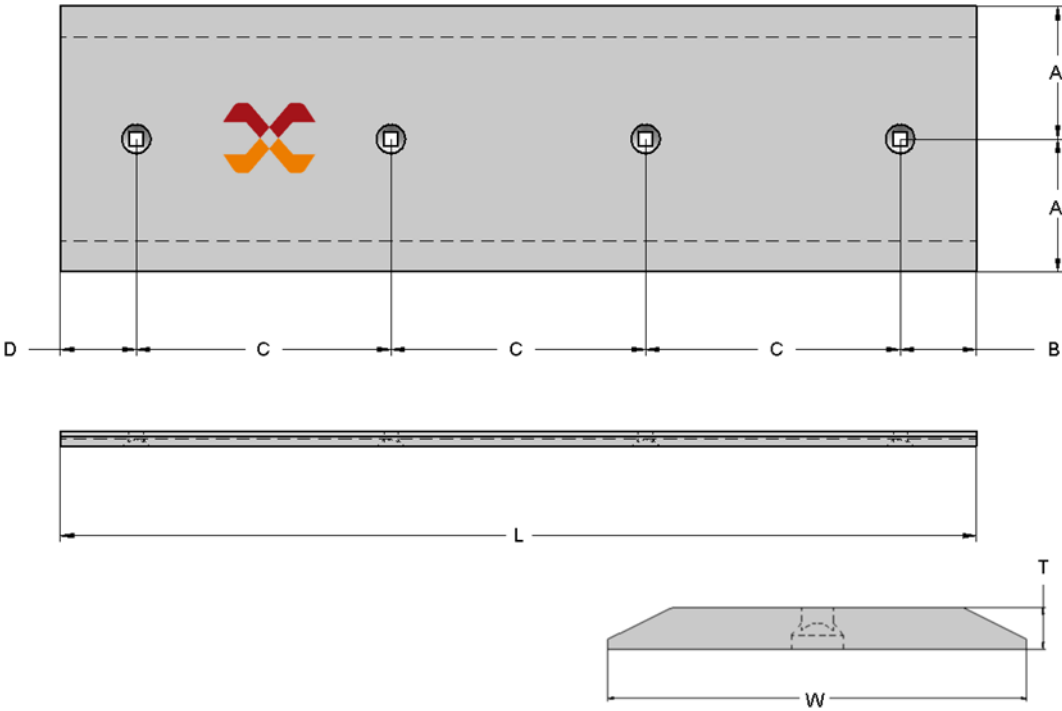


1U1470

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	4	
W	360.0 mm.	14.17"	B	100.0 mm.	3.94"	Bolt	25.4 mm.	1.00"
L	990.5 mm.	39.00"	C	263.5 mm.	10.37"	Weight	71.67 Kg	158.0 Lbs
			D	100.0 mm.	3.94"			

132-1028

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	4	
W	360.0 mm.	14.17"	B	100.0 mm.	3.94"	Bolt	25.4 mm.	1.00"
L	990.5 mm.	39.00"	C	263.5 mm.	10.37"	Weight	84.37 Kg	186.0 Lbs
			D	100.0 mm.	3.94"			

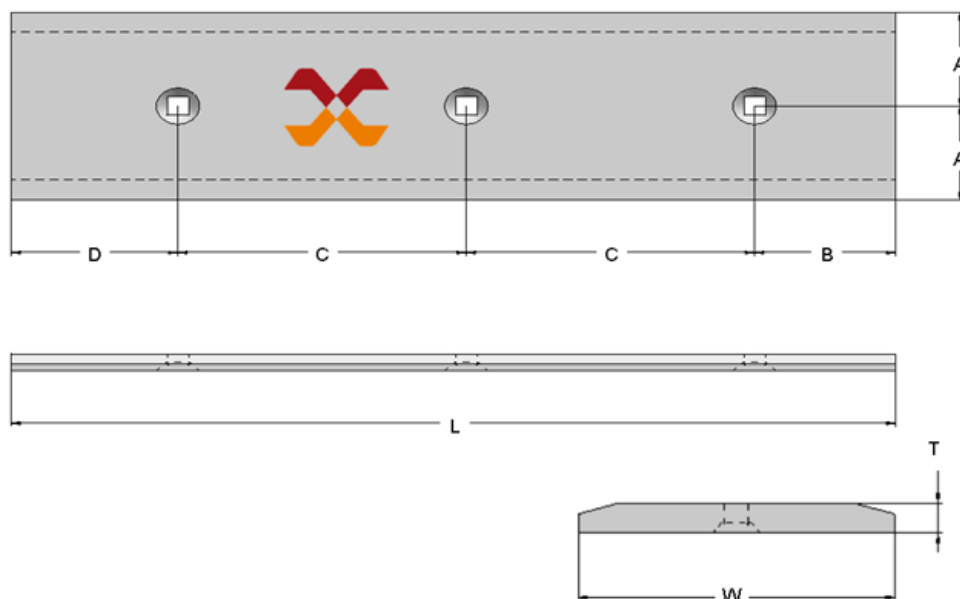

1U2408


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	158.0 mm.	6.22"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1017.5 mm.	40.10"	C	345.0 mm.	13.58"	Weight	73.94 Kg	163.0 Lbs
			D	169.5 mm.	6.67"			

1U02414

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	172.0 mm.	6.77"	Bolt	25.4 mm.	1.00"
L	1044.0 mm.	41.10"	C	350.0 mm.	13.78"	Weight	75.59 Kg	166.65 Lbs
			D	172.0 mm.	6.77"			

132-1030

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	172.0 mm.	6.77"	Bolt	25.4 mm.	1.00"
L	1044.0 mm.	41.10"	C	350.0 mm.	13.78"	Weight	89.36 Kg	197.0 Lbs
			D	172.0 mm.	6.77"			

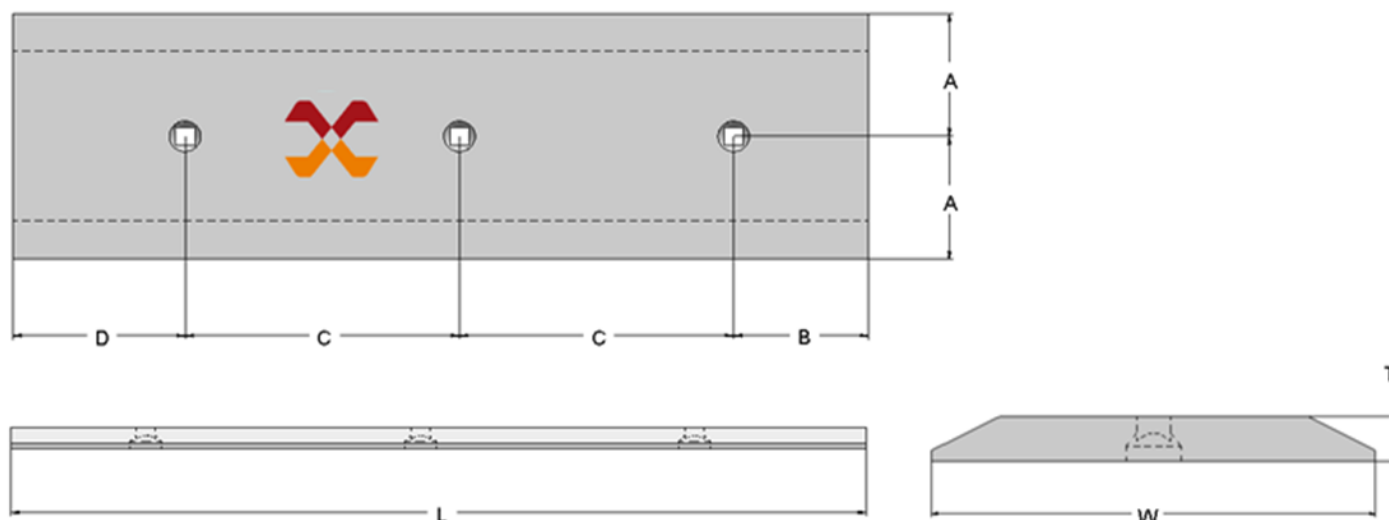

1U2411


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	30.0 mm.	1.18"
W	360.0 mm.	14.17"	B	174.0 mm.	6.85"	Bolt	360.0 mm.	14.17"
L	1056.0 mm.	41.60"	C	354.0 mm.	13.94"	Weight	1056.0 mm.	41.60"
			D	174.0 mm.	6.85"			

1U0600

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	172.0 mm.	6.77"	Bolt	25.4 mm.	1.00"
L	1079.0 mm.	42.50"	C	350.0 mm.	13.78"	Weight	78.47 Kg	173.0 Lbs
			D	207.0 mm.	8.15"			

1U0591

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	181.0 mm.	7.13"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1106.0 mm.	43.50"	C	368.0 mm.	14.49"	Weight	80.29 Kg	177.0 Lbs
			D	189.0 mm.	7.44"			

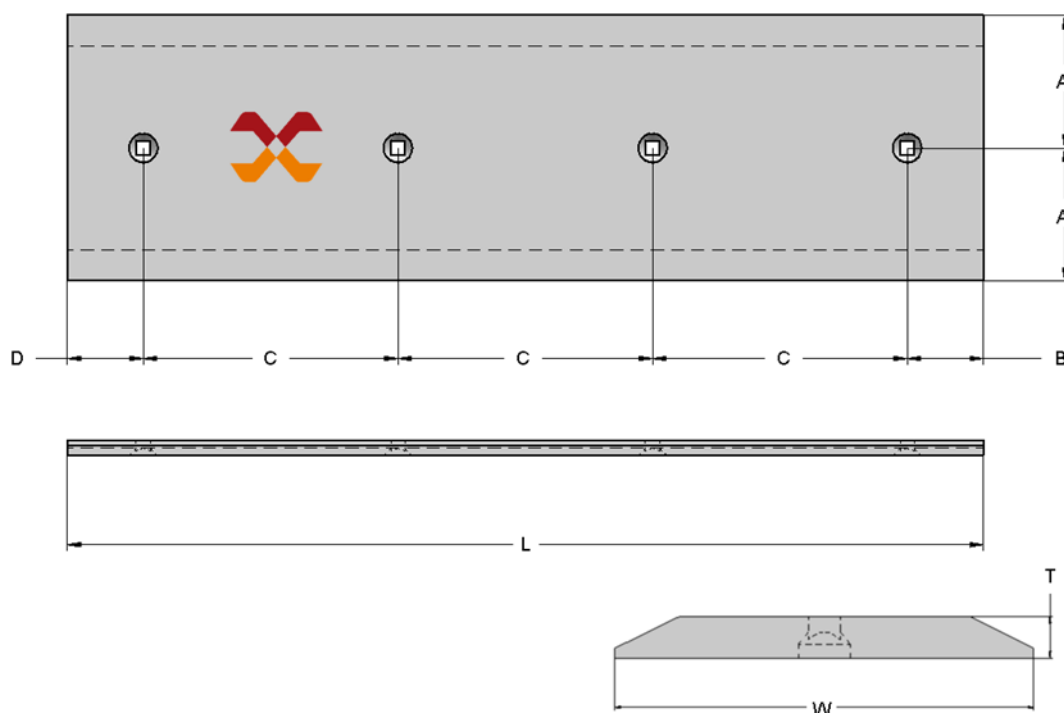


1U1471

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	4	
W	360.0 mm.	14.17"	B	132.0 mm.	5.20"	Bolt	25.4 mm.	1.00"
L	1121.1 mm.	44.10"	C	269.7 mm.	10.62"	Weight	79.38 Kg	175.0 Lbs
			D	180.0 mm.	7.90"			

1U1473

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	4	
W	360.0 mm.	14.17"	B	137.0 mm.	5.39"	Bolt	25.4 mm.	1.00"
L	1140.2 mm.	44.90"	C	279.4 mm.	11.00"	Weight	86.18 Kg	190.0 Lbs
			D	165.0 mm.	6.50"			

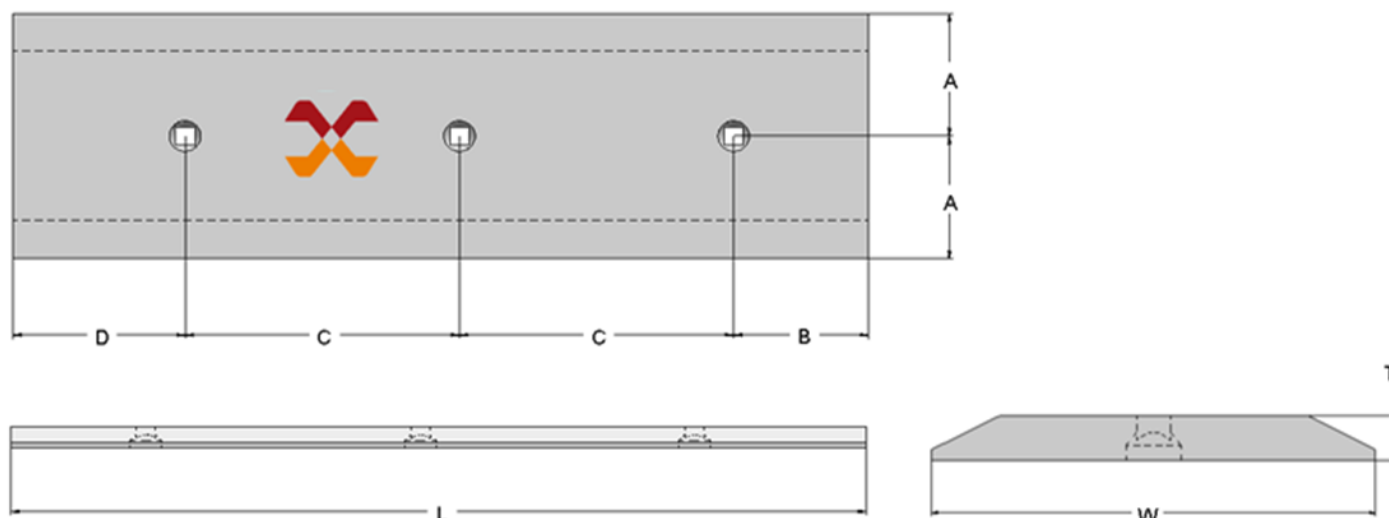

1U2412


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	182.0 mm.	7.17"	Bolt	25.4 mm.	1.00"
L	1148.0 mm.	45.20"	C	370.0 mm.	14.57"	Weight	83.01 Kg	183.0 Lbs
			D	226.0 mm.	8.90"			

132-1031

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	182.0 mm.	7.17"	Bolt	25.4 mm.	1.00"
L	1148.0 mm.	45.20"	C	370.0 mm.	14.57"	Weight	97.98 Kg	216.0 Lbs
			D	226.0 mm.	8.90"			

1U2413

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	184.0 mm.	7.24"	Bolt	25.4 mm.	1.00"
L	1162.0 mm.	45.70"	C	374.0 mm.	14.72"	Weight	83.91 Kg	185.0 Lbs
			D	230.0 mm.	9.06"			

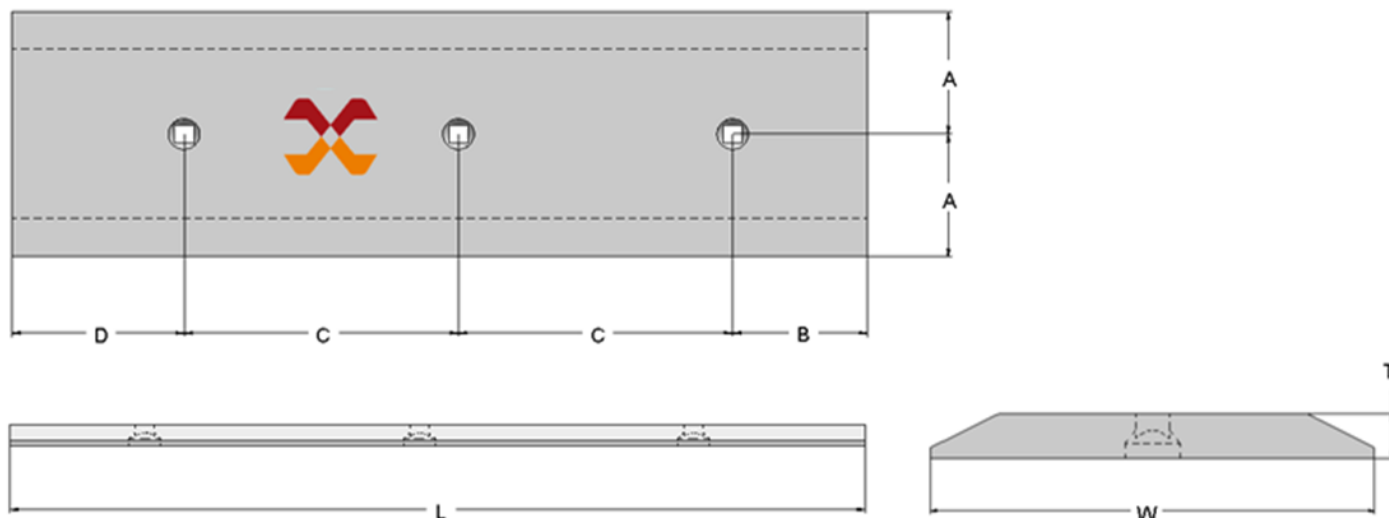

132-1032


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	184.0 mm.	7.24"	Bolt	25.4 mm.	1.00"
L	1162.0 mm.	45.70"	C	374.0 mm.	14.72"	Weight	99.34 Kg	219.0 Lbs
			D	230.0 mm.	9.06"			

1U2409

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	197.0 mm.	7.76"	Bolt	25.4 mm.	1.00"
L	1205.0 mm.	47.40"	C	400.0 mm.	14.75"	Weight	97.07 Kg	214.0 Lbs
			D	208.0 mm.	8.19"			

1U0601

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	191.0 mm.	7.52"	Bolt	25.4 mm.	1.00"
L	1210.0 mm.	47.64"	C	388.0 mm.	15.28"	Weight	87.54 Kg	193.0 Lbs
			D	243.0 mm.	9.56"			

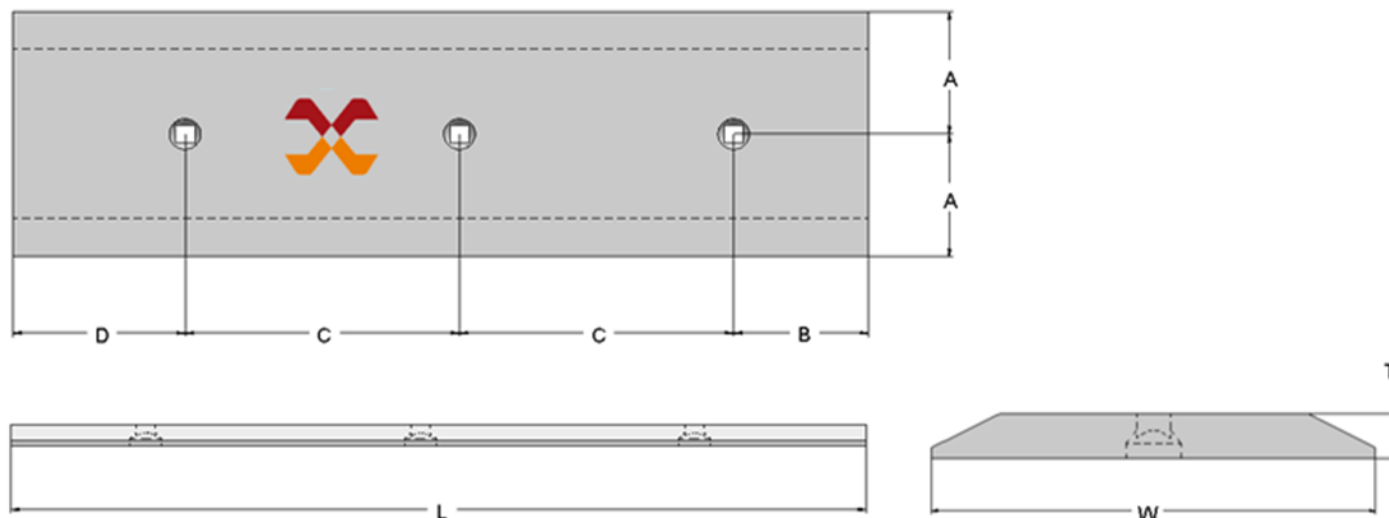

132-1034


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	191.0 mm.	7.52"	Bolt	25.4 mm.	1.00"
L	1210.0 mm.	47.64"	C	388.0 mm.	15.28"	Weight	102.97 Kg	227.0 Lbs
			D	243.0 mm.	9.56"			

1U2407

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	198.5 mm.	7.81"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1222.5 mm.	48.10"	C	403.0 mm.	15.87"	Weight	90.04 Kg	198.50 Lbs
			D	218.0 mm.	8.58"			

1U2406

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	198.5 mm.	7.81"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1230.5 mm.	48.40"	C	403.0 mm.	15.86"	Weight	90.40 Kg	199.40 Lbs
			D	226.0 mm.	8.89"			

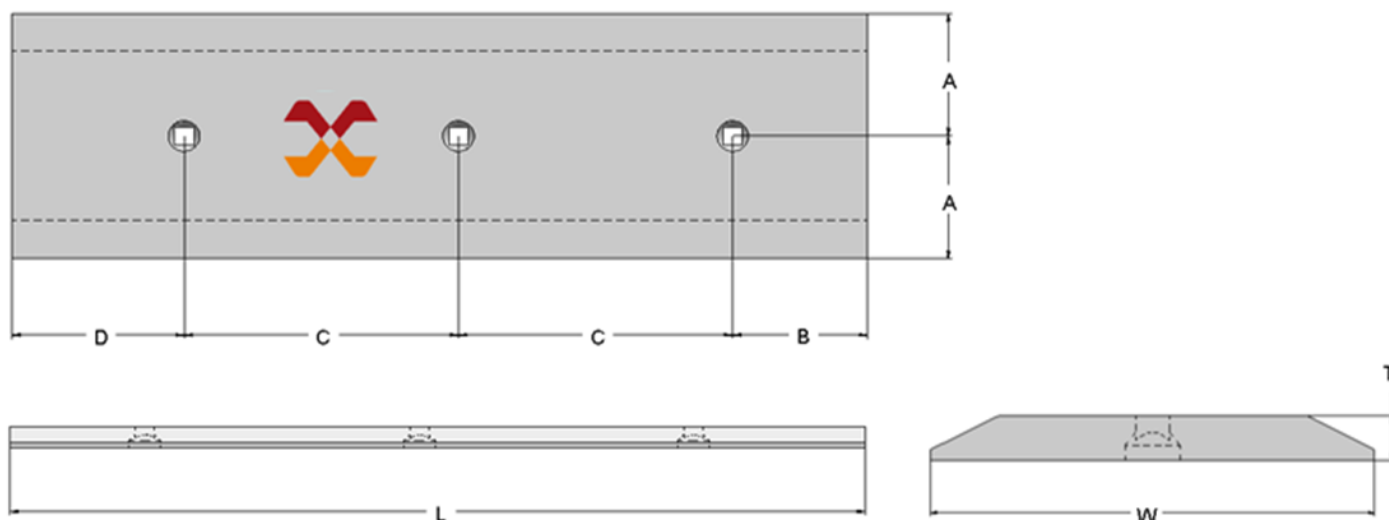

139-9230


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	203.2 mm.	8.00"	Bolt	25.4 mm.	1.00"
L	1280.2 mm.	50.40"	C	414.0 mm.	16.31"	Weight	92.99 Kg	205.0 Lbs
			D	249.0 mm.	9.80"			

1U0593

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	211.0 mm.	8.31"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1319.0 mm.	51.93"	C	429.0 mm.	16.88"	Weight	96.93 Kg	213.70 Lbs
			D	250.0 mm.	9.84"			

1U1909

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	203.3 mm.	8.00"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1263.6 mm.	49.75"	C	412.7 mm.	16.25"	Weight	93.12 Kg	205.30 Lbs
			D	234.9 mm.	9.25"			

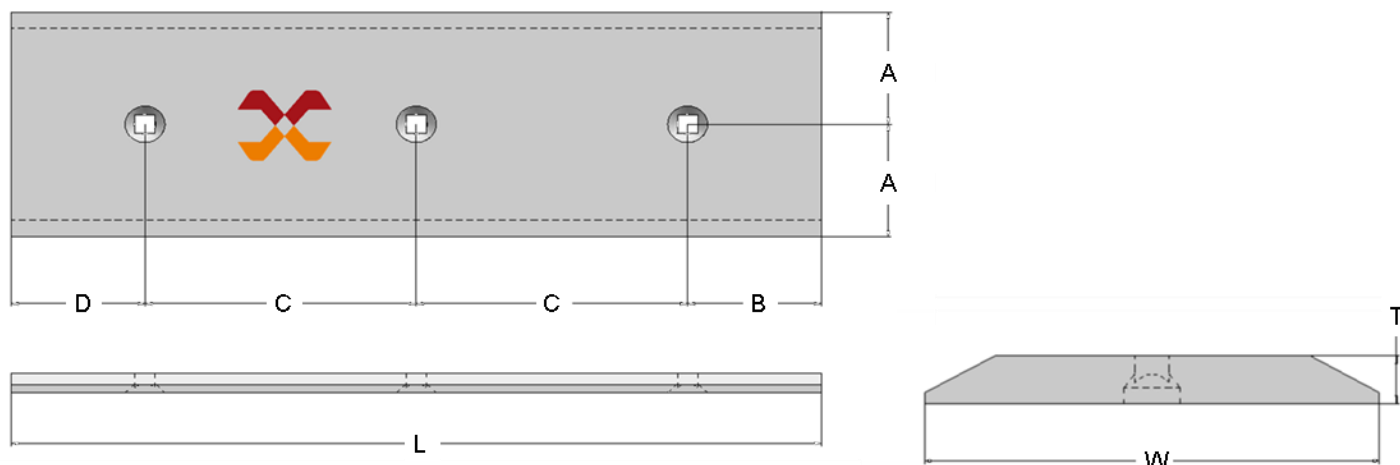

100-6668


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	3	
W	360.0 mm.	14.17"	B	222.5 mm.	8.75"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1399.5 mm.	55.10"	C	452.0 mm.	17.80"	Weight	102.10 Kg	225.10 Lbs
			D	273.0 mm.	10.75"			

4T5273

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	203.2 mm.	8.00"	Qty	3	
W	406.0 mm.	16.00"	B	221.0 mm.	8.70"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1337.0 mm.	52.63"	C	447.5 mm.	17.62"	Weight	132.99 Kg	293.20 Lbs
			D	221.0 mm.	8.70"			

9W1375

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	203.2 mm.	8.00"	Qty	3	
W	406.0 mm.	16.00"	B	251.0 mm.	9.88"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1524.0 mm.	60.00"	C	511.0 mm.	20.12"	Weight	132.99 Kg	293.20 Lbs
			D	251.0 mm.	9.88"			

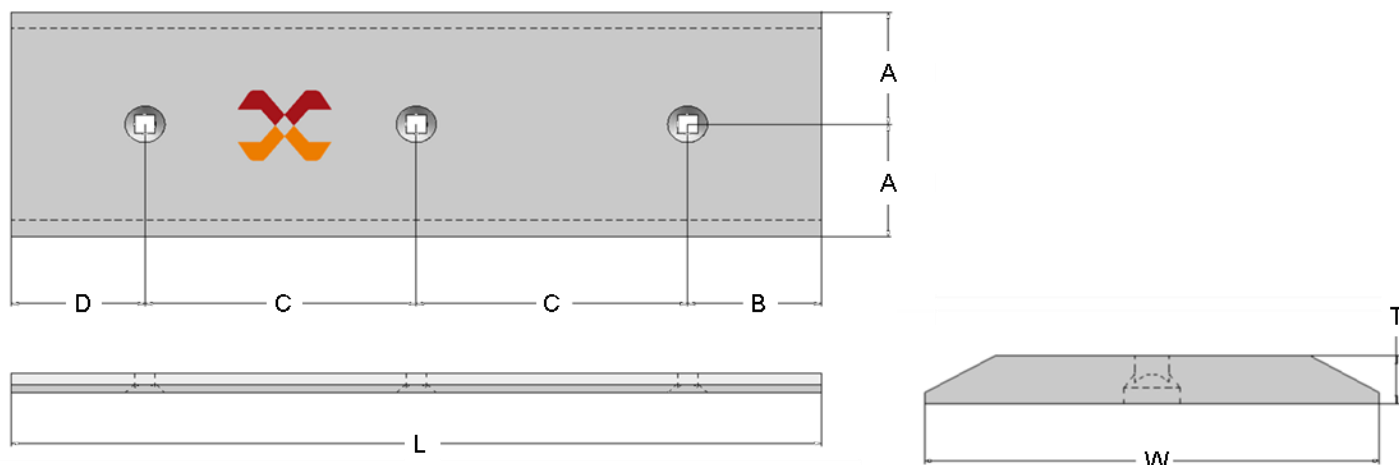

100-4045


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	203.2 mm.	8.00"	Qty	3	
W	406.0 mm.	16.00"	B	198.5 mm.	7.81"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1230.5 mm.	48.44"	C	403.0 mm.	15.86"	Weight	129.05 Kg	254.50 Lbs
			D	226.0 mm.	8.89"			

100-4046

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	203.2 mm.	8.00"	Qty	3	
W	406.0 mm.	16.00"	B	211.0 mm.	8.31"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1319.0 mm.	51.93"	C	429.0 mm.	16.88"	Weight	138.48 Kg	305.30 Lbs
			D	250.0 mm.	9.84"			

1U0762

Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	203.2 mm.	8.00"	Qty	3	
W	406.0 mm.	16.00"	B	233.0 mm.	9.17"	Bolt	31.7 mm.	1.25" (1-1/4")
L	1406.0 mm.	55.35"	C	470.0 mm.	18.50"	Weight	137.89 Kg	304.00 Lbs
			D	233.0 mm.	9.17"			

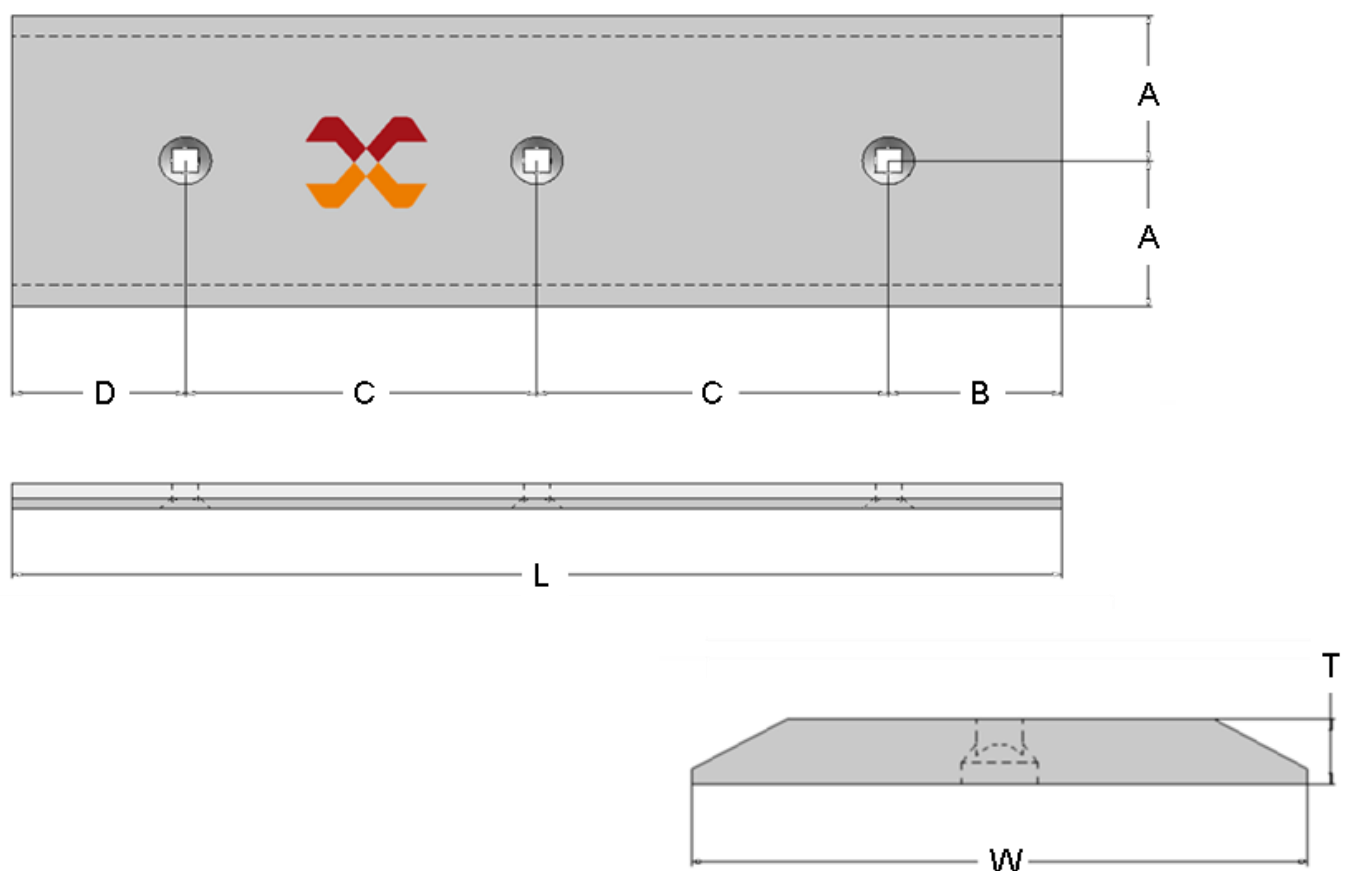

109-9212


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight	
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso	
T	35.0 mm.	1.37"	A	203.2 mm.	8.00"	Qty	3
W	406.0 mm.	16.00"	B	240.5 mm.	9.46"	Bolt	31.7 mm. 1.25" (1-1/4")
L	1451.0 mm.	57.12"	C	485.0 mm.	19.09"	Weight	143.79 Kg 317.00 Lbs
			D	240.5 mm.	9.46"		

104-5841


Dimensions - Center Bolt-On Edge			Hole Spacing			Holes & Weight	
Dimensiones - Subcuchilla Central			Distancia entre agujeros			Taladros y Peso	
T	35.0 mm.	1.37"	A	203.2 mm.	8.00"	Qty	3
W	406.0 mm.	16.00"	B	257.0 mm.	10.12"	Bolt	31.7 mm. 1.25" (1-1/4")
L	1587.0 mm.	62.50"	C	523.0 mm.	20.59"	Weight	157.17 Kg 346.5 Lbs
			D	284.0 mm.	11.18"		

Corner Guard System End Bits. Subcantонера de protección - Lateral.


TYPE - TIPO 3




TYPE - TIPO 4




TYPE - TIPO 3



TYPE - TIPO 4




Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Type	Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		Tipo	
1U1896	30.0 mm	1.18"	412.0 mm	16.25"	158.8 mm	6.25"	2	1"	4	76
4T8091	25.0 mm	1.00"	343.0 mm	13.50"	158.8 mm	6.25"	2	1"	2	76
4T8101	30.0 mm	1.18"	496.0 mm	19.52"	170.0 mm	6.69"	3	1"	1	77
132-1033	35.0 mm	1.37"	496.0 mm	19.52"	170.0 mm	6.69"	3	1"	1	77
109-3571	30.0 mm	1.18"	496.0 mm	19.52"	170.0 mm	6.69"	3	1-1/4"	1	77
1U1898	35.0 mm	1.37"	576.0 mm	22.62"	170.0 mm	6.69"	3	1"	2	78
1U1897	35.0 mm	1.37"	600.0 mm	23.62"	200.0 mm	7.88"	3	1-1/4"	2	78
3G6395	35.0 mm	1.37"	510.0 mm	20.12"	200.0 mm	7.88"	3	1-1/4"	1	79
100-4044	40.0 mm	1.57"	556.0 mm	21.88"	200.0 mm	7.88"	3	1-1/4"	1	79
106-9290	35.0 mm	1.37"	510.0 mm	20.12"	227.0 mm	8.93"	3	1-1/4"	1	79
1U0764	40.0 mm	1.57"	670.0 mm	26.38"	265.0 mm	10.43"	3	1-1/4"	2	80
1U0761	40.0 mm	1.57"	558.0 mm	22.00"	265.0 mm	10.43"	3	1-1/4"	1	80
100-4043	45.0 mm	1.77"	558.0 mm	22.00"	265.0 mm	10.43"	3	1-1/4"	1	81
136-8759	50.0 mm	1.96"	558.0 mm	22.00"	265.0 mm	10.43"	3	1-1/4"	1	81

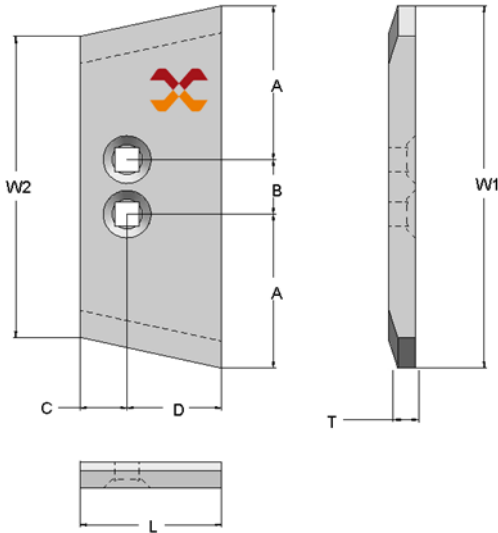


1U1896

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantonera			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	175.0 mm.	6.88"	Qty	2	
W 1	412.0 mm.	16.25"	B	62.0 mm.	2.43"	Bolt	25.4 mm.	1.00"
W2	343.0 mm.	13.50"	C	53.8 mm.	2.12"	Weight	12.61 Kg	27.80 Lbs
L	158.8 mm.	6.25"	D	105.0 mm.	4.13"			

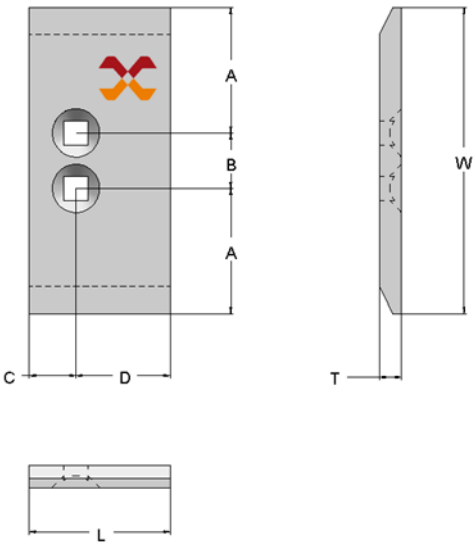

4T8091

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantonera			Distancia entre agujeros			Taladros y Peso		
T	25.0 mm.	1.00"	A	140.5 mm.	5.55"	Qty	2	
W	343.0 mm.	13.50"	B	62.0 mm.	2.43"	Bolt	25.4 mm.	1.00"
L	158.8 mm.	6.25"	C	53.8 mm.	2.12"	Weight	9.34 Kg	20.60 Lbs
			D	105.0 mm.	4.13"			

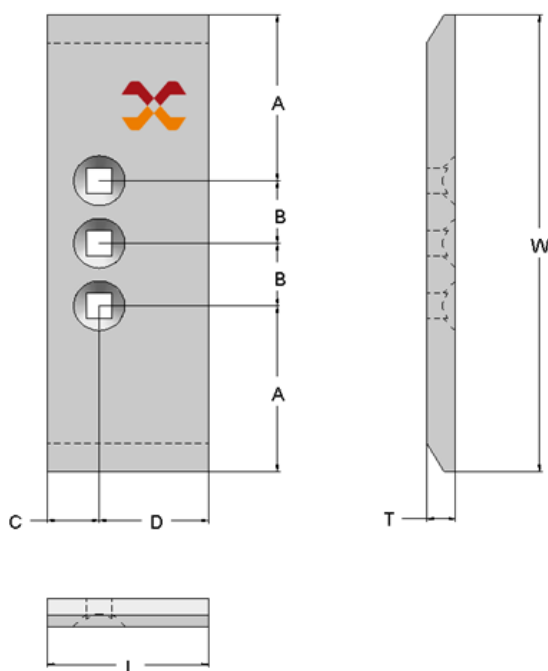

4T8101


Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantонера			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.12"	Qty	3	
W	496.0 mm.	19.52"	B	68.0 mm.	2.67"	Bolt	25.4 mm.	1.00"
L	170.0 mm.	6.69"	C	55.0 mm.	2.16"	Weight	17.10 Kg	37.00 Lbs
			D	115.0 mm.	4.52"			

132-1033

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantонера			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.12"	Qty	3	
W	496.0 mm.	19.52"	B	68.0 mm.	2.67"	Bolt	25.4 mm.	1.00"
L	170.0 mm.	6.69"	C	55.0 mm.	2.16"	Weight	19.96 Kg	44.00 Lbs
			D	115.0 mm.	4.52"			

109-3571

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantонера			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.12"	Qty	3	
W	496.0 mm.	19.52"	B	68.0 mm.	2.67"	Bolt	31.7 mm.	1.25" (1-1/4")
L	170.0 mm.	6.69"	C	55.0 mm.	2.16"	Weight	19.96 Kg	44.00 Lbs
			D	115.0 mm.	4.52"			

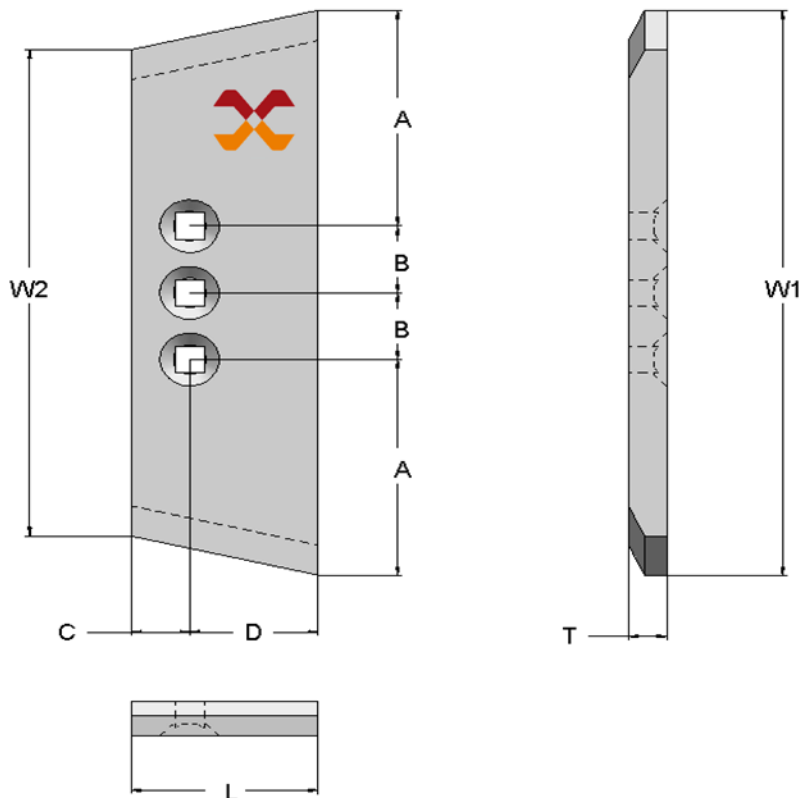


1U1898

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantenera			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	220.0 mm.	8.66"	Qty	3	
W 1	576.0 mm.	22.62"	B	68.0 mm.	2.67"	Bolt	25.4 mm.	1.00"
W2	496.0 mm.	19.52"	C	55.0 mm.	2.16"	Weight	22.23 Kg	49.00 Lbs
L	170.0 mm.	6.69"	D	115.0 mm.	4.52"			

1U1897

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantenera			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	225.0 mm.	8.85"	Qty	3	
W 1	600.0 mm.	23.62"	B	75.0 mm.	2.95"	Bolt	31.7 mm.	1.25" (1-1/4")
W2	510.0 mm.	20.12"	C	53.7 mm.	2.12"	Weight	27.90 Kg	61.50 Lbs
L	200.0 mm.	7.88"	D	146.3 mm.	5.76"			

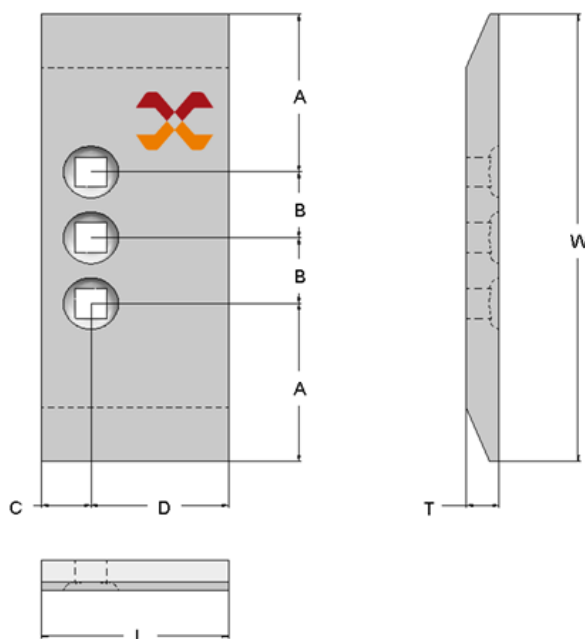

3G6395


Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantenera			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.12"	Qty	3	
W	510.0 mm.	20.12"	B	75.0 mm.	2.95"	Bolt	31.7 mm.	1.25" (1-1/4")
L	200.0 mm.	7.88"	C	53.7 mm.	2.12"	Weight	24.81 Kg	54.70 Lbs
			D	146.3 mm.	5.76"			

100-4044

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantenera			Distancia entre agujeros			Taladros y Peso		
T	40.0 mm.	1.57"	A	203.0 mm.	7.99"	Qty	3	
W	556.0 mm.	21.88"	B	75.0 mm.	2.95"	Bolt	31.7 mm.	1.25" (1-1/4")
L	200.0 mm.	7.88"	C	53.7 mm.	2.12"	Weight	32.21 Kg	71.00 Lbs
			D	146.3 mm.	5.76"			


106-9290

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantenera			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.12"	Qty	3	
W	510.0 mm.	20.12"	B	75.0 mm.	2.95"	Bolt	31.7 mm.	1.25" (1-1/4")
L	227.0 mm.	8.93"	C	53.7 mm.	2.12"	Weight	24.81 Kg	54.70 Lbs
			D	173.3 mm.	6.82"			

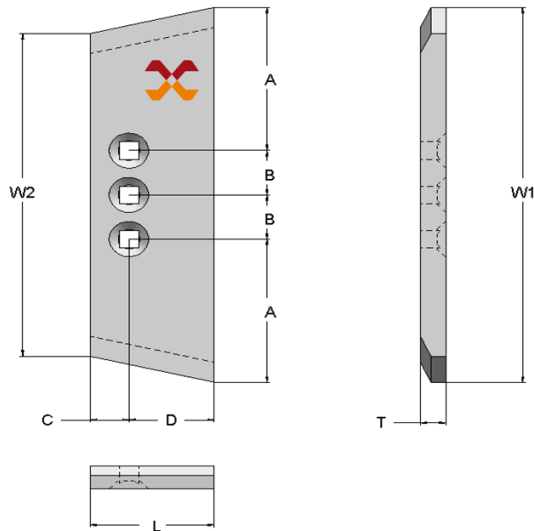


1U0764

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantонера			Distancia entre agujeros			Taladros y Peso		
T	40.0 mm.	1.62"	A	256.0 mm.	10.07"	Qty	3	
W 1	670.0 mm.	26.38"	B	79.0 mm.	3.12"	Bolt	31.7 mm.	1.25" (1-1/4")
W2	558.0 mm.	22.00"	C	90.0 mm.	3.50"	Weight	46.95 Kg	103.50 Lbs
L	265.0 mm.	10.43"	D	175.0 mm.	6.88"			

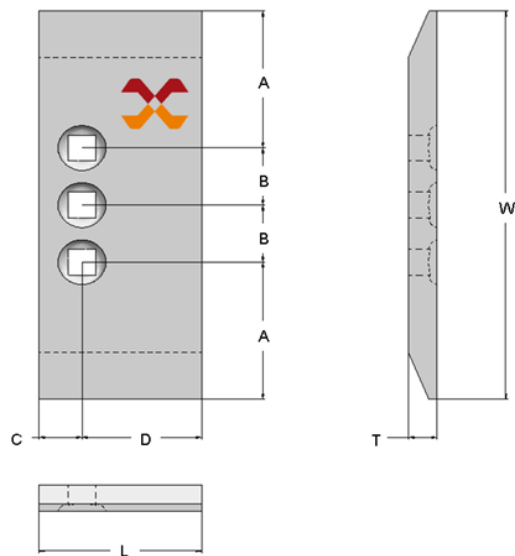

1U0761

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantонера			Distancia entre agujeros			Taladros y Peso		
T	40.0 mm.	1.62"	A	200.0 mm.	7.88"	Qty	3	
W	558.0 mm.	22.00"	B	79.0 mm.	3.12"	Bolt	31.7 mm.	1.25" (1-1/4")
L	265.0 mm.	10.43"	C	90.0 mm.	3.50"	Weight	42.77 Kg	94.30 Lbs
			D	175.0 mm.	6.88"			

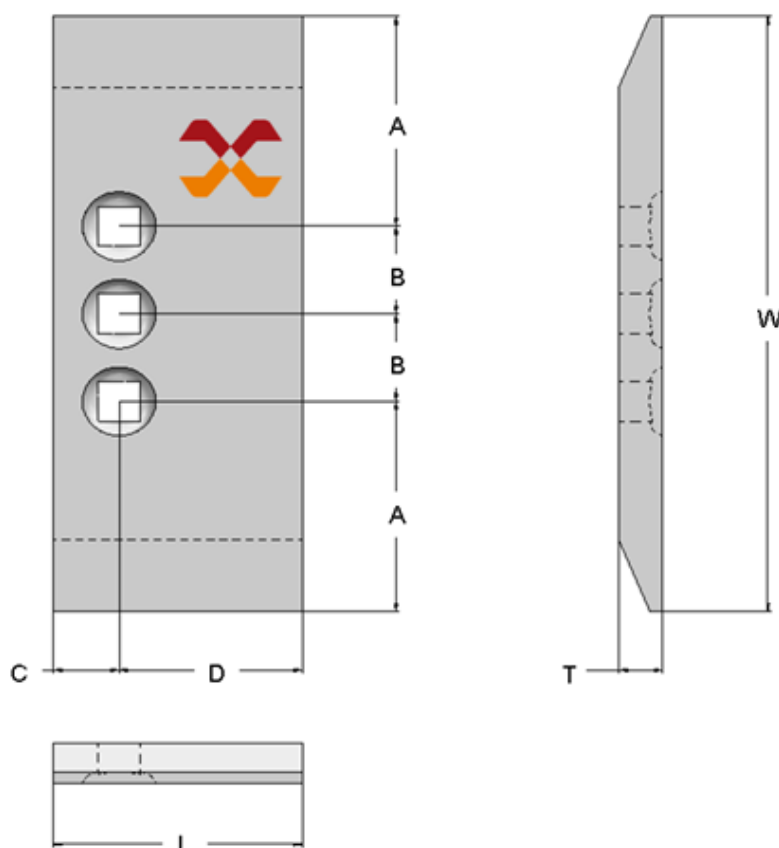


100-4043

Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantонера			Distancia entre agujeros			Taladros y Peso		
T	45.0 mm.	1.77"	A	200.0 mm.	7.88"	Qty	3	
W	558.0 mm.	22.00"	B	79.0 mm.	3.12"	Bolt	31.7 mm.	1.25" (1-1/4")
L	265.0 mm.	10.43"	C	90.0 mm.	3.50"	Weight	45.81 Kg	101.00 Lbs
			D	175.0 mm.	6.88"			

136-8759


Dimensions - End Bolt-On Edge			Hole Spacing			Holes & Weight		
Dimensiones - Subcantонера			Distancia entre agujeros			Taladros y Peso		
T	50.0 mm.	1.96"	A	200.0 mm.	7.88"	Qty	3	
W	558.0 mm.	22.00"	B	79.0 mm.	3.12"	Bolt	31.7 mm.	1.25" (1-1/4")
L	265.0 mm.	10.43"	C	90.0 mm.	3.50"	Weight	51.94 Kg	114.50 Lbs
			D	175.0 mm.	6.88"			

Bolt-On Edge Segments. Segmentos.

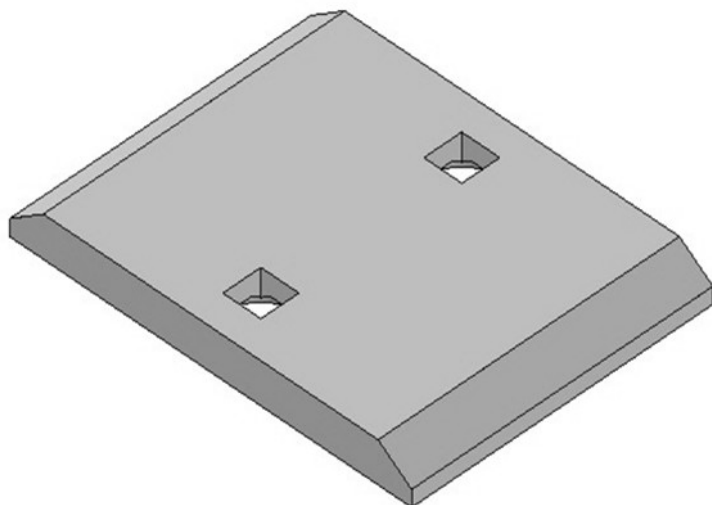


Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		
128-2873	19.0 mm	0.75"	203.2 mm	8.00"	263.5 mm	10.37"	2	3/4"	84
128-2872	19.0 mm	0.75"	203.2 mm	8.00"	323.0 mm	12.71"	2	3/4"	84
4T6691	25.0 mm	1.00"	280.0 mm	11.00"	175.0 mm	6.89"	2	1"	84
4T6692	25.0 mm	1.00"	280.0 mm	11.00"	195.0 mm	7.68"	2	1"	85
4T6693	25.0 mm	1.00"	280.0 mm	11.00"	210.0 mm	8.26"	2	1"	85
132-1036	35.0 mm	1.37"	280.0 mm	11.00"	210.0 mm	8.26"	2	1"	85
4T6694	25.0 mm	1.00"	280.0 mm	11.00"	225.0 mm	8.86"	2	1"	86
132-1035	35.0 mm	1.37"	280.0 mm	11.00"	225.0 mm	8.86"	2	1"	86
8E4569	25.0 mm	1.00"	280.0 mm	11.00"	247.0 mm	9.72"	2	1"	86
4T6695	25.0 mm	1.00"	280.0 mm	11.00"	265.0 mm	10.43"	2	1"	87
132-1037	35.0 mm	1.37"	280.0 mm	11.00"	265.0 mm	10.43"	2	1"	87
132-4715	25.0 mm	1.00"	304.8 mm	12.00"	278.0 mm	10.94"	2	1"	87
135-9294	40.0 mm	1.57"	330.0 mm	13.00"	300.0 mm	11.81"	2	1-1/4"	88
4T6696	30.0 mm	1.18"	360.0 mm	14.17"	190.0 mm	7.48"	2	1-1/4"	88
140-6865	35.0 mm	1.37"	360.0 mm	14.17"	190.0 mm	7.48"	2	1-1/4"	88
4T6697	30.0 mm	1.18"	360.0 mm	14.17"	210.0 mm	8.27"	2	1-1/4"	89

Bolt-On Edge Segments. Segmentos.

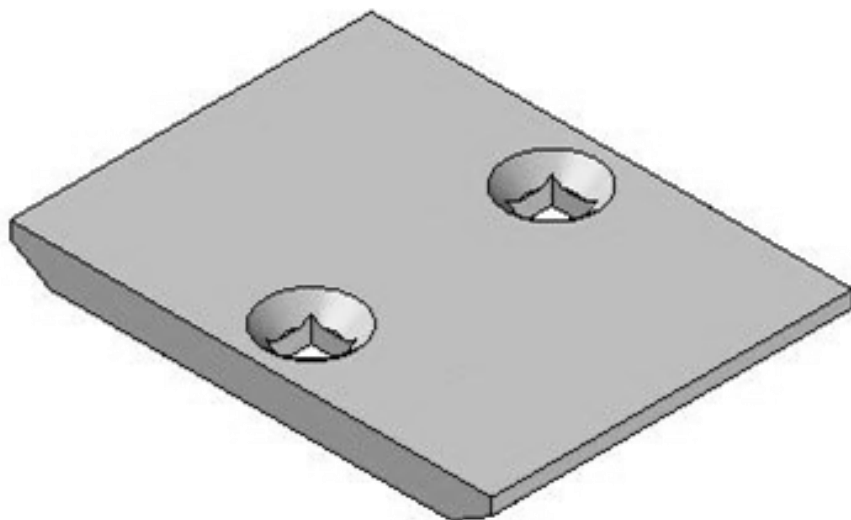

Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		
140-6866	35.0 mm	1.37"	360.0 mm	14.17"	210.0 mm	8.27"	2	1-1/4"	89
4T6698	30.0 mm	1.18"	360.0 mm	14.17"	240.0 mm	9.45"	2	1-1/4"	89
140-6867	35.0 mm	1.37"	360.0 mm	14.17"	240.0 mm	9.45"	2	1-1/4"	90
100-6664	30.0 mm	1.18"	360.0 mm	14.17"	255.0 mm	10.04"	2	1-1/4"	90
140-6869	35.0 mm	1.37"	360.0 mm	14.17"	255.0 mm	10.04"	2	1-1/4"	90
4T3015	30.0 mm	1.18"	360.0 mm	14.17"	256.0 mm	10.07"	2	1-1/4"	91
140-6862	35.0 mm	1.37"	360.0 mm	14.17"	256.0 mm	10.07"	2	1-1/4"	91
107-8582	45.0 mm	1.77"	360.0 mm	14.17"	256.0 mm	10.07"	2	1-1/4"	91
4T6699	30.0 mm	1.18"	360.0 mm	14.17"	270.0 mm	10.62"	2	1-1/4"	92
140-6868	35.0 mm	1.37"	360.0 mm	14.17"	270.0 mm	10.62"	2	1-1/4"	92
4T6700	30.0 mm	1.18"	360.0 mm	14.17"	290.0 mm	11.42"	2	1-1/4"	92
107-8580	45.0 mm	1.77"	360.0 mm	14.17"	290.0 mm	11.42"	2	1-1/4"	93
100-6666	30.0 mm	1.18"	360.0 mm	14.17"	293.0 mm	11.53"	2	1-1/4"	93
140-6870	35.0 mm	1.37"	360.0 mm	14.17"	293.0 mm	11.53"	2	1-1/4"	93
109-9019	30.0 mm	1.18"	360.0 mm	14.17"	315.0 mm	12.40"	2	1-1/4"	94
135-8219	45.0 mm	1.77"	360.0 mm	14.17"	315.0 mm	12.40"	2	1-1/4"	94

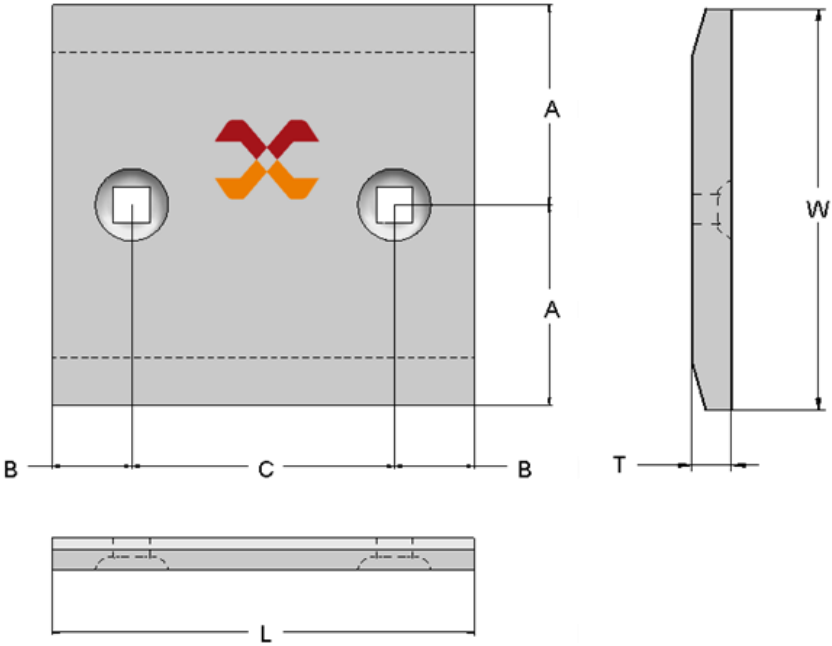

128-2873


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	101.6 mm.	4.00"	Qty	2	
W	203.2 mm.	8.00"	B	49.2 mm.	1.93"	Bolt	19.0 mm.	0.75" (3/4")
L	263.5 mm.	10.37"	C	165.1 mm.	6.50"	Weight	7.26 Kg	16.0 Lbs

128-2872

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	19.0 mm.	0.75"	A	101.6 mm.	4.00"	Qty	2	
W	203.2 mm.	8.00"	B	50.0 mm.	1.97"	Bolt	19.0 mm.	0.75" (3/4")
L	323.0 mm.	12.71"	C	223.0 mm.	8.77"	Weight	9.07 Kg	20.00 Lbs

4T6691

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	175.0 mm.	6.89"	C	105.0 mm.	4.13"	Weight	9.07 Kg	20.00 Lbs

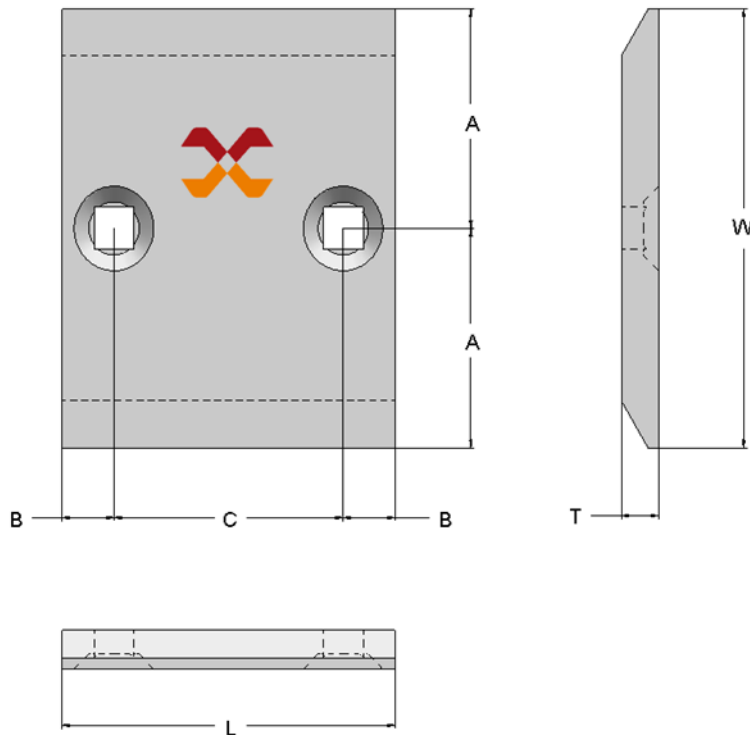

4T6692


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	195.0 mm.	7.68"	C	125.0 mm.	4.92"	Weight	10.10 Kg	22.28 Lbs

4T6693

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 Mm.	1.00"
L	210.0 mm.	8.26"	C	140.0 mm.	5.51"	Weight	10.16 Kg	22.40 Lbs

132-1036

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	210.0 mm.	8.26"	C	140.0 mm.	5.51"	Weight	14.51 Kg	32.00 Lbs

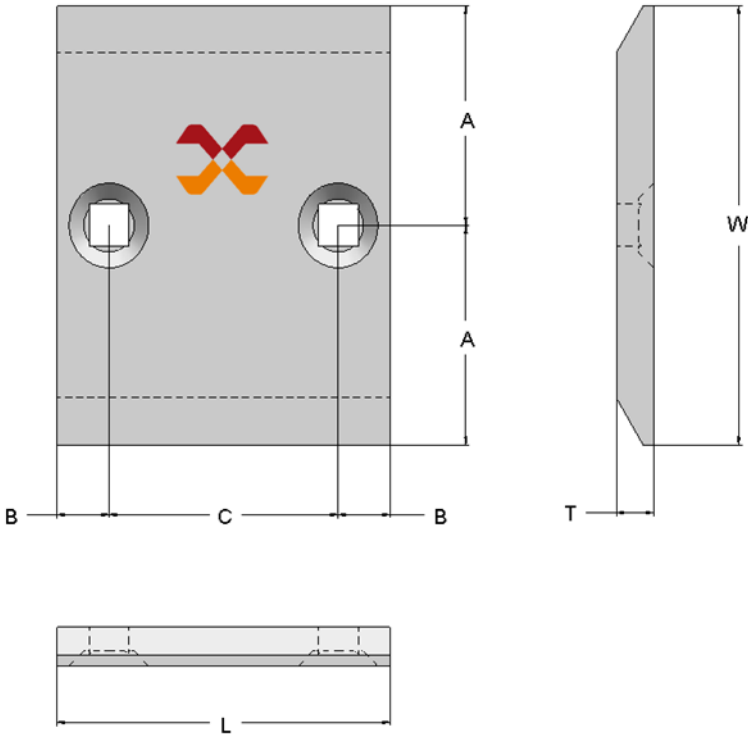

4T6694


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	225.0 mm.	8.86"	C	155.0 mm.	6.10"	Weight	10.89 Kg	24.0 Lbs

132-1035

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	225.0 mm.	8.86"	C	155.0 mm.	6.10"	Weight	14.97 Kg	33.0 Lbs

8E4569

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	247.0 mm.	9.72"	C	177.0 mm.	6.96"	Weight	11.79 Kg	26.0 Lbs

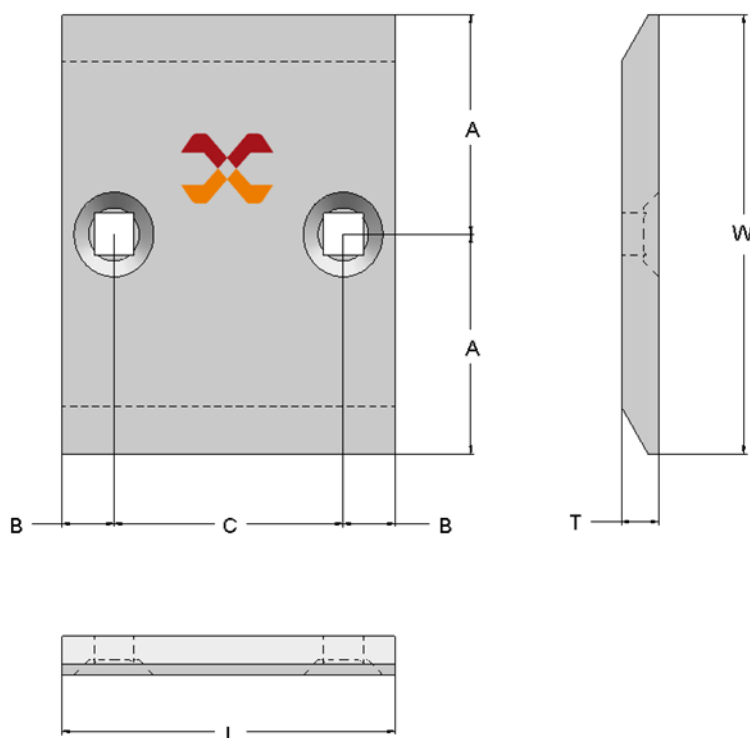

4T6695


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	265.0 mm.	10.43"	C	195.0 mm.	7.68"	Weight	12.70 Kg	28.0 Lbs

132-1037

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	140.0 mm.	5.50"	Qty	2	
W	280.0 mm.	11.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	265.0 mm.	10.43"	C	195.0 mm.	7.68"	Weight	17.69 Kg	39.0 Lbs

132-4715

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	152.4 mm.	6.00"	Qty	2	
W	304.8 mm.	12.00"	B	35.0 mm.	1.38"	Bolt	25.4 mm.	1.00"
L	278.0 mm.	10.94"	C	208.0 mm.	8.19"	Weight	21.7 Kg	48.0 Lbs

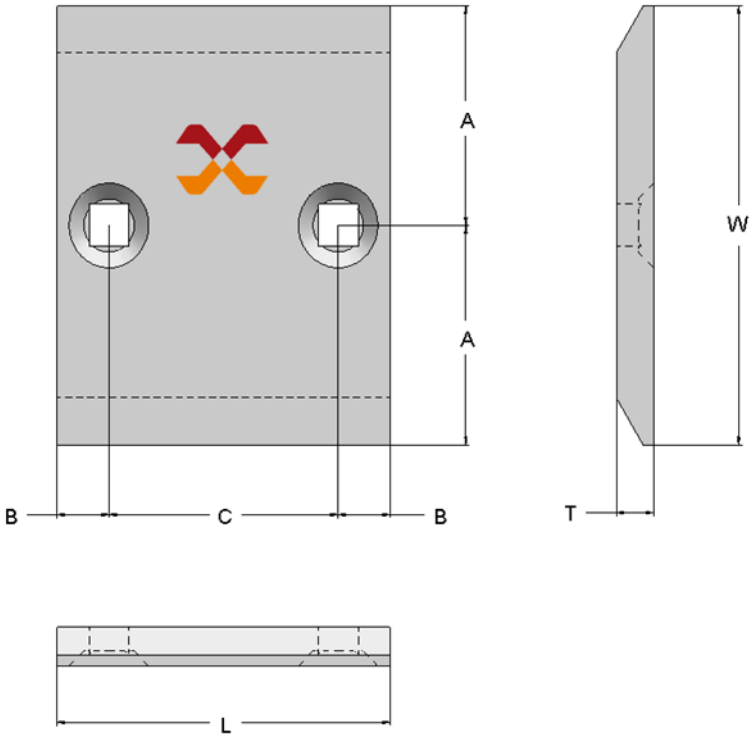

135-9294


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	40.0 mm.	1.57"	A	165.0 mm.	6.50"	Qty	2	
W	330.0 mm.	13.00"	B	90.0 mm.	3.54"	Bolt	31.7 mm.	1.25" (1-1/4")
L	300.0 mm.	11.81"	C	120.0 mm.	4.72"	Weight	27.35 Kg	60.30 Lbs

4T6696

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	50.0 mm.	1.97"	Bolt	31.7 mm.	1.25" (1-1/4")
L	190.0 mm.	7.48"	C	90.0 mm.	3.54"	Weight	13.61 Kg	30.00 Lbs

140-6865

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	50.0 mm.	1.97"	Bolt	31.7 mm.	1.25" (1-1/4")
L	190.0 mm.	7.48"	C	90.0 mm.	3.54"	Weight	15.87 Kg	35.00 Lbs

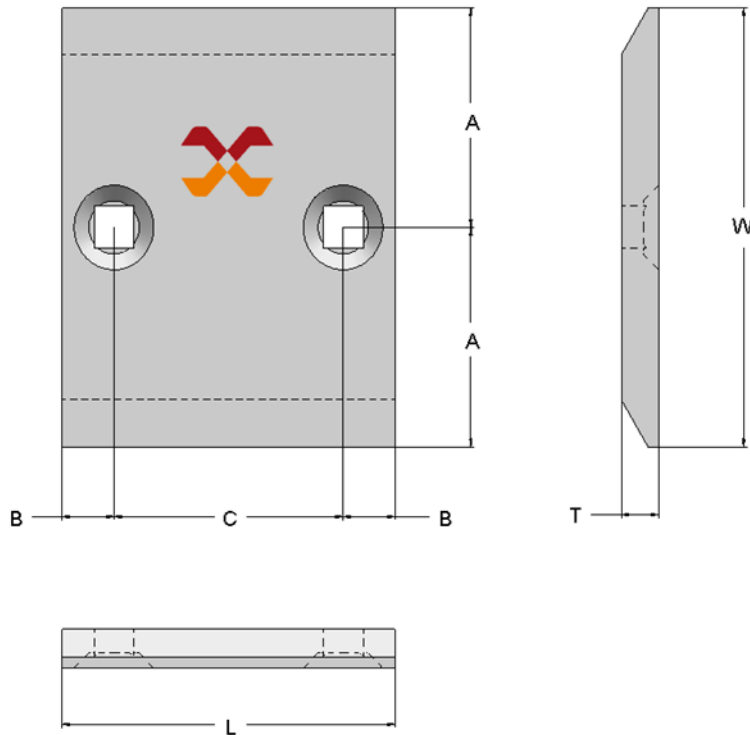

4T6697


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	45.0 mm.	1.77"	Bolt	31.7 mm.	1.25" (1-1/4")
L	210.0 mm.	8.27"	C	120.0 mm.	4.72"	Weight	14.88 Kg	32.80 Lbs

140-6866

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	45.0 mm.	1.77"	Bolt	31.7 mm.	1.25" (1-1/4")
L	210.0 mm.	8.27"	C	120.0 mm.	4.72"	Weight	17.36 Kg	38.26 Lbs

4T6698

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	50.0 mm.	1.97"	Bolt	31.7 mm.	1.25" (1-1/4")
L	240.0 mm.	9.45"	C	140.0 mm.	5.51"	Weight	17.15 Kg	37.80 Lbs

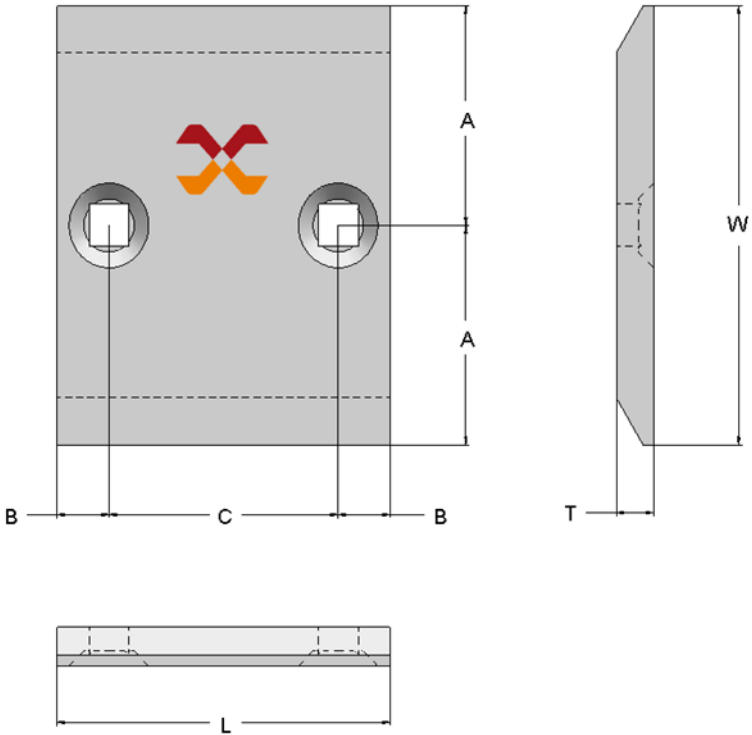

140-6867


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	50.0 mm.	1.97"	Bolt	31.7 mm.	1.25" (1-1/4")
L	240.0 mm.	9.45"	C	140.0 mm.	5.51"	Weight	20.00 Kg	44.10 Lbs

100-6664

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	46.0 mm.	1.81"	Bolt	31.7 mm.	1.25" (1-1/4")
L	255.0 mm.	10.04"	C	163.0 mm.	6.42"	Weight	18.60 Kg	41.00 Lbs

140-6869

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	46.0 mm.	1.81"	Bolt	31.7 mm.	1.25" (1-1/4")
L	255.0 mm.	10.04"	C	163.0 mm.	6.42"	Weight	21.59 Kg	47.83 Lbs

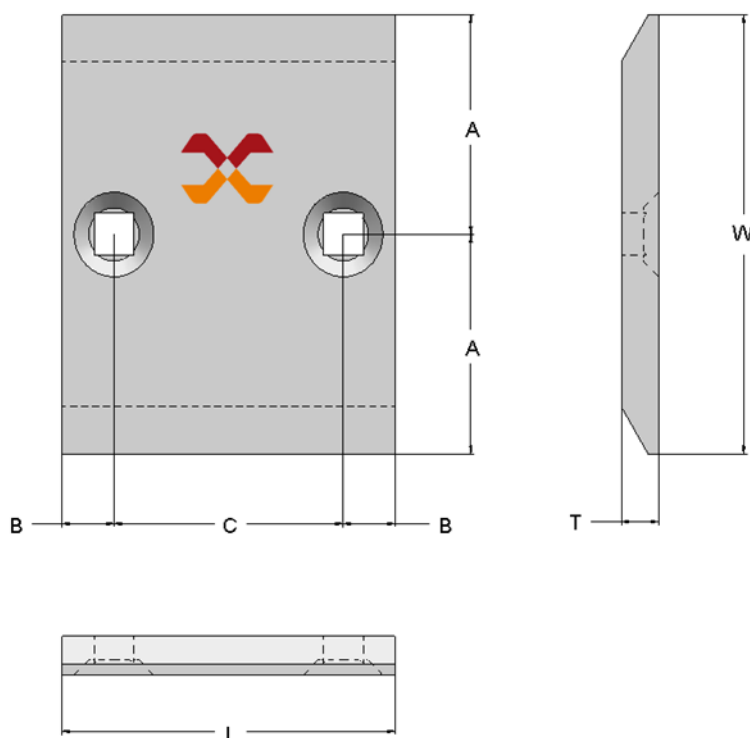

4T3015


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	61.0 mm.	2.40"	Bolt	31.7 mm.	1.25" (1-1/4")
L	256.0 mm.	10.07"	C	134.0 mm.	5.27"	Weight	18.37 Kg	40.50 Lbs

140-6862

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	61.0 mm.	2.40"	Bolt	31.7 mm.	1.25" (1-1/4")
L	256.0 mm.	10.07"	C	134.0 mm.	5.27"	Weight	21.43 Kg	47.25 Lbs

107-8582

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	45.0 mm.	1.77"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	61.0 mm.	2.40"	Bolt	31.7 mm.	1.25" (1-1/4")
L	256.0 mm.	10.07"	C	134.0 mm.	5.27"	Weight	27.55 Kg	60.75 Lbs

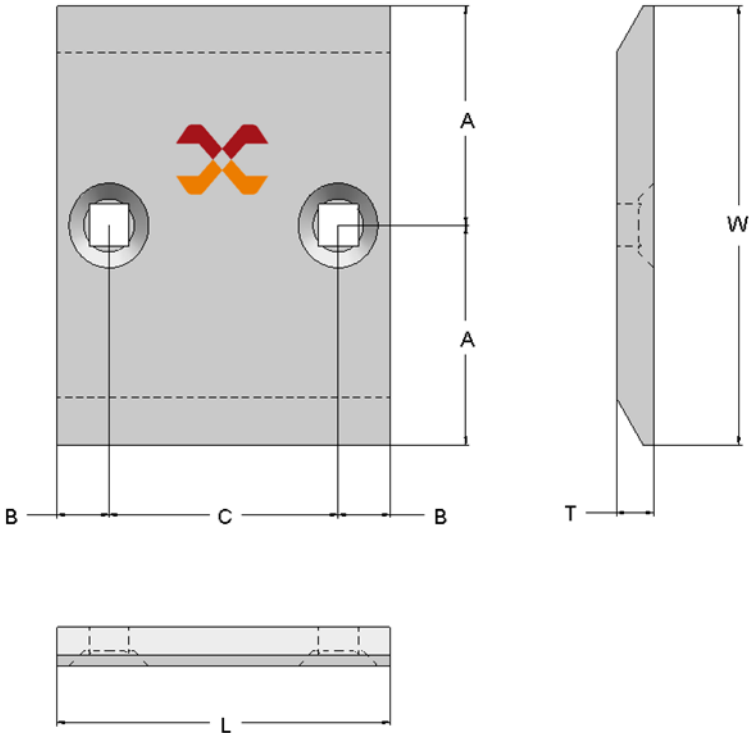

4T6699


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	45.0 mm.	1.77"	Bolt	31.7 mm.	1.25" (1-1/4")
L	270.0 mm.	10.62"	C	180.0 mm.	7.08"	Weight	19.32 Kg	42.60 Lbs

140-6868

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	45.0 mm.	1.77"	Bolt	31.7 mm.	1.25" (1-1/4")
L	270.0 mm.	10.62"	C	180.0 mm.	7.08"	Weight	22.59 Kg	49.80 Lbs

4T6700

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	65.0 mm.	2.56"	Bolt	31.7 mm.	1.25" (1-1/4")
L	290.0 mm.	11.42"	C	160.0 mm.	6.31"	Weight	20.96 Kg	46.20 Lbs

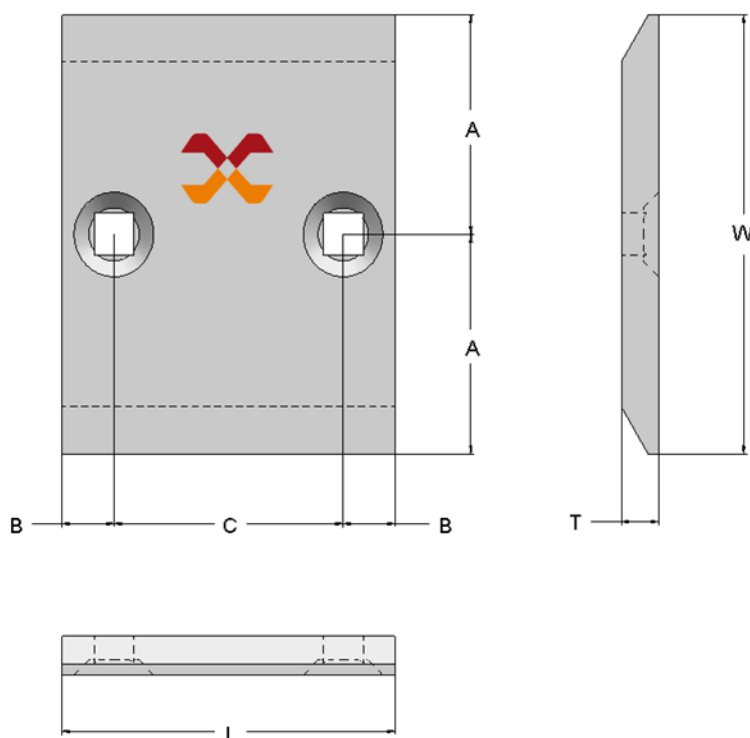

107-8580


Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	45.0 mm.	1.77"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	65.0 mm.	2.56"	Bolt	31.7 mm.	1.25" (1-1/4")
L	290.0 mm.	11.42"	C	160.0 mm.	6.31"	Weight	31.25 Kg	68.90 Lbs

100-6666

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	45.0 mm.	1.77"	Bolt	31.7 mm.	1.25" (1-1/4")
L	293.0 mm.	11.53"	C	203.0 mm.	8.00"	Weight	21.09 Kg	46.50 Lbs

140-6870

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	45.0 mm.	1.77"	Bolt	31.7 mm.	1.25" (1-1/4")
L	293.0 mm.	11.53"	C	203.0 mm.	8.00"	Weight	24.90 Kg	54.90 Lbs

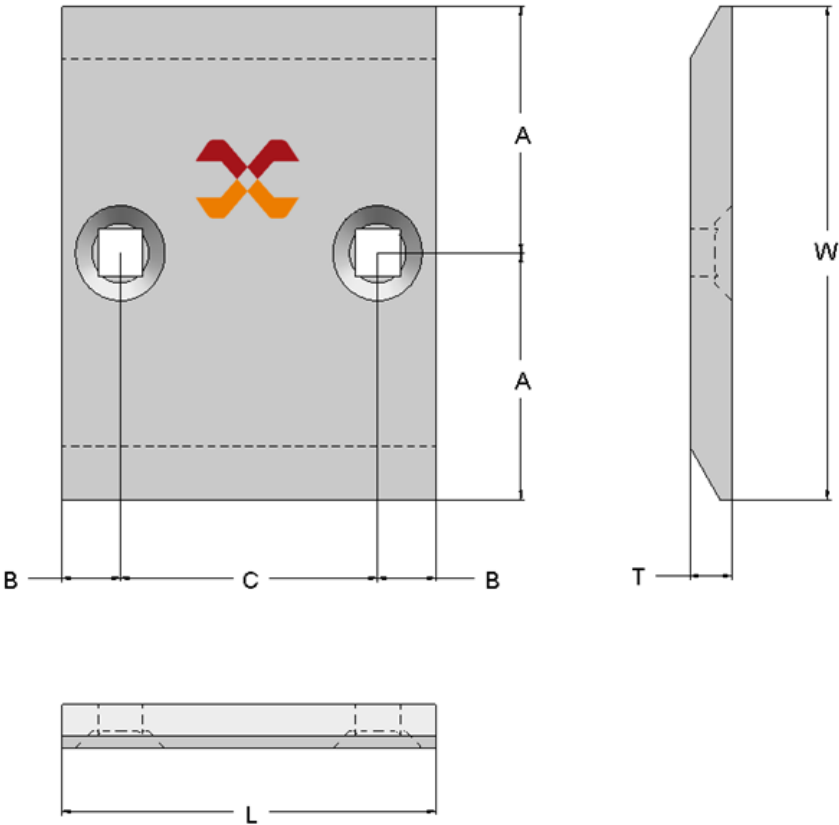


109-9019

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	30.0 mm.	1.18"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	65.0 mm.	2.56"	Bolt	31.7 mm.	1.25" (1-1/4")
L	315.0 mm.	12.40"	C	185.0 mm.	7.28"	Weight	22.91 Kg	50.50 Lbs


135-8219

Dimensions - Segments			Hole Spacing			Holes & Weight		
Dimensiones - Segmento			Distancia entre agujeros			Taladros y Peso		
T	45.0 mm.	1.77"	A	180.0 mm.	7.08"	Qty	2	
W	360.0 mm.	14.17"	B	65.0 mm.	2.56"	Bolt	31.7 Mm.	1.25" (1-1/4")
L	315.0 mm.	12.40"	C	185.0 mm.	7.28"	Weight	22.91 Kg	50.50 Lbs

Rear Wear Plates. Refuerzos Cucharón.

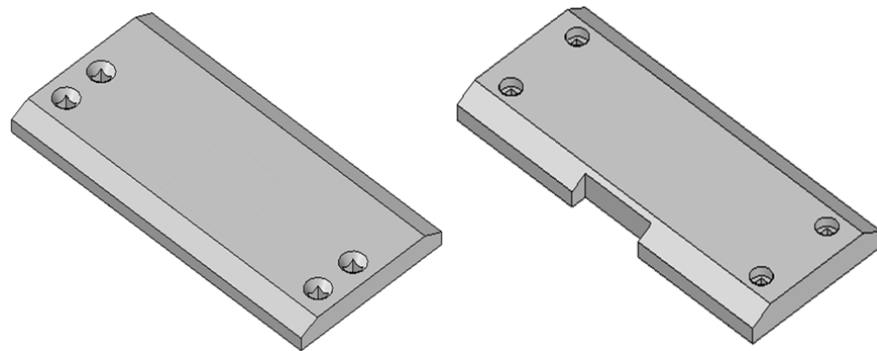


Reference	Thick - Grueso		Width - Ancho		Length - Largo		Bolts		Pag.
Referencia	mm.	Inch.	mm.	Inch.	mm.	Inch.	Tornillos		
9W6747	25.0 mm	1.00"	254.0 mm	10.00"	527.0 mm	20.75"	4	3/4"	95
9W6749	35.0 mm	1.37"	254.0 mm	10.00"	585.0 mm	23.00"	4	3/4"	96
109-9215	35.0 mm	1.37"	254.0 mm	10.00"	622.3 mm	24.50"	4	3/4"	96
161-8573	35.0 mm	1.37"	254.0 mm	10.00"	565.0 mm	22.25"	4	3/4"	97
9W6750	35.0 mm	1.37"	254.0 mm	10.00"	596.0 mm	23.46"	4	3/4"	97

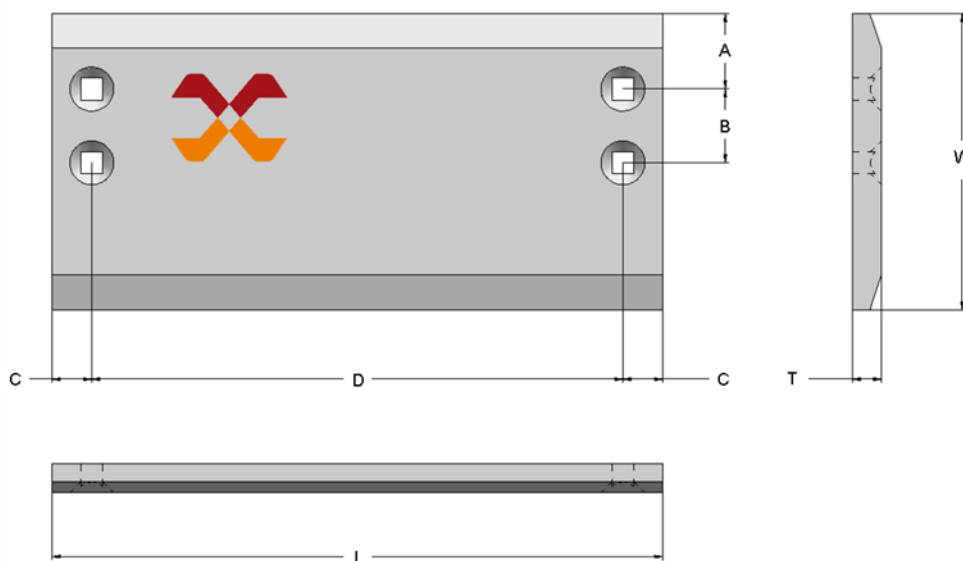

9W6747

Dimensions - Rear Wear Plate			Hole Spacing			Holes & Weight		
Dimensiones - Refuerzo			Distancia entre agujeros			Taladros y Peso		
T	25.4 mm.	1.00"	A	65.0 mm.	2.55"	Qty	4	
W	254.0 mm.	10.00"	B	63.0 mm.	2.48"	Bolt	19.0 mm.	0.75" (3/4")
L	527.0 mm.	20.75"	C	35.0 mm.	1.37"	Weight	24.49 Kg	54.0 Lbs
			D	457.0 mm.	18.00"			

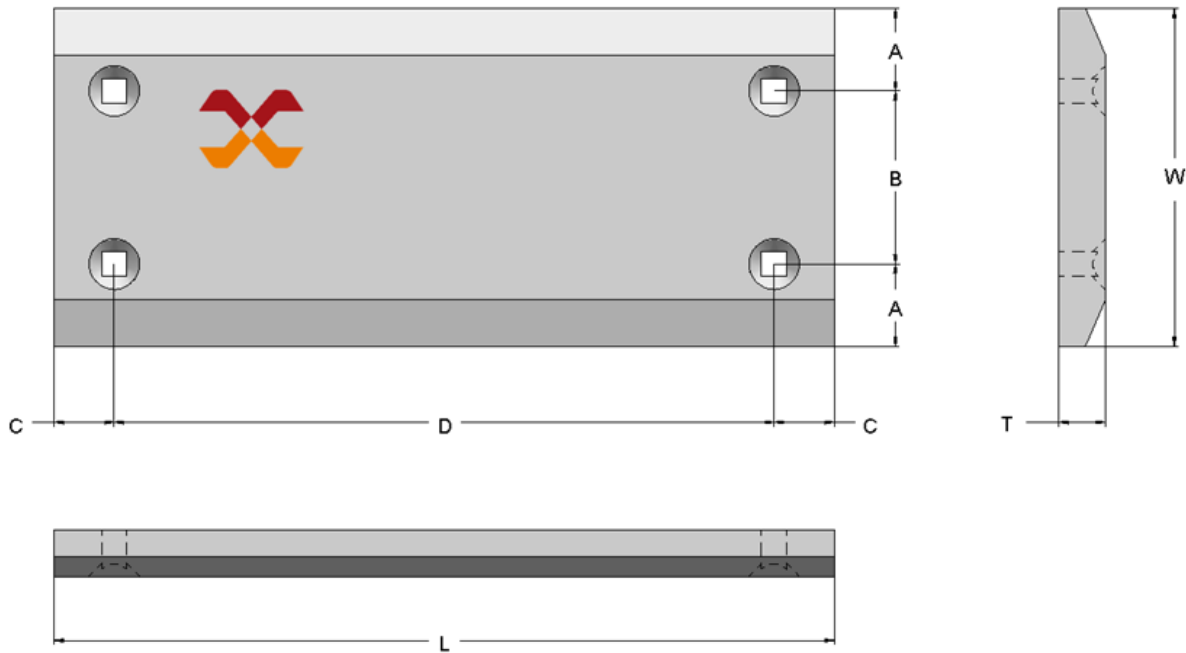


9W6749

Dimensions - Rear Wear Plate			Hole Spacing			Holes & Weight		
Dimensiones - Refuerzo			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	62.0 mm.	2.44"	Qty	4	
W	254.0 mm.	10.00"	B	130.0 mm.	5.11"	Bolt	19.0 mm.	0.75" (3/4")
L	585.0 mm.	23.00"	C	45.0 mm.	1.77"	Weight	26.47 Kg	58.35 Lbs
			D	495.0 mm.	19.50"			

109-9215

Dimensions - Rear Wear Plate			Hole Spacing			Holes & Weight		
Dimensiones - Refuerzo			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	67.5 mm.	2.65"	Qty	4	
W	254.0 mm.	10.00"	B	119.0 mm.	4.72"	Bolt	19.0 mm.	0.75" (3/4")
L	622.3 mm.	24.50"	C	50.8 mm.	2.00"	Weight	40.91 Kg	90.20 Lbs
			D	520.7 mm.	20.50"			

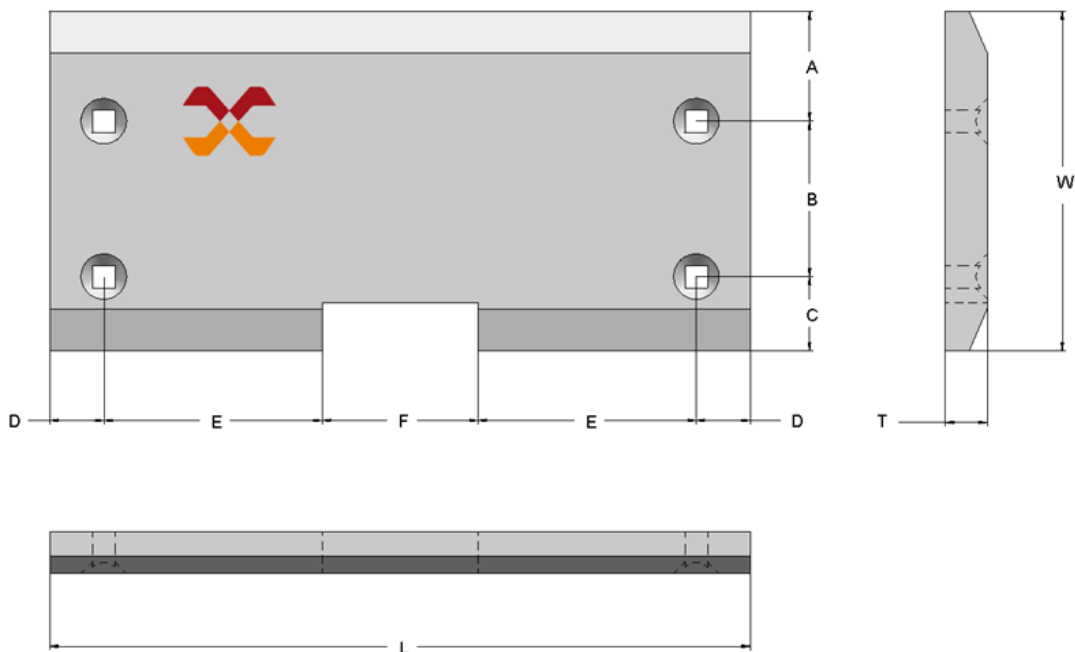

161-8573

Dimensions - Rear Wear Plate			Hole Spacing			Holes & Weight		
Dimensiones - Refuerzo			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	94.0 mm.	3.70"	Qty	4	
W	254.0 mm.	10.00"	B	100.0 mm.	3.93"	Bolt	19.0 mm.	0.75" (3/4")
L	565.0 mm.	22.25"	C	60.0 mm.	2.36"	Weight	36.38 Kg	80.20 Lbs
			D	35.0 mm.	1.37"			
			E	182.5 mm.	7.18"			
			F	130.0 mm.	5.11"			

9W6750

Dimensions - Rear Wear Plate			Hole Spacing			Holes & Weight		
Dimensiones - Refuerzo			Distancia entre agujeros			Taladros y Peso		
T	35.0 mm.	1.37"	A	104.0 mm.	4.09"	Qty	4	
W	254.0 mm.	10.00"	B	100.0 mm.	3.93"	Bolt	19.0 mm.	0.75" (3/4")
L	596.0 mm.	23.46"	C	50.0 mm.	1.96"	Weight	36.47 Kg	80.40 Lbs
			D	35.0 mm.	1.37"			
			E	185.0 mm.	7.28"			
			F	156.0 mm.	6.14"			



PETRAX

CAT GET **PETRAX**

EDITION - EDICION 2020