



PETRAX

CATÁLOGO MIXTAS PETRAX

EDITION - EDICION 2020


Brands	Model	Width Bucket	Type.	Pag.
Marca	Modelo	Ancho Cucharón	Tipo	
CATERPILLAR	416/420/424/426/428 430/432/436/438/442	Bucket - Cucharón 2262 mm. 89.00"	GP	4-5
CATERPILLAR	416/420/424/426/428 430/432/436/438/442	Bucket - Cucharón 2262 mm. 89.00"	MP	6-7
CATERPILLAR	416/420/424/426/428 430/432/436/438/442	Bucket - Cucharón 2396 mm. 94.00"	GP	8-9
CATERPILLAR	416/420/424/426/428 430/432/436/438/442	Bucket - Cucharón 2396 mm. 94.00"	MP	10-11
CASE	580/590/680/690	Bucket - Cucharón 2080 mm. 82.00"	GP	12-13
CASE	580/590/680/690	Bucket - Cucharón 2392 mm. 94.17"	GP	14-15
CASE	580/590/680/690	Bucket - Cucharón 2439 mm. 95.98"	GP	16-17
JCB	3CX 4CX	Bucket - Cucharón 2230 mm. 87.80"	GP	18-19
JCB	3CX 4CX	Bucket - Cucharón 2350 mm. 92.50"	GP	20-21
JHON DEERE	300/310/315/325 500/510/610/710	Bucket - Cucharón 2346 mm. 92.36"	GP	22-23
JHON DEERE	317/318/319/320/323/324 325/326/328/329/330/331 332/333	Bucket - Cucharón 1930 mm. 75.98"	GP	24-25
KOMATSU	WB93/95/97	Bucket - Cucharón 2320 mm. 91.33"	GP	26-27
NEW HOLLAND	LB110/115	Bucket - Cucharón 2400 mm. 94.48"	GP	28-29
VOLVO	BL60 BL70	Bucket - Cucharón 2350 mm. 92.50"	GP	30-31

GP General Purpose Uso General

MP Multi Purpose Multiuso


General Purpose - Front Buckets

Uso General - Cucharón Frontal

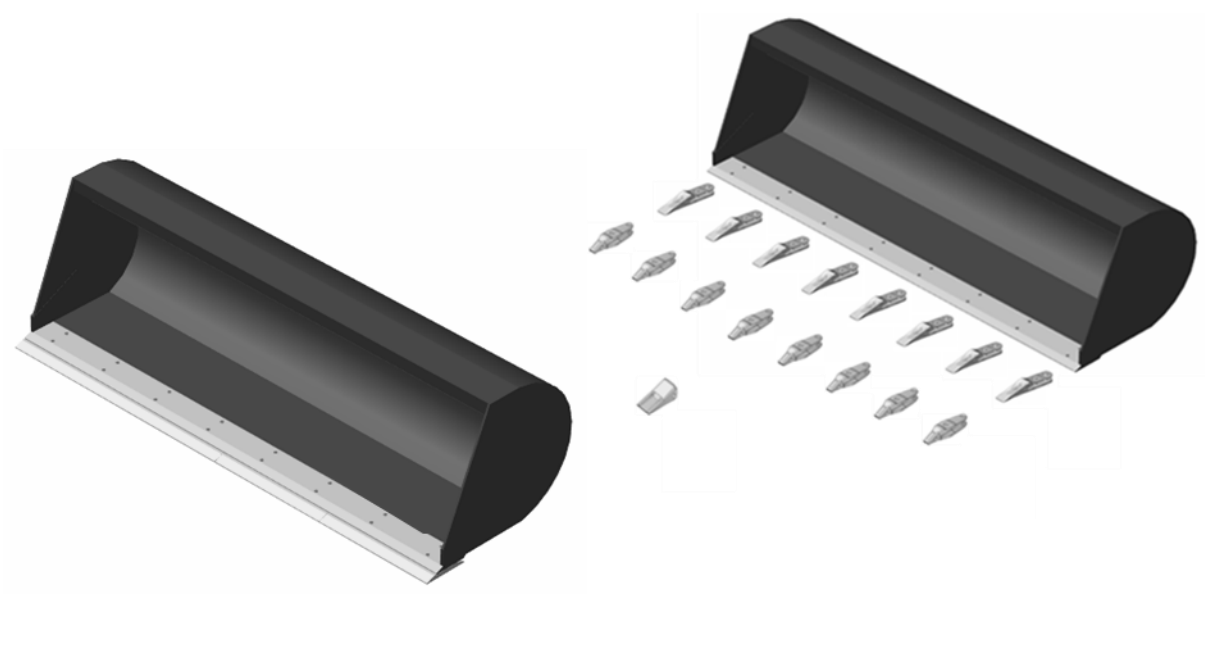

Multi Purpose - Front Buckets

Multiuso - Cucharon Frontal

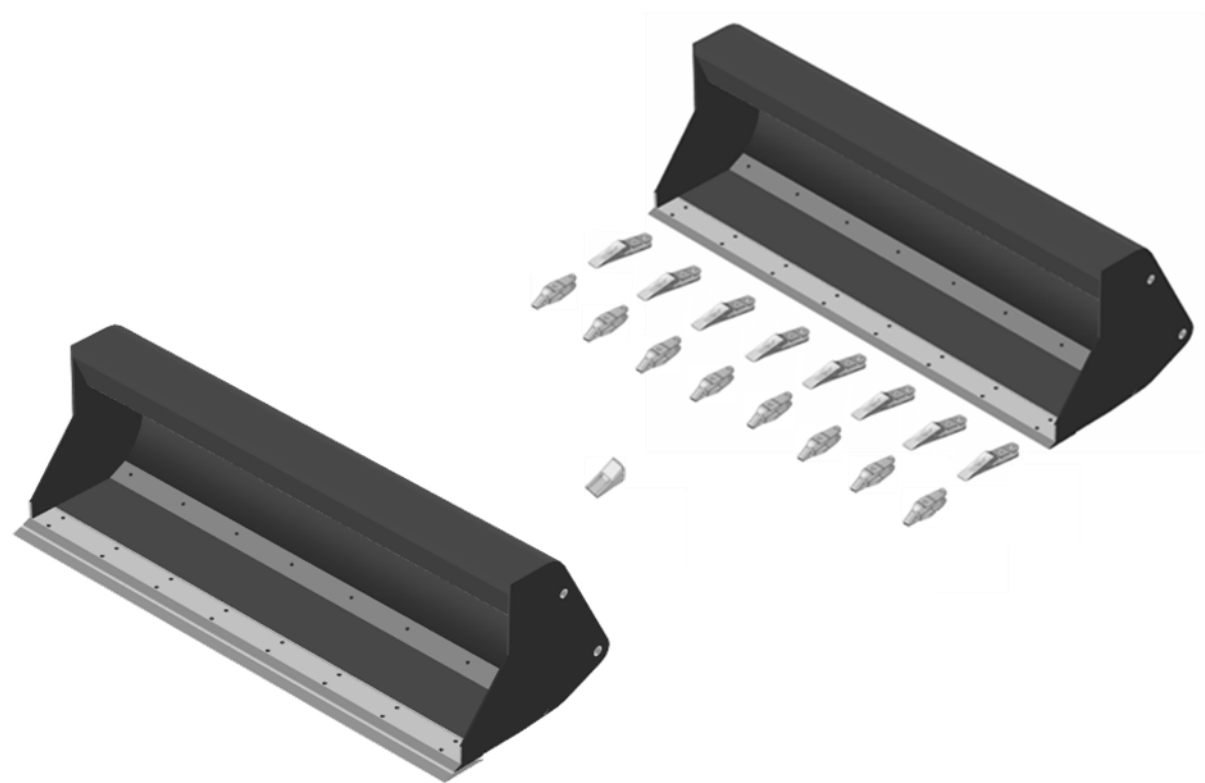

CATERPILLAR

416/420/424/426/428/430/432/436/438/442

Serial Number

Numero de Serie

9R5201 9R5988 9R5989




General Purpose - Front Buckets

Uso General - Cucharón Frontal

Bucket- Cucharón 2262 mm. 89.0"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	9R4672	1	20.0	152,4	2262	5/8"	16
2	Corner (Right)	9R5205	1	20.0	152,4	141,3		
3	Corner (Left)	9R5206	1	20.0	152,4	141,3		

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant	Tornillos	Tuercas
4	Uniteeth	6Y6335 135-8203	8	4F3656	4K0367
5	Adapter	8E2184	8	4F3656	4K0367
6	Tips	J200	8	(16)	(16)

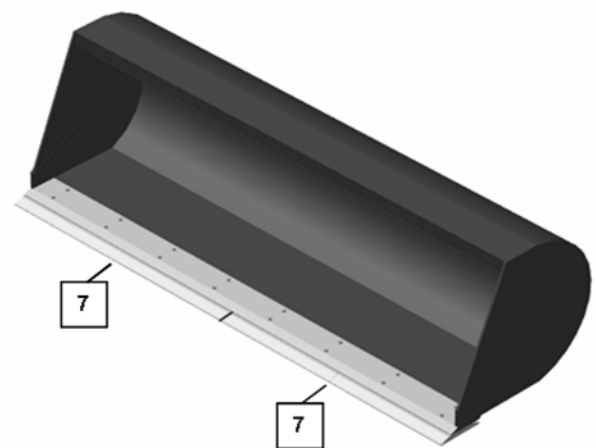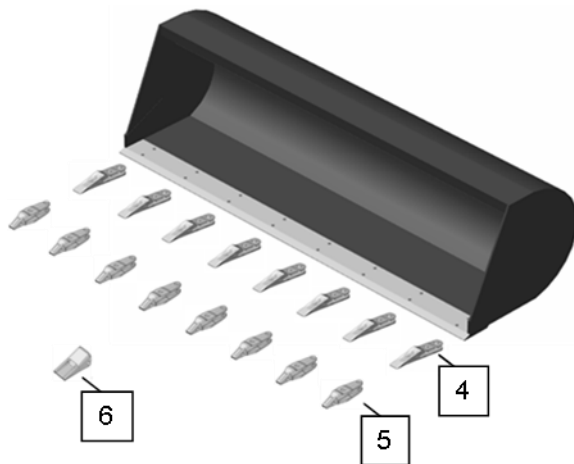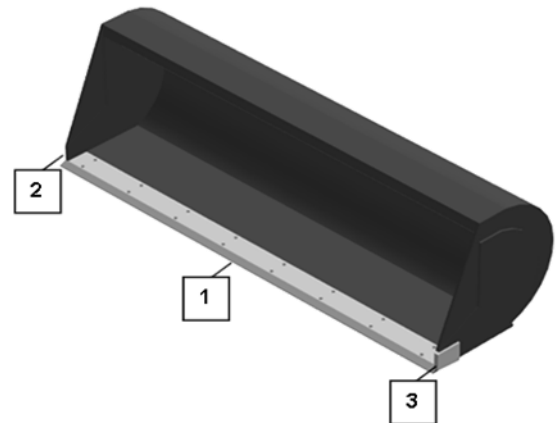


Bolt - On Edges - Subcuchillas


Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
7	Center Sections	9W8215	2	20.0	200.0	1130.0	5/8"	2	3F5108 (8)	4K0367 (8)

9R4672


Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.8 Mm.	2.00"	Qty	16	
W	152.4 Mm.	6.00"	B	81.0 Mm.	3.18"	Bolt	16.0 Mm.	0.62" (5/8")
L	2262.0 Mm.	89.05"	C	300.0 Mm.	11.81"	Weight	47.17 kg	104.4 Lbs
			D	75.0 Mm.	2.95"			

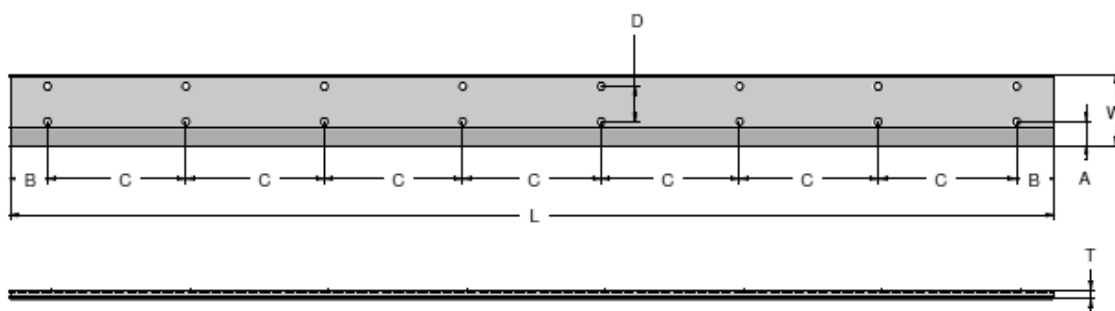
6Y6335
135-8203
Uniteeth - Dimensions
Dimensiones - Adaptador

	M/m.	Inch.
T	50.8 Mm.	2.00"
I	75.0 Mm.	2.95"
S	22.0 Mm.	0.86"

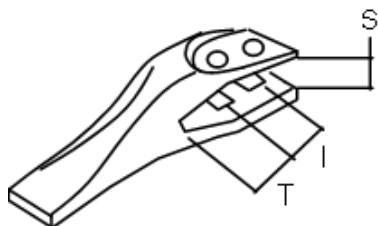
9W8215

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	4	
W	203.2 Mm.	8.00"	B	84.0 Mm.	3.30"	Bolt	16.0 Mm.	0.62" (5/8")
L	1130.0 Mm.	44.48"	C	300.0 Mm.	11.81"	Weight	31.75 kg	70.0 Lbs
			D	146.0 Mm.	5.74"			

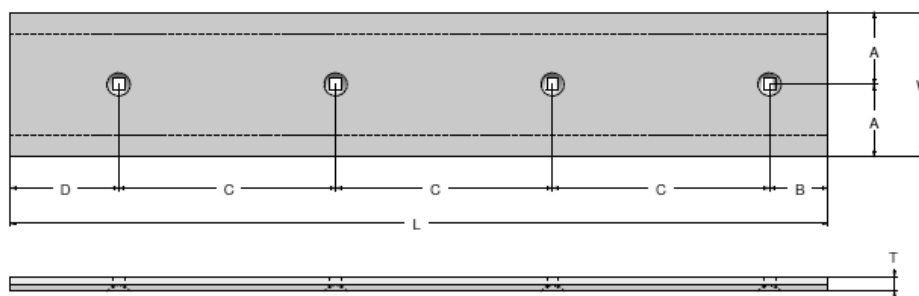



CATERPILLAR

416/420/424/426/428/430/432/ 436/438/442

Serial Number

Numero de Serie

9R5427 9R3732 9R3733 9R4667 108-3036 9R6088




Multi Purpose - Front Buckets

Multiuso - Cucharón Frontal

Bucket- Cucharón 2262 mm. 89.0"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	9R4672	1	20.0	152,4	2262	5/8"	16
2	Corner (Right/Left)	9R4674	2	20.0	152,4	147,6		
3	Dozer Center	9R4670	1	12.7	100,1	2262	5/8"	8

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant	Tornillos	Tuercas
4	Uniteeth	6Y6335	8	4F3656	4K0367
5	Adapter	8E2184	8	4F3656	4K0367
6	Tips	J200	8	(16)	(16)

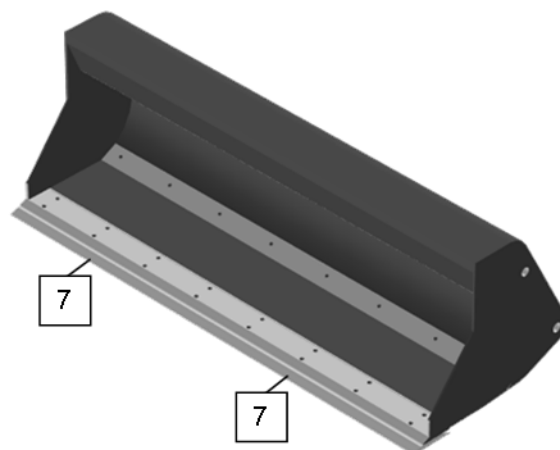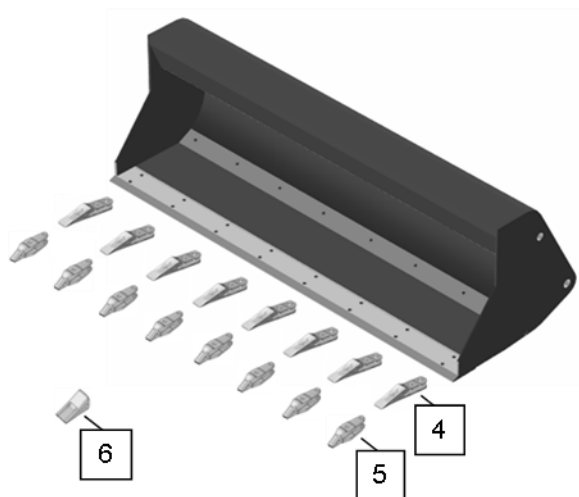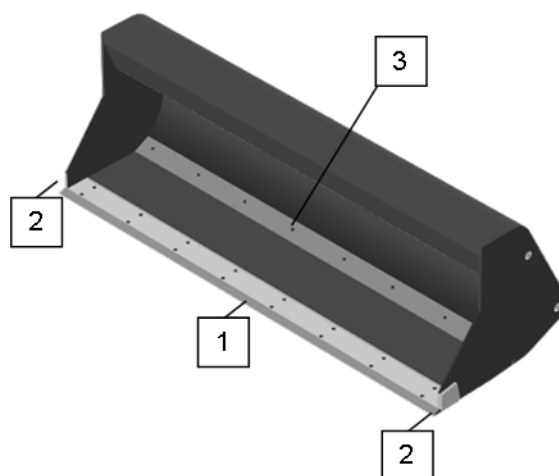


Bolt - On Edges - Subcuchillas


Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
7	Center Sections	9W8215	2	20.0	200.0	1130.0	5/8"	2	3F5108 (8)	4K0367 (8)

9R4672


Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.8 Mm.	2.00"	Qty	16	
W	152.4 Mm.	6.00"	B	81.0 Mm.	3.18"	Bolt	16.0 Mm.	0.62" (5/8")
L	2262.0 Mm.	89.05"	C	300.0 Mm.	11.81"	Weight	47.17 kg	104.4 Lbs
			D	75.0 Mm.	2.95"			

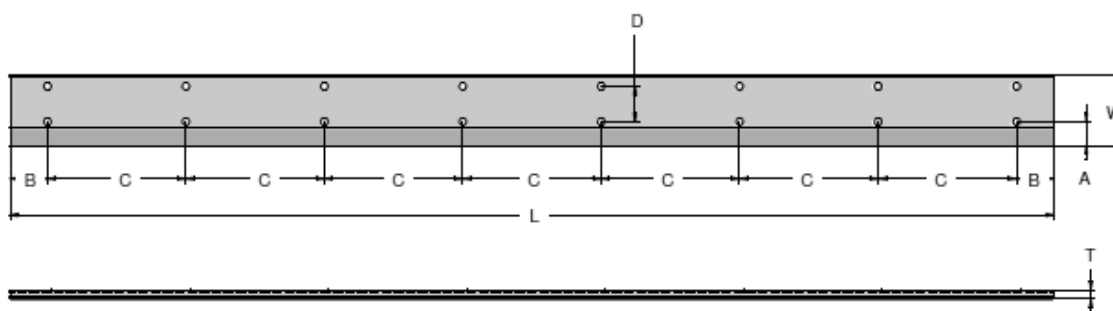
6Y6335
135-8203
Uniteeth - Dimensions
Dimensiones - Adaptador

	M/m.	Inch.
T	50.8 Mm.	2.00"
I	75.0 Mm.	2.95"
S	22.0 Mm.	0.86"

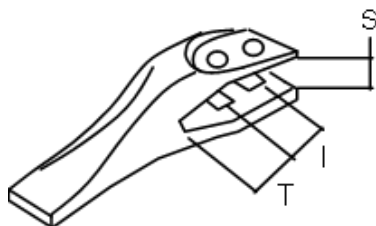
9W8215

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	4	
W	203.2 Mm.	8.00"	B	84.0 Mm.	3.30"	Bolt	16.0 Mm.	0.62" (5/8")
L	1130.0 Mm.	44.48"	C	300.0 Mm.	11.81"	Weight	31.75 kg	70.0 Lbs
			D	146.0 Mm.	5.74"			

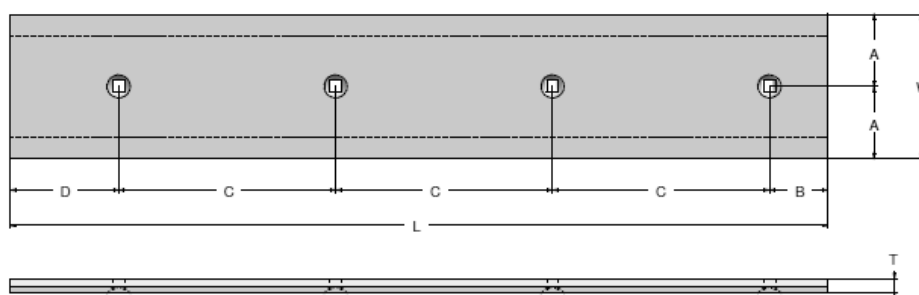

CATERPILLAR
**416/420/424/426/428/430/432/
436/438/442**
PETRAX

Serial Number

Numero de Serie

9R5202 118-1971 112-1932 118-1984 112-1933




General Purpose - Front Buckets

Uso General - Cucharón Frontal

Bucket- Cucharón 2396 mm. 94.0"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	9R5313	1	20.0	152,4	2396	5/8"	16
2	Corner (Right)	9R5205	1	20.0	152,4	141,3		
3	Corner (Left)	9R5206	1	20.0	152,4	141,3		

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant	Tornillos	Tuercas
4	Uniteeth	6Y6335 135-8203	8	4F3656	4K0367
5	Adapter	8E2184	8	4F3656	4K0367
6	Tips	J200	8	(16)	(16)

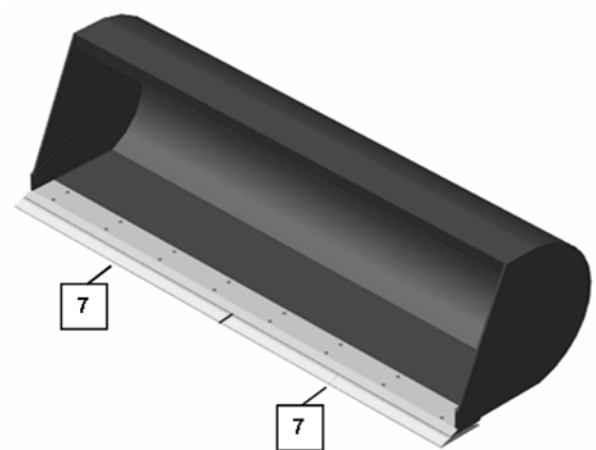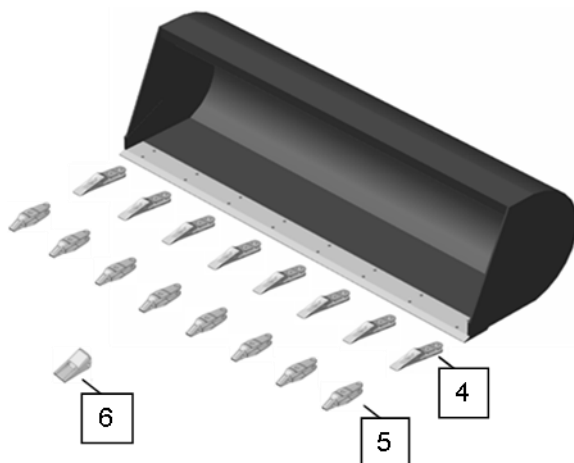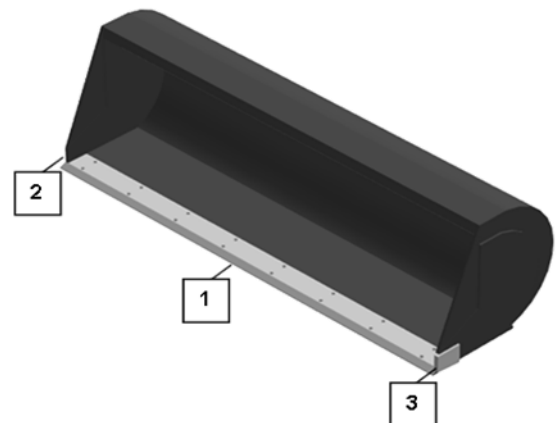


Bolt - On Edges - Subcuchillas


Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
7	Center Sections	118-7110	2	20.0	203.0	1200.0	5/8"	4	3F5108 (8)	4K0367 (8)

9R5313


Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	16	
W	152.4 Mm.	6.00"	B	131.2 Mm.	5.16"	Bolt	16.0 Mm.	0.62" (5/8")
L	2396.0 Mm.	94.30"	C	304.8 Mm.	12.00"	Weight	51.07 kg	112.6 Lbs
			D	75.0 Mm.	2.95"			

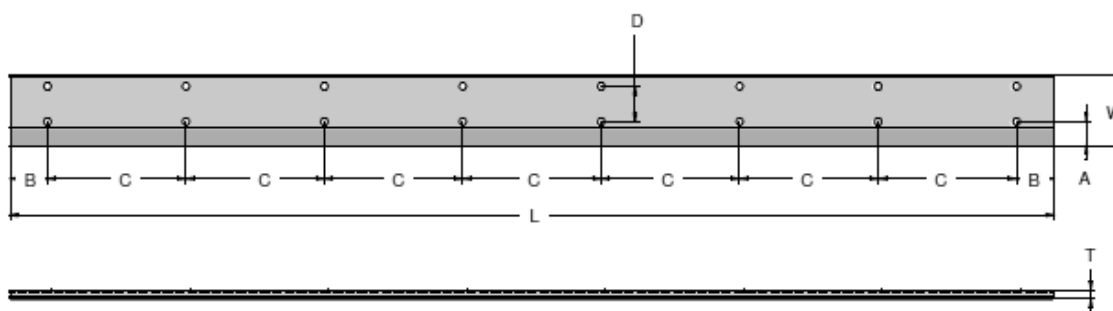
6Y6335
135-8203
Uniteeth - Dimensions
Dimensiones - Adaptador

	M/m.	Inch.
T	50.8 Mm.	2.00"
I	75.0 Mm.	2.95"
S	22.0 Mm.	0.86"

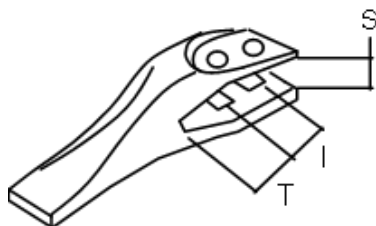
118-7110

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	4	
W	203.2 Mm.	8.00"	B	134.6 Mm.	5.29"	Bolt	16.0 Mm.	0.62" (5/8")
L	1200.0 Mm.	47.20"	C	304.8 Mm.	12.00"	Weight	32.66 kg	72.0 Lbs
			D	151.0 Mm.	5.94"			

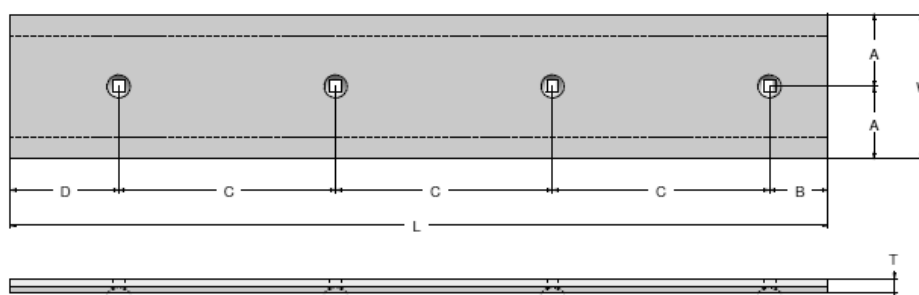



CATERPILLAR

416/420/424/426/428/430/432/
436/438/442

Serial Number

Numero de Serie

9R5787 9R5789 104-3964 104-3965




Multi Purpose - Front Buckets

Multiuso - Cucharón Frontal

Bucket- Cucharón 2396 mm. 94.0"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	9R5313	1	20.0	152,4	2396	5/8"	16
2	Corner (Right/Left)	9R4674	2	20.0	152,4	147,6		
3	Dozer Center	9R5786	1	12.7	100,1	2396	5/8"	8

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant	Tornillos	Tuercas
4	Uniteeth	6Y6335 135-8203	8	4F3656	4K0367
5	Adapter	8E2184	8	4F3656	4K0367
6	Tips	J200	8	(16)	(16)

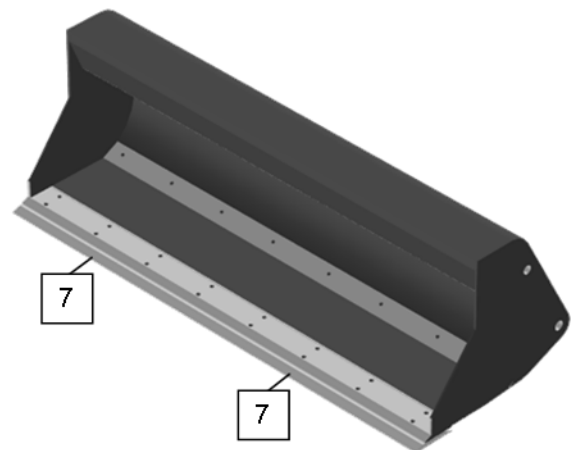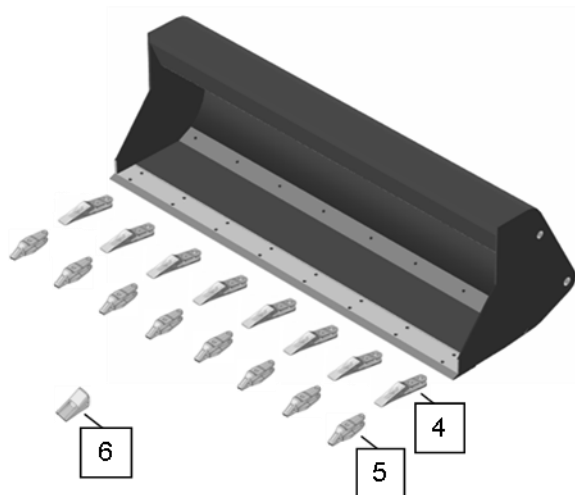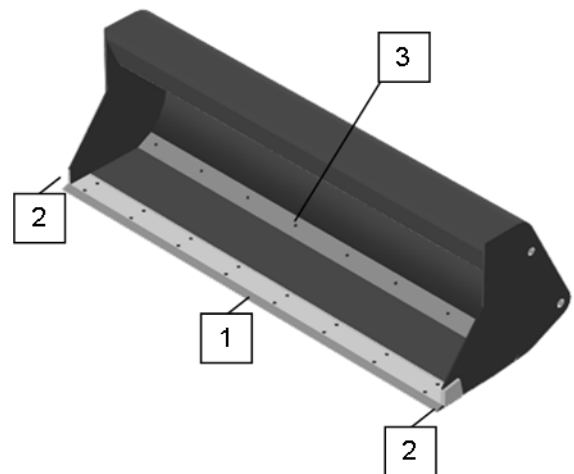


Bolt - On Edges - Subcuchillas


Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
7	Center Sections	118-7110	2	20.0	203.0	1200.0	5/8"	4	3F5108 (8)	4K0367 (8)

9R5313


Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	16	
W	152.4 Mm.	6.00"	B	131.2 Mm.	5.16"	Bolt	16.0 Mm.	0.62" (5/8")
L	2396.0 Mm.	94.30"	C	304.8 Mm.	12.00"	Weight	51.07 kg	112.6 Lbs
			D	75.0 Mm.	2.95"			

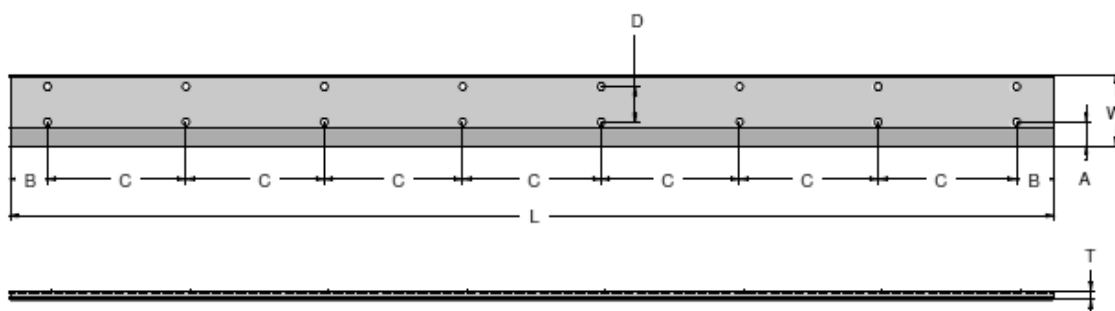
6Y6335
135-8203
Uniteeth - Dimensions
Dimensiones - Adaptador

	M/m.	Inch.
T	50.8 Mm.	2.00"
I	75.0 Mm.	2.95"
S	22.0 Mm.	0.86"

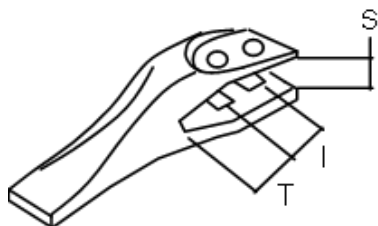
118-7110

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	4	
W	203.2 Mm.	8.00"	B	134.6 Mm.	5.29"	Bolt	16.0 Mm.	0.62" (5/8")
L	1200.0 Mm.	47.20"	C	304.8 Mm.	12.00"	Weight	32.66 kg	72.0 Lbs
			D	151.0 Mm.	5.94"			

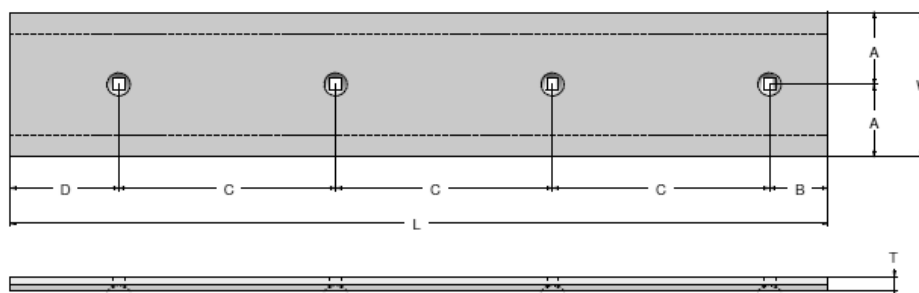

CASE 580/590/680/690


Serial Number Numero de Serie

General Purpose - Front Buckets

Uso General - Cucharón Frontal


Bucket- Cucharón 2080 mm. 92.0"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	D145680	1	20.0	152,4	2081.0	3/4"	10

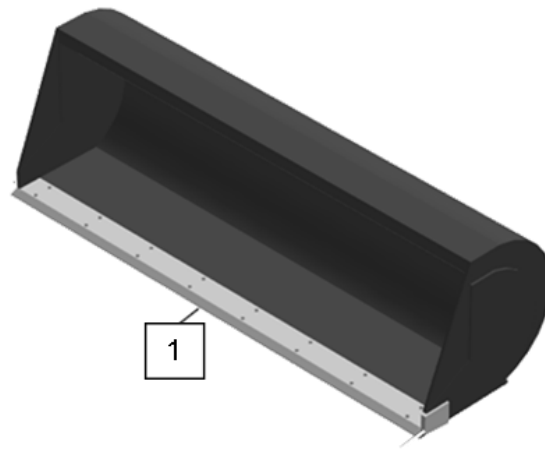


Bolt - On Edges - Subcuchillas

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
2	Center Sections	D145681	1	20.0	200.0	2082.8	3/4"	10	3/4" x 2-1/4" (10)	3/4" (10)

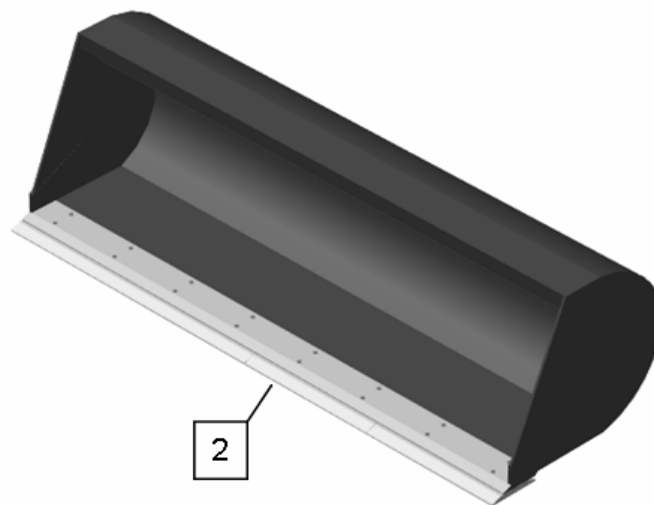


D145680

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	10	
W	152.4 Mm.	6.00"	B	126.1 Mm.	4.96"	Bolt	19.05 Mm.	0.75" (3/4")
L	2081.0 Mm.	81.90"	C	203.2 Mm.	8.00"	Weight	44.45 kg	98.0 Lbs
			D	126.1 Mm.	4.96"			

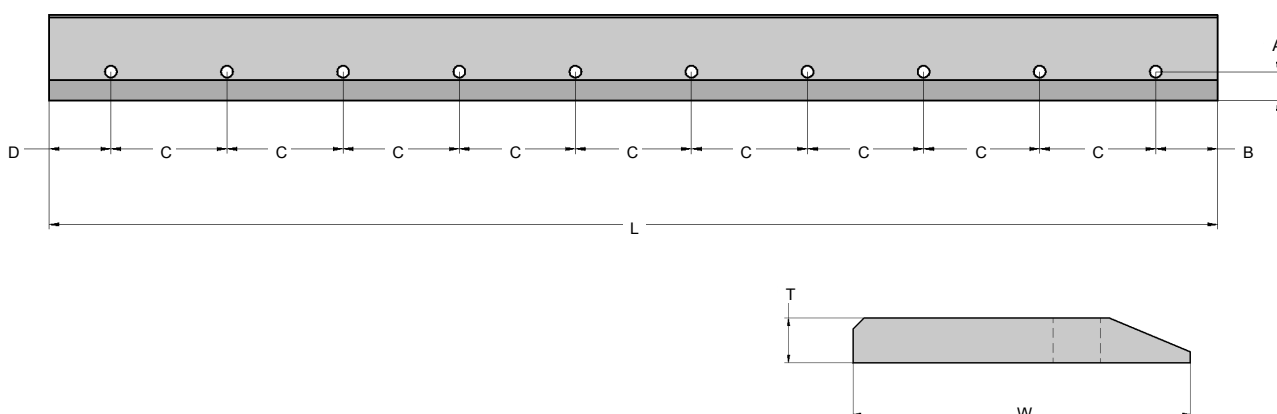

D145681

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	10	
W	200.0 Mm.	8.00"	B	127.0 Mm.	5.00"	Bolt	19.05 Mm.	0.75" (3/4")
L	2082.8 Mm.	82.00"	C	203.2 Mm.	8.00"	Weight	56.70 kg	125.0 Lbs
			D	127.0 Mm.	5.00"			

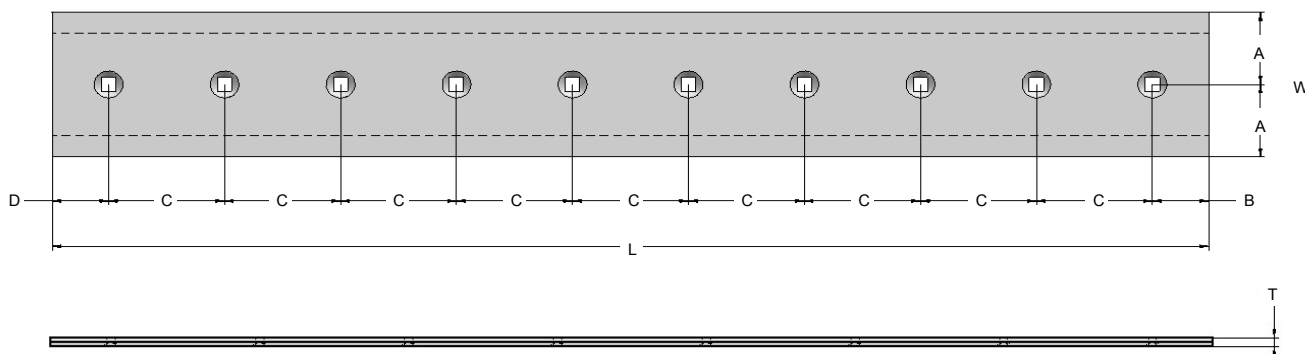

CASE 580/590/680/690


Serial Number Numero de Serie

General Purpose - Front Buckets

Uso General - Cucharón Frontal


Bucket- Cucharón 2392 mm. 94.0"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	D32209	1	20.0	152,4	2392.0	3/4"	10

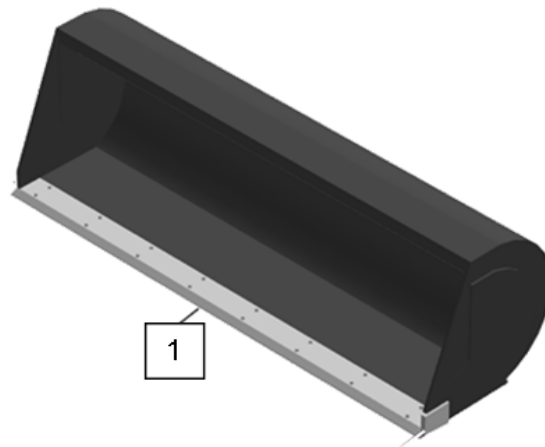


Bolt - On Edges - Subcuchillas

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
2	Center Sections	185506A1	1	20.0	152.4	2392.0	3/4"	10	3/4" x 2-1/4" (10)	3/4" (10)

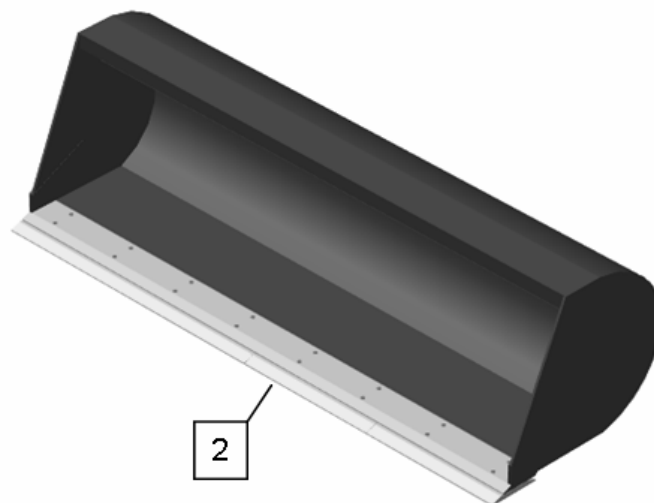


D32209

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	10	
W	152.4 Mm.	6.00"	B	85.4 Mm.	3.36"	Bolt	19.05 Mm.	0.75" (3/4")
L	2392.0 Mm.	94.17"	C	246.8 Mm.	9.72"	Weight	47.90 kg	105.6 Lbs
			D	85.4 Mm.	3.36"			

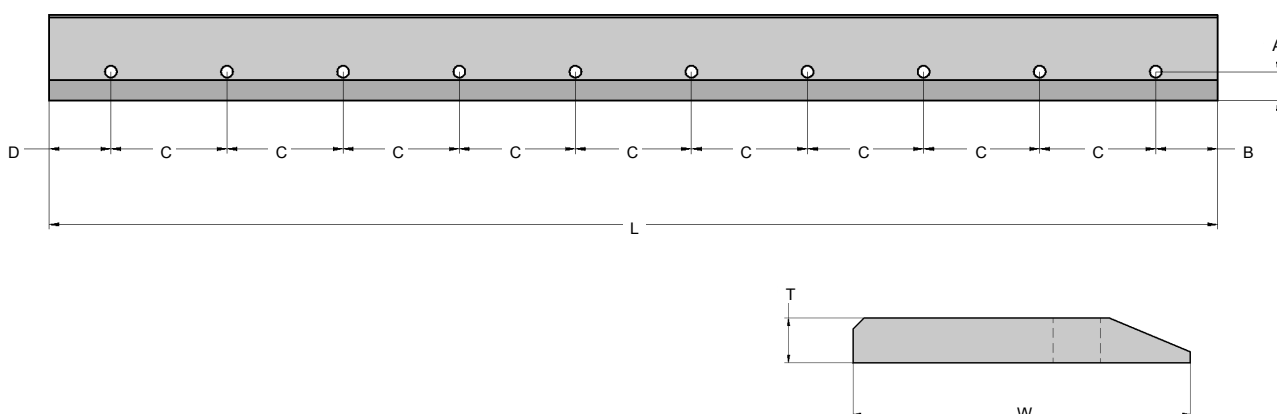

185506A1

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	76.2 Mm.	3.00"	Qty	10	
W	152.4 Mm.	6.00"	B	85.4 Mm.	3.36"	Bolt	19.05 Mm.	0.75" (3/4")
L	2392.0 Mm.	94.17"	C	246.8 Mm.	9.72"	Weight	50.21 kg	110.7 Lbs
			D	85.4 Mm.	3.36"			

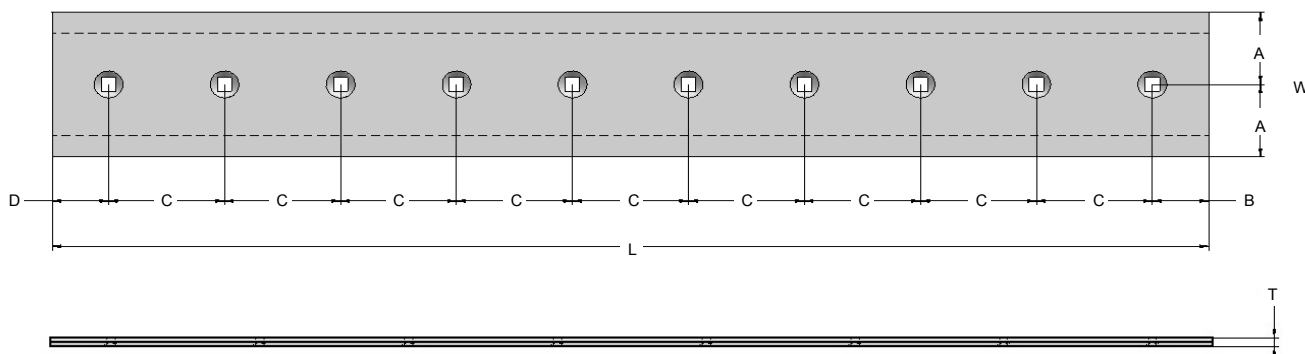

CASE 580/590/680/690


Serial Number Numero de Serie

General Purpose - Front Buckets

Uso General - Cucharón Frontal


Bucket- Cucharón 2439 mm. 95.98"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	332448A1	1	20.0	200.0	2439.0	3/4"	10

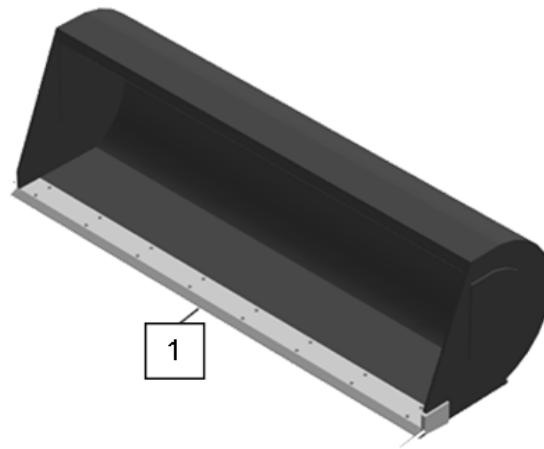


Bolt - On Edges - Subcuchillas

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
2	Center Sections	332449A1	1	20.0	152.4	2392.0	3/4"	10	3/4" x 2-1/4" (10)	3/4" (10)

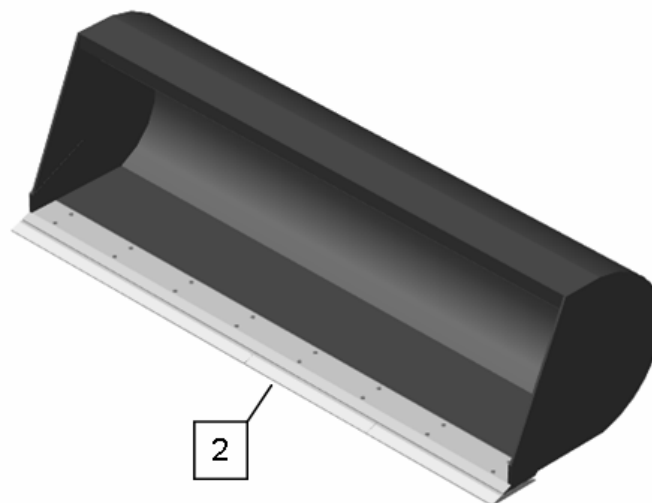


332448A1

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	10	
W	200.0 Mm.	8.00"	B	108.9 Mm.	4.25"	Bolt	19.05 Mm.	0.75" (3/4")
L	2439.0 Mm.	95.98"	C	246.8 Mm.	9.72"	Weight	66.27 kg	146.1 Lbs
			D	108.9 Mm.	4.25"			

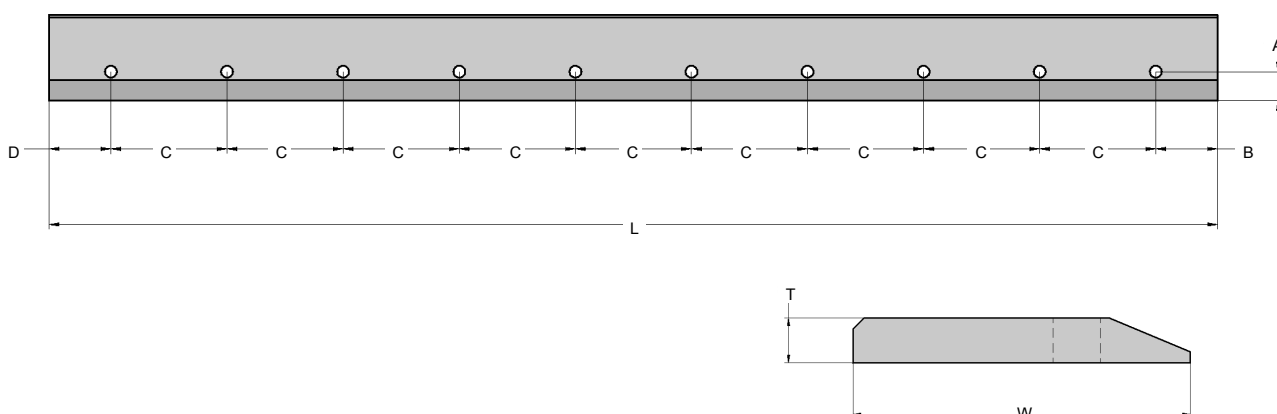

332449A1

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	10	
W	200.0 Mm.	8.00"	B	108.9 Mm.	4.25"	Bolt	19.05 Mm.	0.75" (3/4")
L	2439.0 Mm.	95.98"	C	246.8 Mm.	9.72"	Weight	68.04 kg	150.0 Lbs
			D	108.9 Mm.	4.25"			

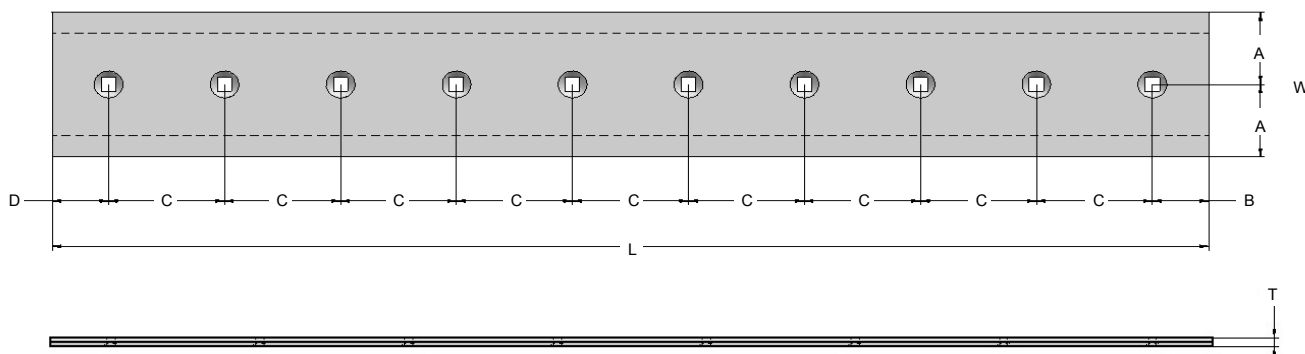

JCB **3CX 4CX**

Serial Number Numero de Serie




General Purpose - Front Buckets

Uso General - Cucharón Frontal

Bucket- Cucharón 2230 mm. 87.80"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	123/04023	1	20.0	200.0	2235.0	3/4"	16

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant	Tornillos	Tuercas
2	Uniteeth	332/C4388	6/8	3/4" x 2-1/2" (12)	3/4" (12)
3	Corner Adapter Righth	332/C4390 53103208	1	3/4" x 2-1/2" (2) 3/4" x 2" (2)	3/4" (4)
4	Corner Adapter Left	332/C4389 53103209	1	3/4" x 2-1/2" (2) 3/4" x 2" (2)	3/4" (4)

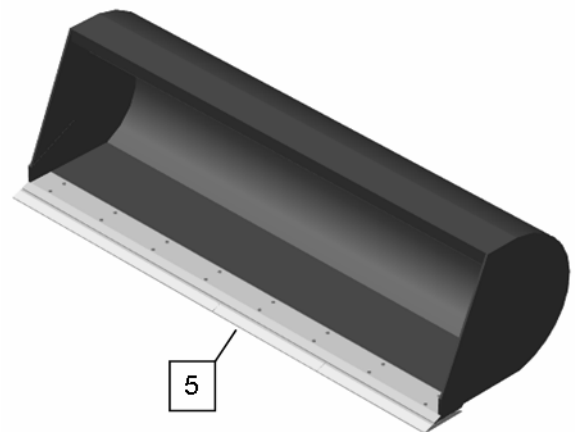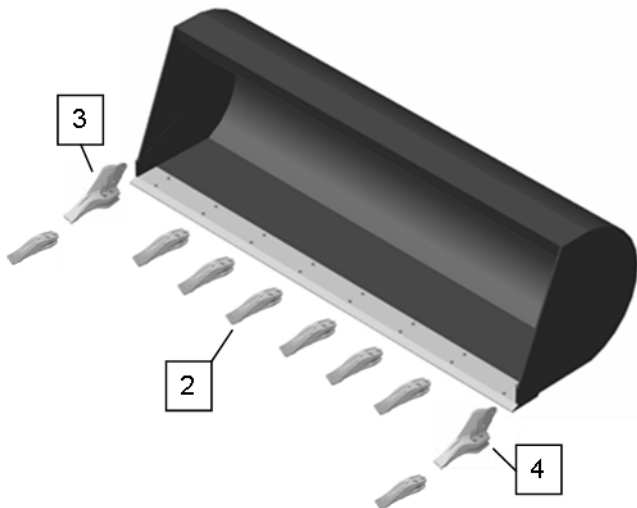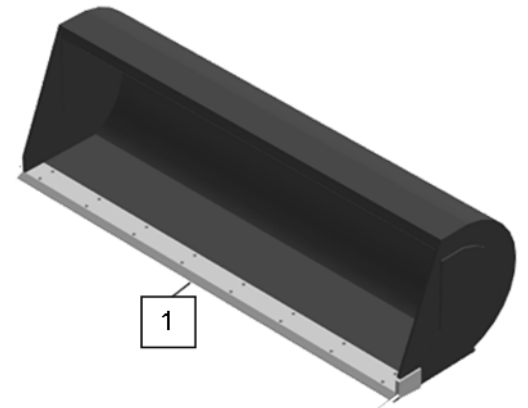


Bolt - On Edges - Subcuchillas

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
5	Center Section	993-99391	1	20.0	200.0	2235.0	3/4"	8	3/4" x 2-1/2" (8)	3/4" (8)




123/04023

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	45.0 Mm.	1.77"	Qty	16	
W	200.0 Mm.	8.00"	B	82.5 Mm.	3.24"	Bolt	19.05 Mm.	0.75" (3/4")
L	2235.0 Mm.	88.00"	C	295.0 Mm.	11.61"	Weight	71.52 kg	158.9 Lbs
			D	44.5 Mm.	1.75"			

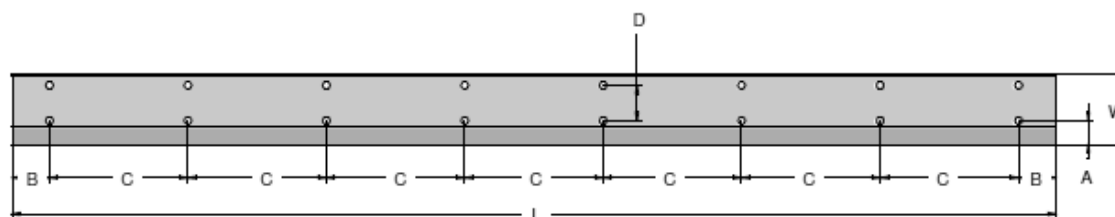

53103208 332/C4390 Right
53103209 332/C4389 Left

Uniteeth - Dimensions		
Dimensiones - Adaptador		
	M/m.	Inch.
A	87.5 Mm.	3.44"
B	57.0 Mm.	2.24"
C	44.5 Mm.	1.75"
D	21.0 Mm.	0.83"
Ø	20.5 Mm.	0.81"

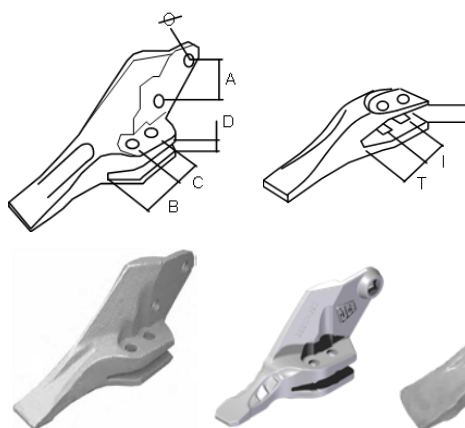


53103205 332/C4388

Uniteeth - Dimensions		
Dimensiones - Adaptador		
	M/m.	Inch.
T	51.0 Mm.	2.00"
I	44.5 Mm.	1.75"
S	21.0 Mm.	0.83"

993-99391

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	8	
W	200.0 Mm.	8.00"	B	85.0 Mm.	3.24"	Bolt	19.05 Mm.	0.75" (3/4")
L	2235.0 Mm.	88.00"	C	295.0 Mm.	11.61"	Weight	71.52 kg	158.9 Lbs
			D	85.0 Mm.	3.24"			

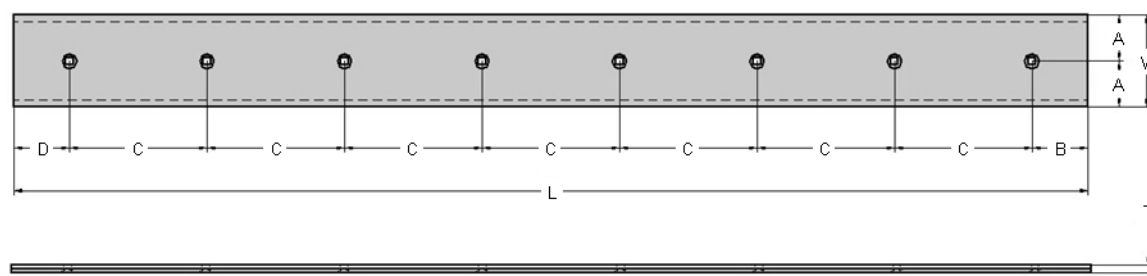

JCB




3CX 4CX

Serial Number

Numero de Serie

General Purpose - Front Buckets						Uso General - Cucharón Frontal		
Bucket– Cucharón 2350 mm. 92.50"								
Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	123-04004	1	20.0	152,4	2350.0	3/4"	16

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant	Tornillos	Tuercas
2	Uniteeth	332/C4388 53103205	6/8	3/4" x 2-1/2" (12)	3/4" (12)
3	Corner Adapter Righth	332/C4390 53103208	1	3/4" x 2-1/2" (2) 3/4" x 2" (2)	3/4" (4)
4	Corner Adapter Left	332/C4389 53103209	1	3/4" x 2-1/2" (2) 3/4" x 2" (2)	3/4" (4)

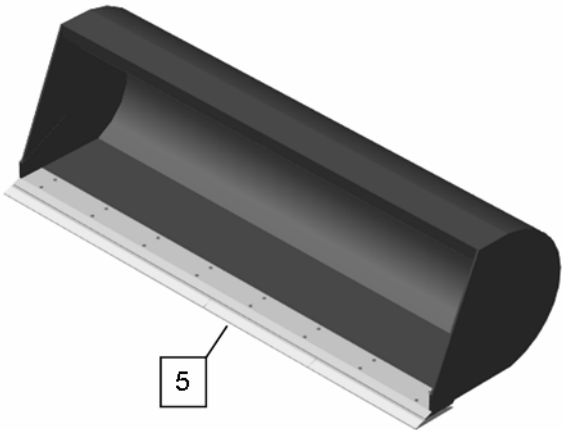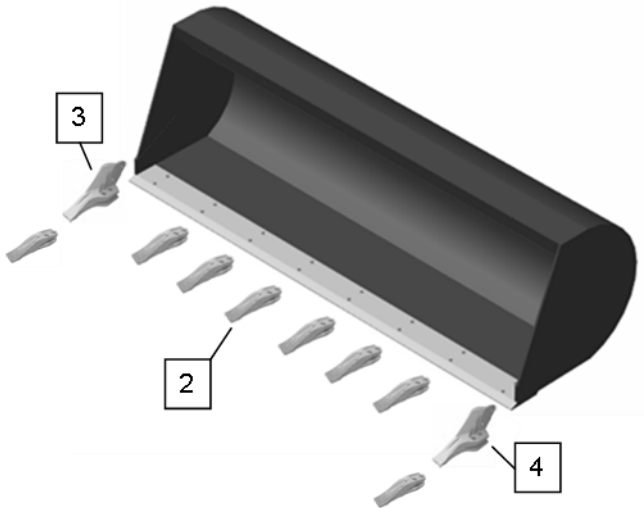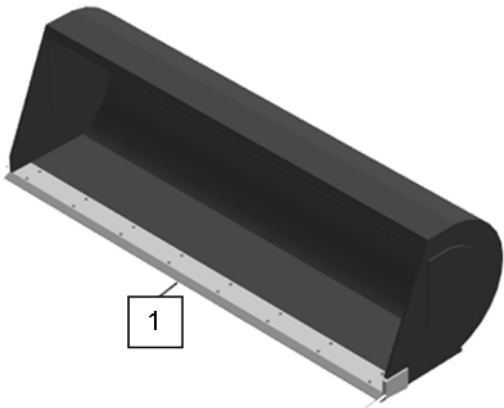


Bolt - On Edges - Subcuchillas										
Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
5	Center Section	993/99189	1	20.0	200.0	2350.0	3/4"	8	3/4" x 2-1/2" (8)	3/4" (8)



123/04004

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.		M/m.	Inch.
T	20.0 Mm.	0.75"	A	43.0 Mm.	1.69"	E	295.0 Mm.	11.61"
W	200.0 Mm.	6.00"	B	45.0 Mm.	1.77"	F	565.0 Mm.	22.24"
L	2350.0 Mm.	92.50"	C	75.0 Mm.	2.95"	G	1220.0 Mm.	48.03"
			D	142.5 Mm.	5.61"	Qty	22	
						Bolt	19.05 Mm.	0.75" (3/4")
						Weight	68.02 kg	151.10 Lbs

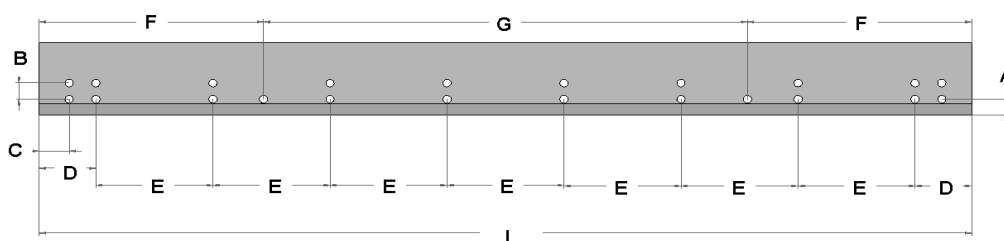


53103208 332/C4390 Right
53103209 332/C4389 Left

Uniteeth - Dimensions

Dimensiones - Adaptador

	M/m.	Inch.
A	87.5 Mm.	3.44"
B	57.0 Mm.	2.24"
C	44.5 Mm.	1.75"
D	21.0 Mm.	0.83"
Ø	20.5 Mm.	0.81"

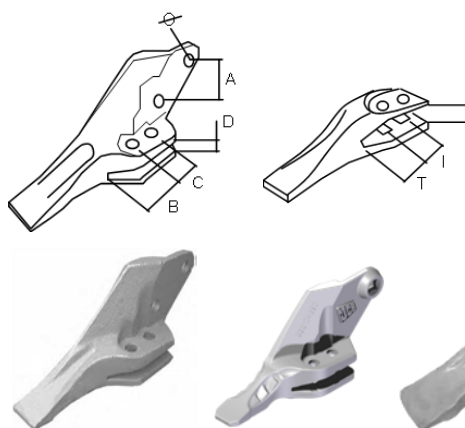

53103205 332/C4388


Uniteeth - Dimensions

Dimensiones - Adaptador

	M/m.	Inch.
T	51.0 Mm.	2.00"
I	44.5 Mm.	1.75"
S	21.0 Mm.	0.83"

993-99391

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.		M/m.	Inch.
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	8	
W	200.0 Mm.	8.00"	B	85.0 Mm.	3.24"	Bolt	19.05 Mm.	0.75" (3/4")
L	2235.0 Mm.	88.00"	C	295.0 Mm.	11.61"	Weight	71.52 kg	158.9 Lbs
			D	85.0 Mm.	3.24"			

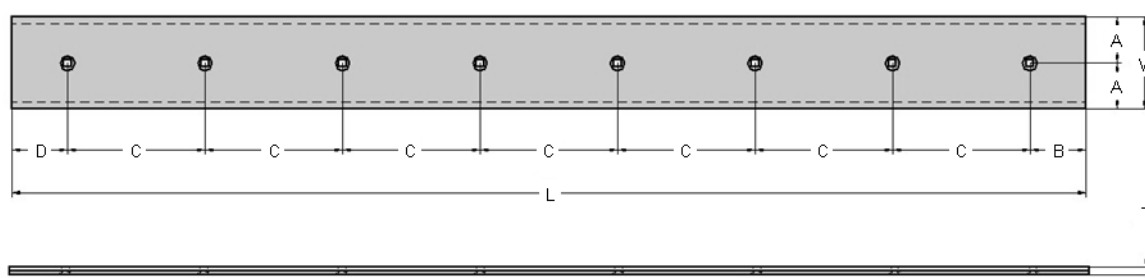

JOHN DEERE


JD 210/C/LE/LJ - 300 D
310 A/B/C/E/SE/G/SG/J/SJ/K/D/SK/L/SL
315 C/CH/D/SE/SG/SJ/SK/SL
325 SK - 410/B/C/D/E/G/J/K/L
500B - 510C - 610B/C - 710B/C

General Purpose - Front Buckets

Uso General - Cucharón Frontal


Bucket- Cucharón 2346 mm. 92.50"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	T118768	1	20.0	152,4	2346.0	5/8"	8

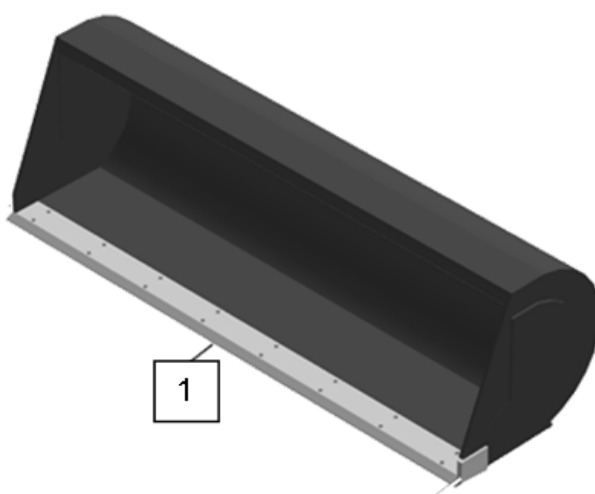


Bolt - On Edges - Subcuchillas

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
2	Center Section	T84194	1	20.0	200.0	2346.0	5/8"	8	5/8" x 2-1/2" (8)	5/8" (8)

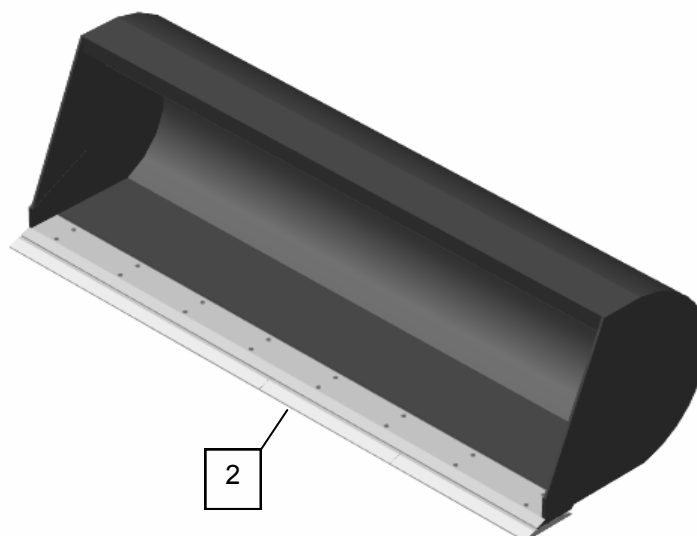



T118768

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	8	
W	152.4 Mm.	6.00"	B	106.2 Mm.	4.18"	Bolt	16.0 Mm.	0.62" (5/8")
L	2346.0 Mm.	92.36"	C	304.8 Mm.	12.00"	Weight	47.22 kg	104.10 Lbs

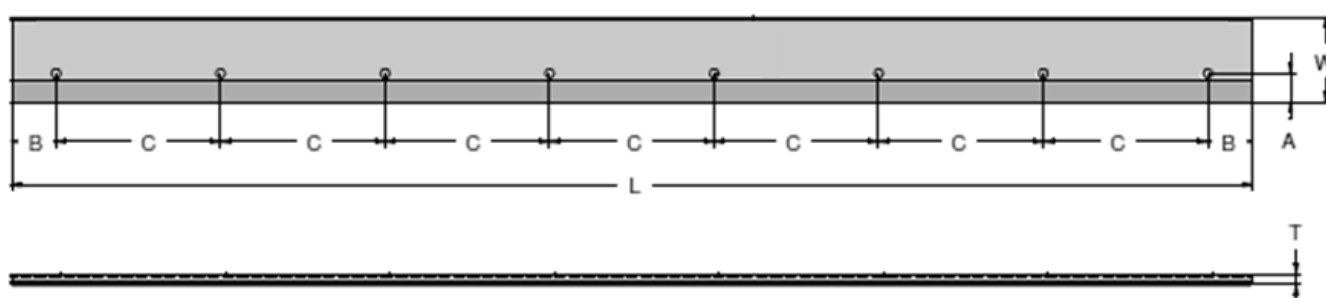
T84194

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	8	
W	200.0 Mm.	8.00"	B	106.2 Mm.	4.18"	Bolt	16.0 Mm.	0.62" (5/8")
L	2346.0 Mm.	92.36"	C	304.8 Mm.	12.00"	Weight	65.77 kg	145.0 Lbs
			D	106.2 Mm.	4.18"			

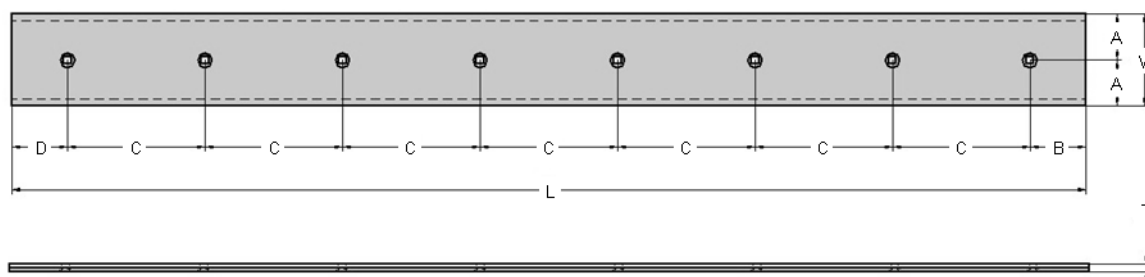

JOHN DEERE


317 G - 318 E/G - 319 E
320 E/G - 323 E - 324 E/G
325 G - 326 E - 328 E - 329 E
330 G - 331 G - 332 E/G - 333 E/G

General Purpose - Front Buckets

Uso General - Cucharón Frontal


Bucket- Cucharón 1930 mm. 76.00"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	T222985	1	20.0	152,4	1930.0	3/4"	7

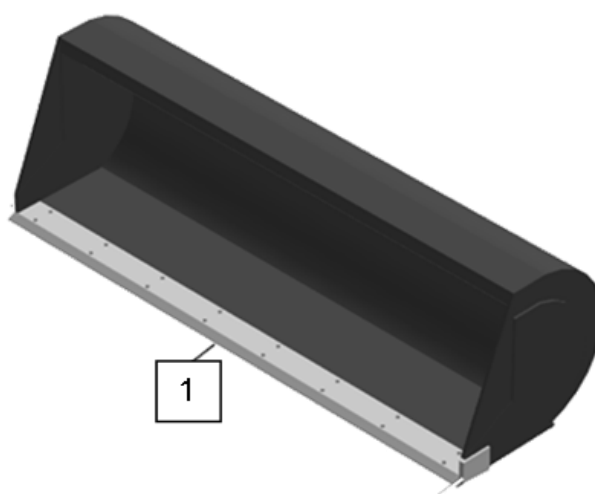

Bolt - On Edges - Subcuchillas


Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
2	Center Section	T223081	1	16.0	152.4	1930.0	3/4"	7	3/4" x 2-1/4" (7)	3/4" (7)

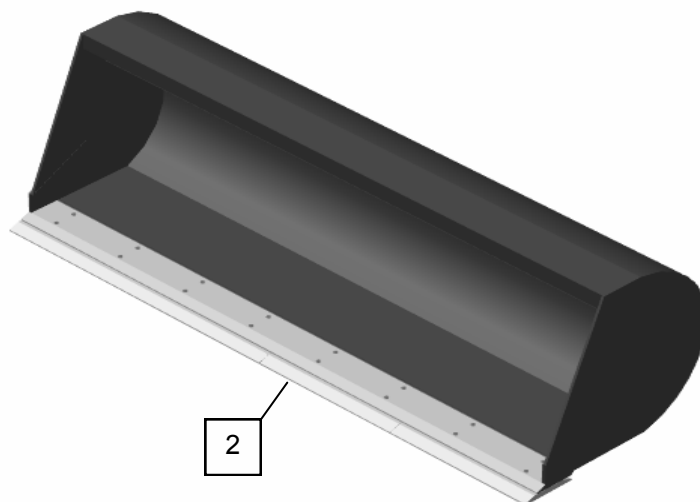




T222985

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	40.0 Mm.	1.57"	Qty	7	
W	152.4 Mm.	6.00"	B	76.0 Mm.	2.99"	Bolt	19.05 Mm.	0.75" (3/4")
L	1930.0 Mm.	75.98"	C	279.4 Mm.	11.00"	Weight	38.69 kg	85.30 Lbs
			D	304.8 Mm.	12.00"			

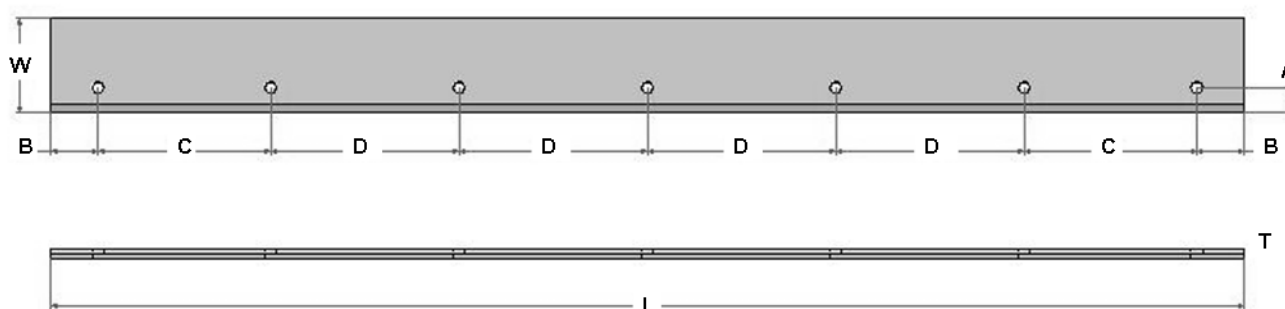

T223081

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	16.0 Mm.	0.62"	A	76.2 Mm.	3.00"	Qty	7	
W	152.4 Mm.	6.00"	B	76.0 Mm.	2.99"	Bolt	19.05 Mm.	0.75" (3/4")
L	1930.0 Mm.	75.98"	C	279.4 Mm.	11.00"	Weight	33.48 kg	73.80 Lbs
			D	304.8 Mm.	12.00"			

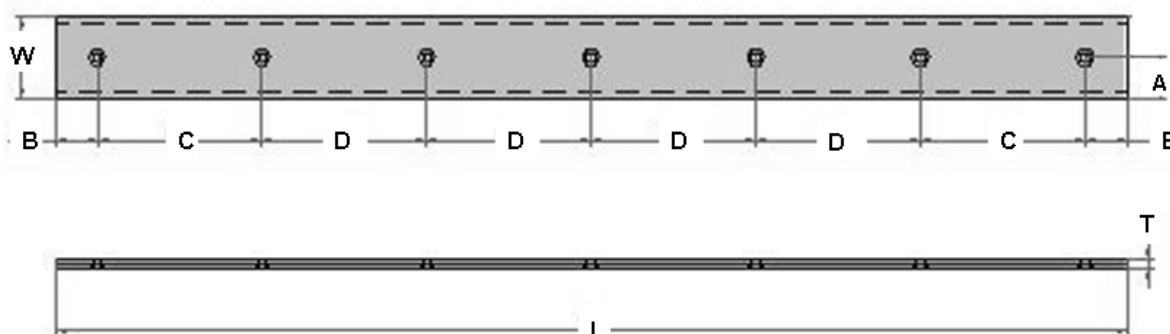

KOMATSU

WB93/95/97

Serial Number

Numero de Serie




General Purpose - Front Buckets

Uso General - Cucharón Frontal

Bucket- Cucharón 2320 mm. 91.33"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	BASE	1	20.0	152,4	2320.0	5/8"	16

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Tornillos	Tuercas
2	Uniteeth	312204054	6/8	5/8" x 2-1/4" (12)	5/8" (12)
3	Corner Adapter Righth	312204053	1	5/8" x 2-1/4" (2) 5/8" x 1-3/4" (2)	5/8" (4)
4	Corner Adapter Left	312204052	1	5/8" x 2-1/4" (12) 5/8" x 1-3/4" (2)	5/8" (4)

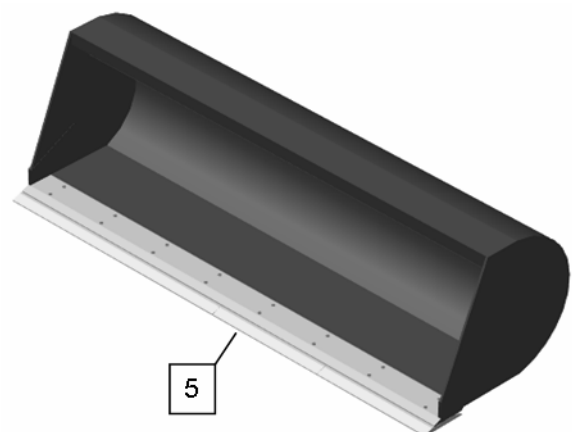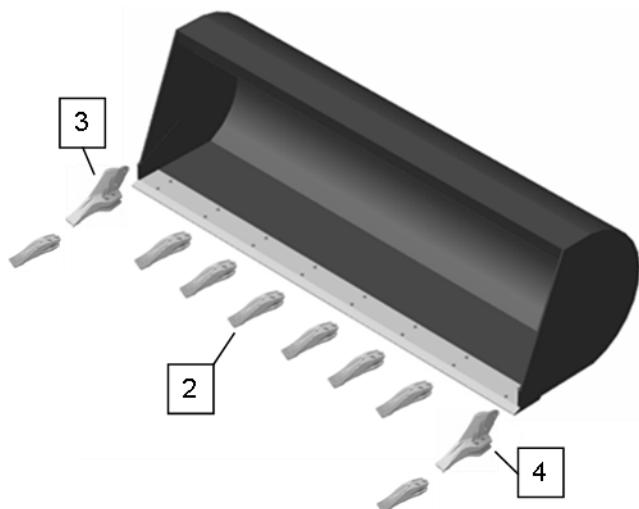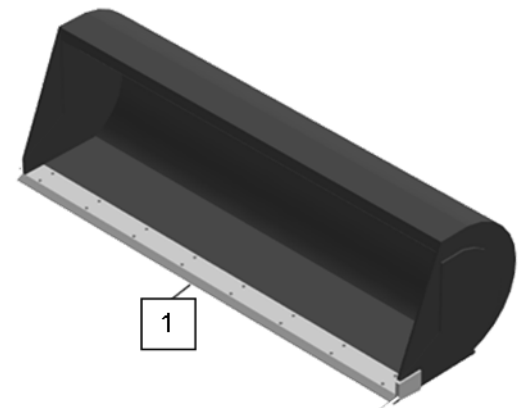


Bolt - On Edges - Subcuchillas

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
5	Center Section	BOLT-ON	1	20.0	200.0	2320.0	5/8"	8	5/8" x 2-1/4" (8)	5/8" (8)

BASE EDGE


Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	16	
W	152.4 Mm.	6.00"	B	75.0 Mm.	2.95"	Bolt	16.0 Mm.	0.62" (5/8")
L	2320.0 Mm.	91.33"	C	310.0 Mm.	12.20"	Weight	49.44 kg	108.9 Lbs
			D	80.0 Mm.	3.15"			

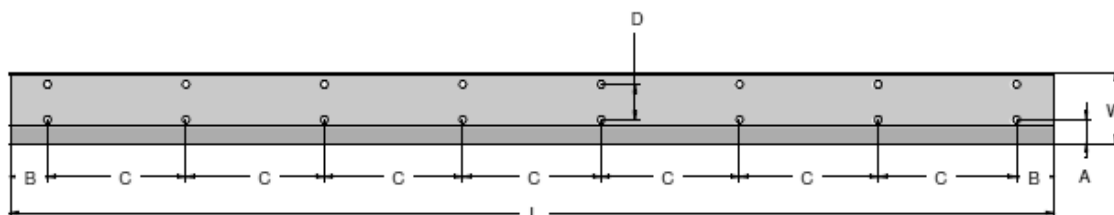

312204053 Right

312204052 Left

Uniteeth - Dimensions		
Dimensiones - Adaptador		
	M/m.	Inch.
A	63.0 Mm.	2.48"
B	65.0 Mm.	2.56"
C	80.0 Mm.	3.15"
D	23.0 Mm.	0.91"
Ø	17.0 Mm.	0.67"

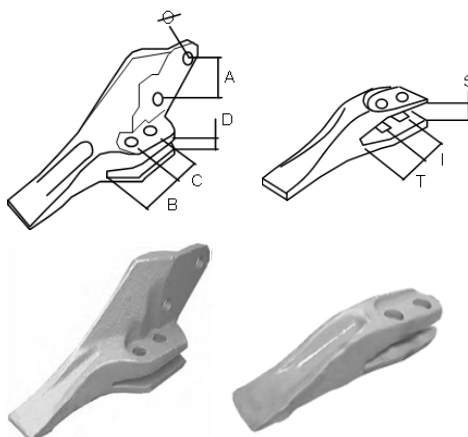


312204054

Uniteeth - Dimensions		
Dimensiones - Adaptador		
	M/m.	Inch.
T	65.0 Mm.	2.56"
I	80.0 Mm.	3.15"
S	23.0 Mm.	0.91"

CENTER SECTION

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	8	
W	203.2 Mm.	8.00"	B	75.0 Mm.	2.95"	Bolt	16.0 Mm.	0.62" (5/8")
L	2320.0 Mm.	91.33"	C	310.0 Mm.	12.20"	Weight	63.18 kg	139.2 Lbs
			D	75.0 Mm.	2.95"			

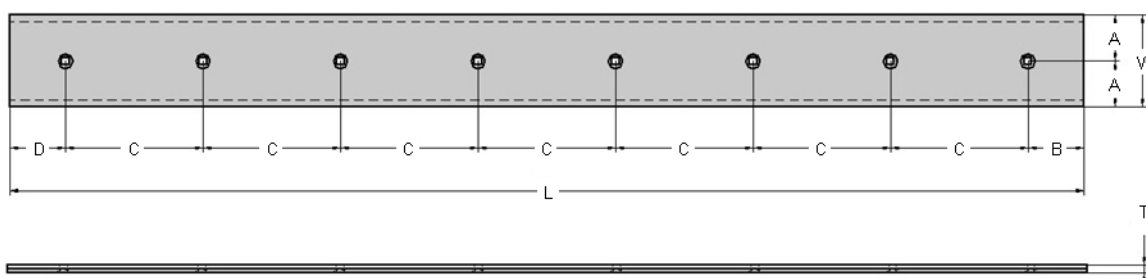

NEW HOLLAND LB110/115

Serial Number


Numero de Serie

General Purpose - Front Buckets



Uso General - Cucharón Frontal

Bucket- Cucharón 2400 mm. 94.48"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	BASE	1	20.0	152,4	2400	5/8"	16

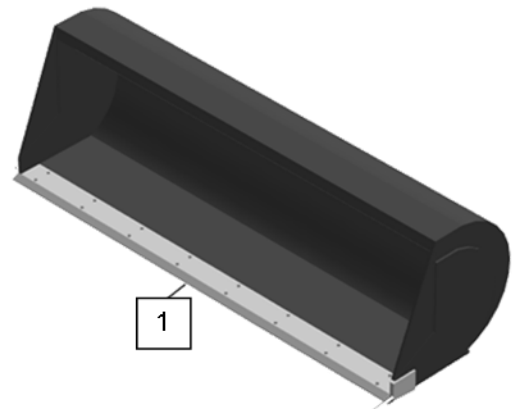

Type	Description	Reference	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Tornillos	Tuercas
2	Uniteeth	82851109	8	5/8" x 2-1/4" (16)	5/8" (16)

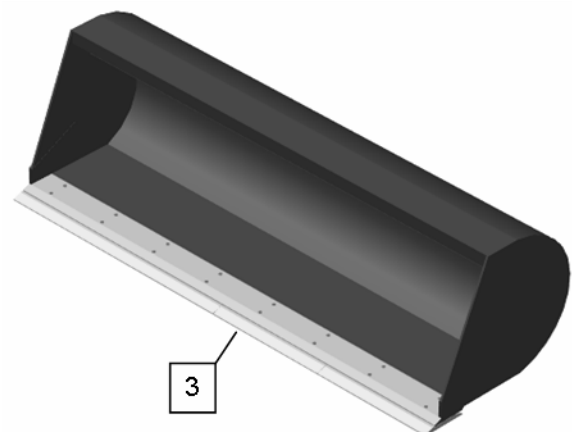
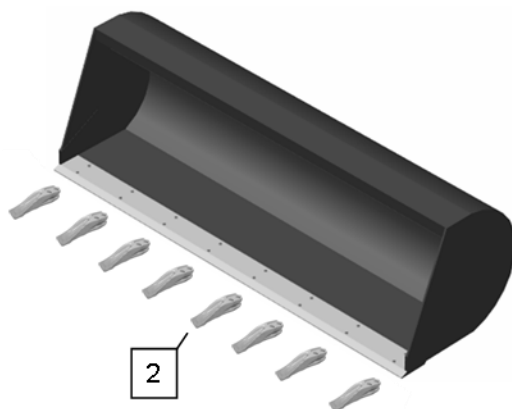


Bolt - On Edges - Subcuchillas


Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
3	Center Section	BOLT-ON	1	20.0	200.0	2400.0	5/8"	8	5/8" x 2-1/4" (8)	5/8" (8)

BASE EDGE

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	16	
W	152.4 Mm.	6.00"	B	115.0 Mm.	4.52"	Bolt	16.0 Mm.	0.62" (5/8")
L	2400.0 Mm.	94.48"	C	310.0 Mm.	12.20"	Weight	51.14 kg	112.6 Lbs
			D	75.0 Mm.	2.95"			

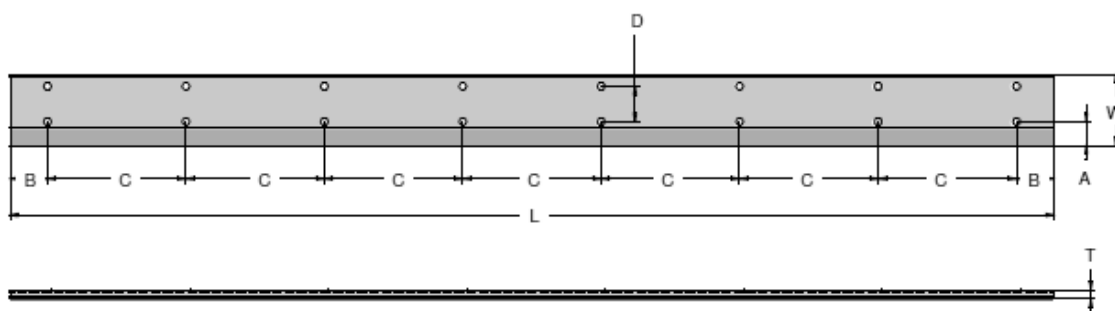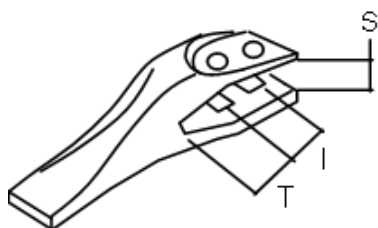

8285110

Uniteeth - Dimensions
Dimensiones - Adaptador

	M/m.	Inch.
T	51.0 Mm.	2.00"
I	75.0 Mm.	2.95"
S	22.0 Mm.	0.86"



CENTER SECTION

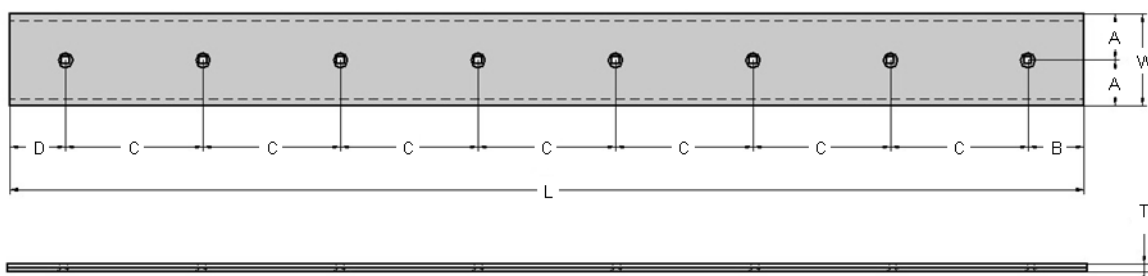Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	8	
W	203.2 Mm.	8.00"	B	115.0 Mm.	4.52"	Bolt	16.0 Mm.	0.62" (5/8")
L	2400.0 Mm.	94.48"	C	310.0 Mm.	12.20"	Weight	65.35 kg	144.0 Lbs
			D	115.0 Mm.	4.52"			



VOLVO

BL60/BL70

Serial Number

Numero de Serie


11891191 11891265 11891264

General Purpose - Front Buckets

Uso General - Cucharón Frontal


Bucket- Cucharón 2350 mm. 92.50"

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.
1	Base Edge	11881240	1	20.0	200.0	2350.0	3/4"	16

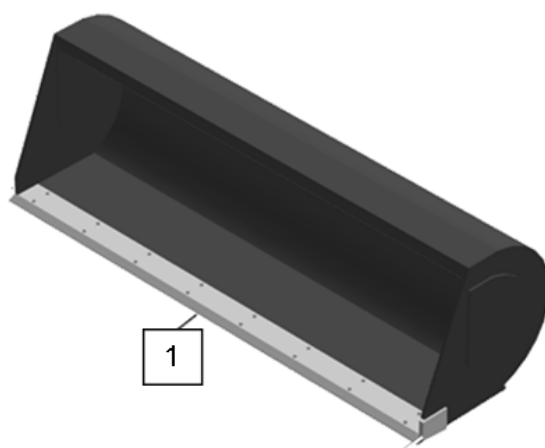


Bolt - On Edges - Subcuchillas

Type	Description	Reference	Qty	Tick	Width	Length	Hole	Qty	Bolts	Nuts
Tipo	Descripción	Referencia	Cant.	Grueso	Ancho	Largo	Taladro	Cant.	Tornillos	Tuercas
2	Center Section	11883780	1	20.0	200.0	2350.0	3/4"	8	3/4" x 2-1/4" (10)	3/4" (8)

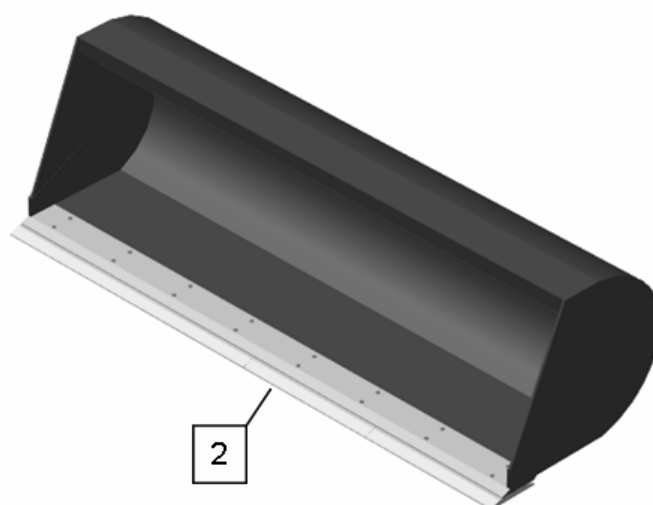


11881240

Dimensions - Base Edge			Hole Spacing			Holes & Weight		
Dimensiones - Cuchilla Base			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	50.0 Mm.	1.96"	Qty	16	
W	200.0 Mm.	8.00"	B	90.0 Mm.	3.54"	Bolt	19.05 Mm.	0.75" (3/4")
L	2350.0 Mm.	92.50"	C	310.0 Mm.	12.21"	Weight	75.02 kg	166.7 Lbs
			D					

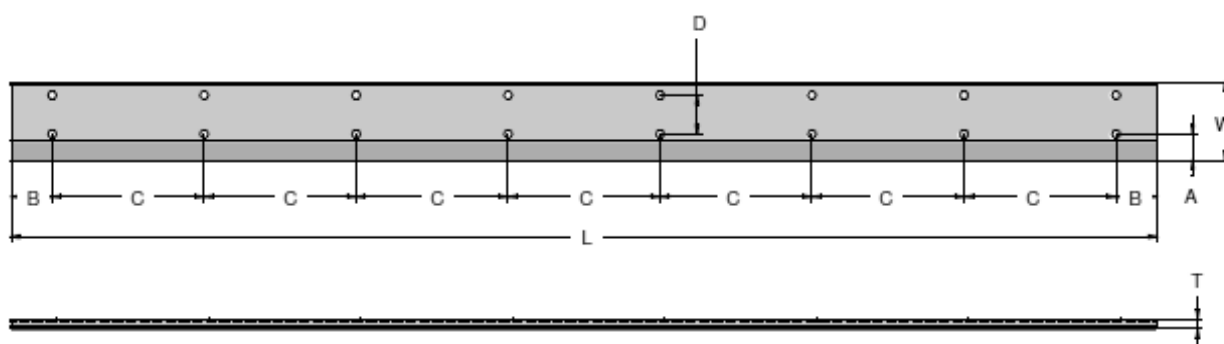
11883780

Dimensions - Bolt On Edges			Hole Spacing			Holes & Weight		
Dimensiones - Subcuchilla			Distancia entre agujeros			Taladros y Peso		
	M/m.	Inch.		M/m.	Inch.			
T	20.0 Mm.	0.75"	A	101.6 Mm.	4.00"	Qty	8	
W	200.0 Mm.	8.00"	B	90.0 Mm.	3.54"	Bolt	19.05 Mm.	0.75" (3/4")
L	2350.0 Mm.	92.50"	C	310.0 Mm.	12.21"	Weight	75.02 kg	166.7 Lbs
			D	90.0 Mm.	3.54"			

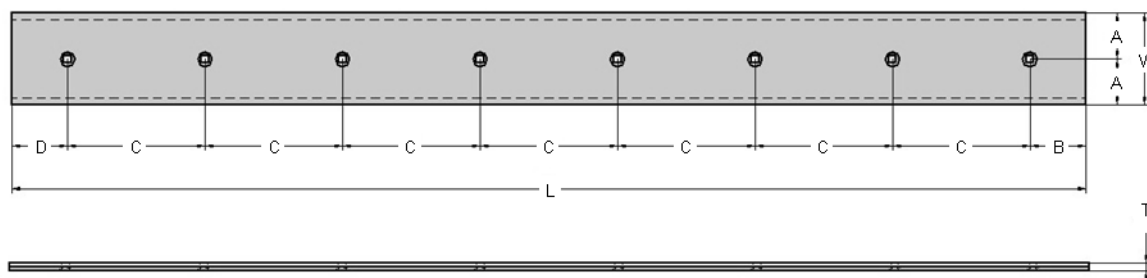



PETRAX

CATÁLOGO MIXTAS PETRAX

EDITION - EDICION 2020